

CYLINDER MEDIUM HP


Cylinder Medium HP is a 20W, surface-mounted, cylindrical downlight suitable for outdoor ceiling installation. It is available in 3000K or 4000K, with 3 optical options, and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	20W (120VAC)
Power Supply	Integral
Construction	Body/Frame: Extruded Copper-Free Aluminum Lens: Tempered, Safety Glass
CCT	3000K, 4000K
Delivered Lumens	2000 lm (10°, 3000K)
Efficacy	100 lm/W
Optics	4°, 10°, 28°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø5.47" x 8.66" h
Fixture Weight	8.82 lbs
LED Source	3 x CREE "XHP35" LED
IP Rating	IP66
IK Rating	IK09

Fixture Dimensions

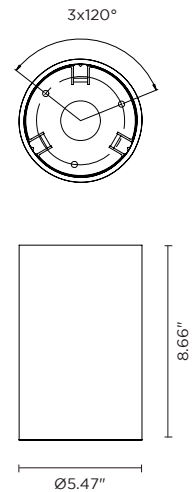

ORDERING INFORMATION

Example: 701206P-30K-10-TG

701206P	-		-		
---------	---	--	---	--	--

Model No.	CCT	Optics	Finish
701206P	30K - 3000K 40K - 4000K	04 - 4° 10 - 10° 28 - 28°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K


Maximum Candela = 32697.5

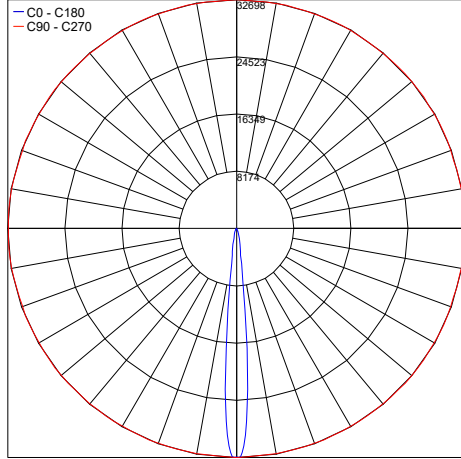

PHOTOMETRIC FILENAME : CYLINDER MEDIUM HP 701206_4° 3000K.IES

4°


Maximum Candela = 17544.2

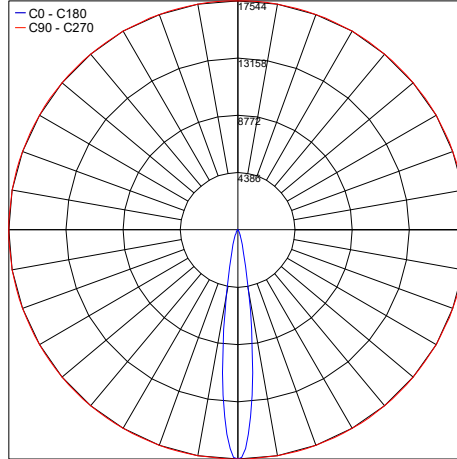

PHOTOMETRIC FILENAME : CYLINDER MEDIUM HP 701206_10° 3000K.IES

10°

Maximum Candela = 8777.3

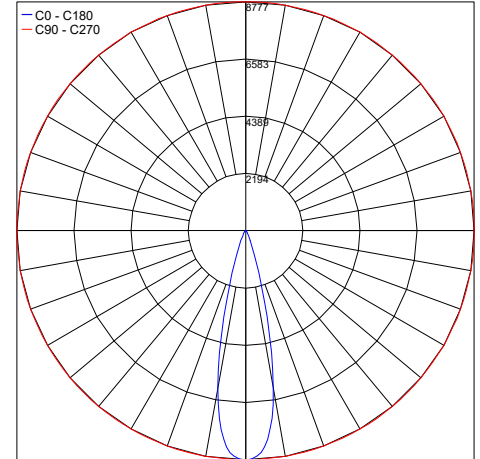

PHOTOMETRIC FILENAME : CYLINDER MEDIUM HP 701206_28° 3000K.IES

28°

Job Name/Date:

Fixture Type Designation: