

CYLINDER MICRO COB


Cylinder Micro COB is a 6W, surface-mounted, cylindrical downlight suitable for outdoor ceiling installation. It is available in 3000K or 4000K, with 3 optical options, and 2 standard finishes.



TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 6W (120VAC) |
| Power Supply | Integral |
| Construction | Body/Frame: Extruded Copper-Free Aluminum Lens: Tempered, Safety Glass |
| CCT | 3000K, 4000K |
| BUG Rating | B0-U4-G0 (3000K) |
| Delivered Lumens | 600 lm (36°, 3000K) |
| Efficacy | 100 lm/W |
| Optics | 18°, 36°, 60° |
| Finishes | Textured Gray, Anthracite Gray, Matte Black (on request) |
| Fixture Dimensions | Ø2.83" x 4.88" h |
| Fixture Weight | 2.20 lbs |
| LED Source | 1 COB CREE "CXB 1304" LED |
| IP Rating | IP66 |
| IK Rating | IK09 |

Fixture Dimensions

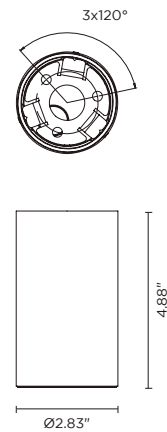

ORDERING INFORMATION

Example: 701201P-30K-60-TG

| | | | | | |
|---------|---|--|---|--|--|
| 701201P | - | | - | | |
|---------|---|--|---|--|--|

| Model No. | CCT | Optics | Finish |
|-----------|----------------------------|----------------------------------|--|
| 701201P | 30K - 3000K 40K - 4000K | 18 - 18° 36 - 36° 60 - 60° | TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request) |


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note all Photometry is 3000K


Maximum Candela = 1614.2

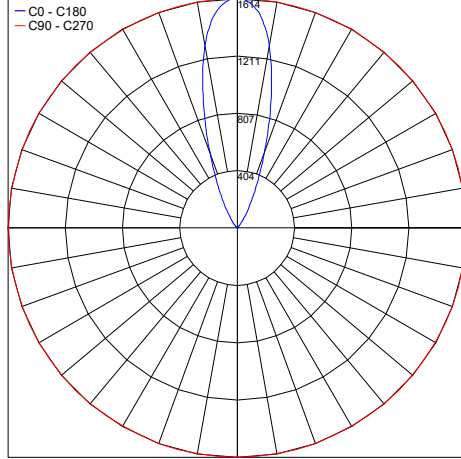

PHOTOMETRIC FILENAME : CYLINDER MICRO COB 701201_36° 30K.IES

36°

Maximum Candela = 635

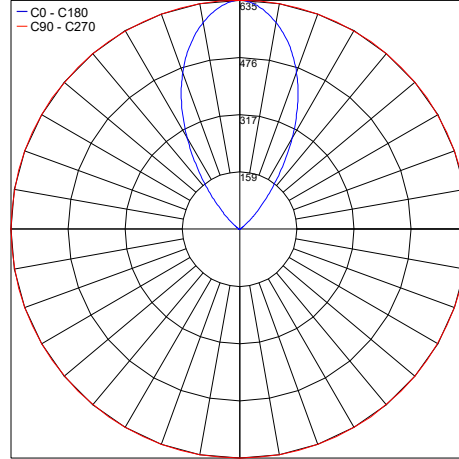

PHOTOMETRIC FILENAME : CYLINDER MICRO COB 701201_60° 30K.IES

60°

Job Name/Date:

Fixture Type Designation: