

CYLINDER MICRO COB


Cylinder Micro COB is a 6W, surface-mounted, cylindrical downlight suitable for outdoor ceiling installation. It is available in 3000K or 4000K, with 3 optical options, and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	6W (120VAC)
Power Supply	Integral
Construction	Body/Frame: Extruded Copper-Free Aluminum Lens: Tempered, Safety Glass
CCT	3000K, 4000K
Delivered Lumens	600 lm (36°, 3000K)
Efficacy	100 lm/W
Optics	18°, 36°, 60°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø2.83" x 4.88" h
Fixture Weight	2.20 lbs
LED Source	1 COB CREE "CXB 1304" LED
IP Rating	IP66
IK Rating	IK09

Fixture Dimensions

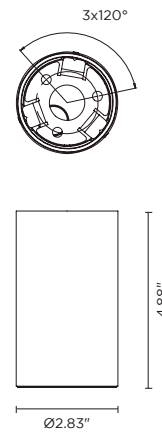

ORDERING INFORMATION

Example: 701201P-30K-60-TG

701201P	-		-		
---------	---	--	---	--	--


Model No.	CCT	Optics	Finish
701201P	30K - 3000K 40K - 4000K	18 - 18° 36 - 36° 60 - 60°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K

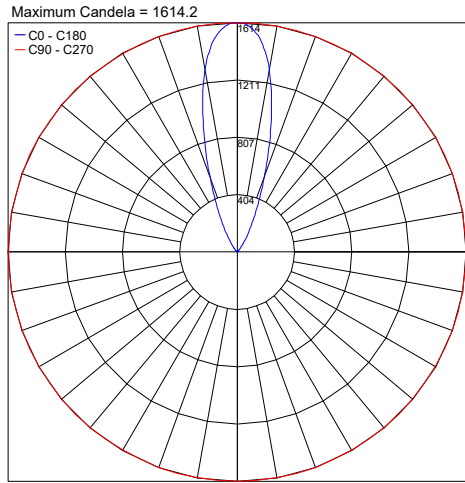

PHOTOMETRIC FILENAME : CYLINDER MICRO COB 701201_36° 30K.IES

36°

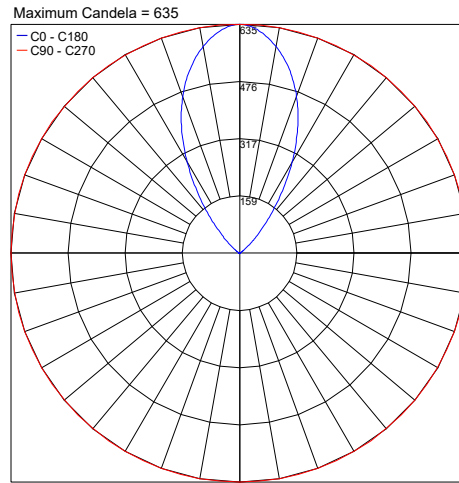

PHOTOMETRIC FILENAME : CYLINDER MICRO COB 701201_60° 30K.IES

60°

Job Name/Date:

Fixture Type Designation: