

# THE TUBE NANO 48V


The Tube Nano 48V is a pendant for the 48V Nano track system with a diameter of only 0.6" making it extremely discrete and elegant in shape. It is available in various finishes; white, black, chromed, anodized champagne and rose gold and fitted with the latest generation LED source with a light output able to highlight individual details within the space.

## TECHNICAL DATA

<b>Wattage / Input</b>	4.5W
<b>Track Power Supply</b>	Remote 48VDC power supply for track, not included. See 48V Track datasheet
<b>Track Head</b>	Integral 48V LED Converter in Track Adapter
<b>Dimming</b>	Non-Dim, 0-10V, Dali
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	360 lm (3000K)
<b>Efficacy</b>	80 lm/W (3000K)
<b>Optics</b>	Narrow Beam
<b>Finishes</b>	5 standard, See Below
<b>Fixture Dimensions</b>	Ø0.6" x 19.7" with adjustable length cord
<b>Fixture Weight</b>	1.10 lbs
<b>IP Rating</b>	IP40



Fixture Dimensions

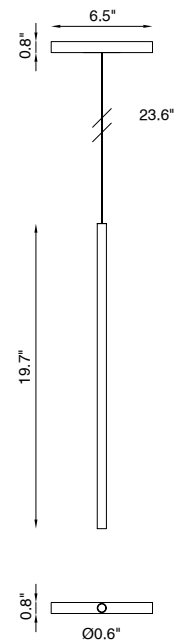

## ORDERING INFORMATION

Example: BUT048L00022A10030110.US. Track ordered separately.

BUT048L00022		00			0	US
Model No.	Finish	Optic	CCT	Dimmability		
BUT048L00022	W1 - White B1 - Black CP - Chromed A1 - Champagne A2 - Rose Gold	00 - Narrow Beam	27 - 2700K 30 - 3000K	ND - Non Dimmable 11 - 0-10V Dimming DA - DALI	0	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


48VDC - See Track Datasheets

## 48V NANO TRACKS

N10




See N10 Track  
datasheet for  
ordering code  
and power supply



N-INSIDE




See N-Inside Track  
datasheet for  
ordering code  
and power supply



## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 112.3

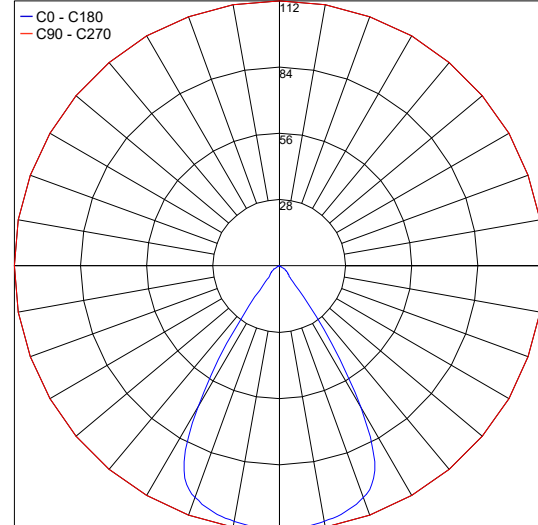

PHOTOMETRIC FILENAME : BUT048L00022.IES

Job Name/Date:

Fixture Type Designation: