

X1 NANO 48V


X1 Nano 48V is a minimalist, versatile cylindrical LED projector for interiors, suitable to be installed on a 48V track, and fitted with an adjustable arm which can be tilted over a vertical axis of 360° and a horizontal axis of 90°. It is available in 2 light distributions, 3 color temperatures, and 4 standard finishes.



TECHNICAL DATA

Wattage / Input	6W
Track Power Supply	Remote 48VDC power supply for track, not included. See 48V Track datasheet
Track Head	Integral 48V LED Converter in Track Adapter
Dimming	Non-Dim, Dali
Construction	Body: Aluminum Lens: Opal Diffused
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	520 lm (3000K)
Efficacy	86.7 lm/W (3000K)
Optics	22°, 50° Rotatable ±360°, ±90°
UGR Rating	—
Finishes	White, Black, Champagne, Rose Gold
Fixture Dimensions	Ø1.2" x 3.7"
Fixture Weight	0.88 lbs

Fixture Dimensions

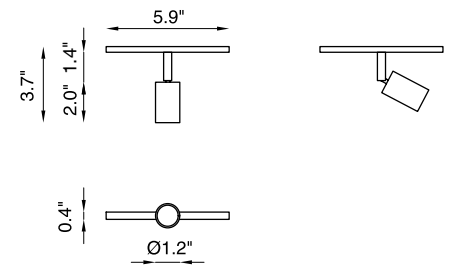

ORDERING INFORMATION

Example: **BUT048L00017W12230ND0.US**. Power Supplies ordered separately.

BUT048L00017					0	US
Model No.	Finish	Optic	CCT	Dimmability		
BUT048L00017	W1 - White B1 - Black A1 - Champagne A2 - Rose Gold	22 - 22° 50 - 50°	27 - 2700K 30 - 3000K 40 - 4000K	ND - Non Dimmable DA - DALI	0	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


48VDC - See Track Datasheets

48V NANO TRACKS

N10




See N10 Track datasheet for ordering code and power supply



N-INSIDE




See N-Inside Track datasheet for ordering code and power supply



PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 1874.3

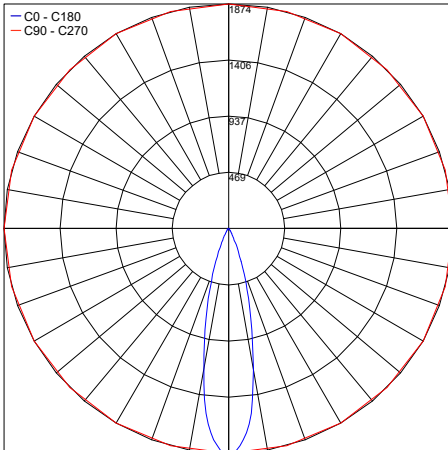

PHOTOMETRIC FILENAME : X1 NANO 48V - BUT048L00017.IES

Job Name/Date:

Fixture Type Designation: