

# X1 NANO 48V


X1 Nano 48V is a minimalist, versatile cylindrical LED projector for interiors, suitable to be installed on a 48V track, and fitted with an adjustable arm which can be tilted over a vertical axis of 360° and a horizontal axis of 90°. It is available in 2 light distributions, 3 color temperatures, and 4 standard finishes.

## TECHNICAL DATA

<b>Wattage / Input</b>	6W
<b>Track Power Supply</b>	Remote 48VDC power supply for track, not included. See 48V Track datasheet
<b>Track Head</b>	Integral 48V LED Converter in Track Adapter
<b>Construction</b>	Body: Aluminum Lens: Opal Diffused
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	520 lm (3000K)
<b>Efficacy</b>	86.7 lm/W (3000K)
<b>Optics</b>	22°, 50° Rotatable ±360°, ±90°
<b>UGR Rating</b>	—
<b>Finishes</b>	White, Black, Champagne, Rose Gold
<b>Fixture Dimensions</b>	Ø1.2" x 3.7"
<b>Fixture Weight</b>	0.88 lbs
<b>IP Rating</b>	IP40



Fixture Dimensions

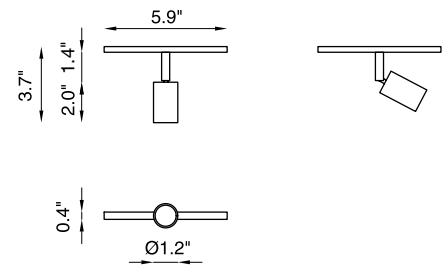

## ORDERING INFORMATION

Example: BUT048L00017W12230ND0.US. Power Supplies ordered separately.

BUT048L00017					0	US
<b>Model No.</b>	<b>Finish</b>	<b>Optic</b>	<b>CCT</b>	<b>Dimmability</b>		
BUT048L00017	W1 - White B1 - Black A1 - Champagne A2 - Rose Gold	22 - 22° 50 - 50°	27 - 2700K 30 - 3000K 40 - 4000K	ND - Non Dimmable DA - DALI 11 - 0-10V	0	US

Job Name/Date:


Fixture Type Designation:

## SUGGESTED POWER SUPPLIES


48VDC - See Track Datasheets

## 48V NANO TRACKS

N10

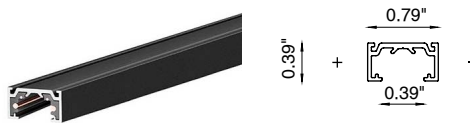


See N10 Track  
datasheet for  
ordering code  
and power supply

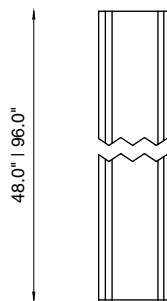

N-INSIDE




See N-Inside Track  
datasheet for  
ordering code  
and power supply

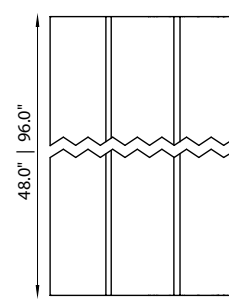

## PHOTOMETRIC DATA

*Note: All photometry is 3000K*

Maximum Candela = 1874.3

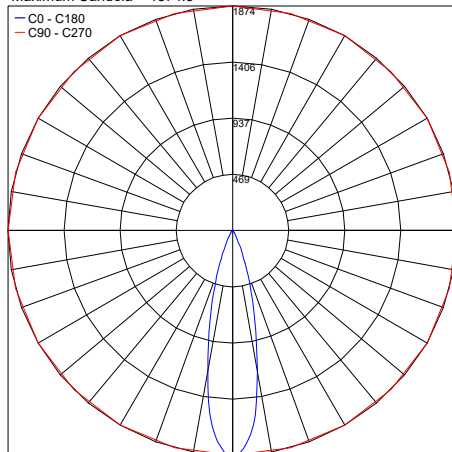

PHOTOMETRIC FILENAME : X1 NANO 48V - BUT048L00017.IES

Job Name/Date:

Fixture Type Designation: