

# Y1 NANO 48V


Y1 Nano 48V is a versatile, cylindrical LED projector for interiors, suitable to be installed on a 48V track, and fitted with a 360° adjustable arm on the 360° vertical axis and 90° horizontal axis, with incorporated joints. It is available in 2 light distributions, 3 color temperatures, and 4 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W
<b>Track Power Supply</b>	Remote 48VDC power supply for track, not included. See 48V Track datasheet
<b>Track Head</b>	Integral 48V LED Converter in Track Adapter
<b>Dimming</b>	Non-Dim, Dali
<b>Construction</b>	Body: Aluminum
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	411 lm (12°, 3000K) 260 lm (50°, 3000K)
<b>Efficacy</b>	51.4 lm/W (12°, 3000K) 32.5 lm/W (50°, 3000K)
<b>Optics</b>	22°, 50° Rotatable ±360° vertical, ±90° horizontal
<b>UGR Rating</b>	—
<b>Finishes</b>	White, Black, Chromed, Brass
<b>Fixture Dimensions</b>	Ø1.2" x 4.6"
<b>Fixture Weight</b>	0.88 lbs
<b>IP Rating</b>	IP40

Fixture Dimensions

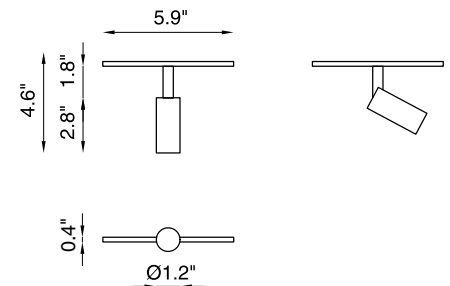

## ORDERING INFORMATION

Example: BUT048L00021W15030ND0.US. Power Supplies ordered separately.

BUT048L00021					0	US
Model No.	Finish	Optic	CCT	Dimmability		
BUT048L00021	W1 - White B1 - Black CP - Chromed BR - Brass	22 - 22° 50 - 50°	27 - 2700K 30 - 3000K 40 - 4000K	ND - Non Dimmable DA - DALI	0	US

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

48VDC - See Track Datasheets


## 48V NANO TRACKS

N10


N-INSIDE



See N10 Track datasheet for ordering code and power supply




See N-Inside Track datasheet for ordering code and power supply



## PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 1704.5

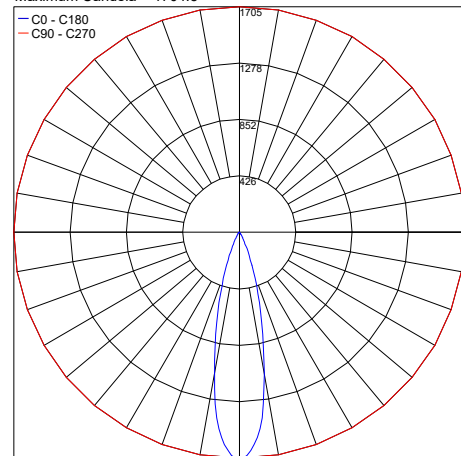

PHOTOMETRIC FILENAME : Y1 22° 48V NANO - BUT048L00021B12230ND.IES

Maximum Candela = 761.3

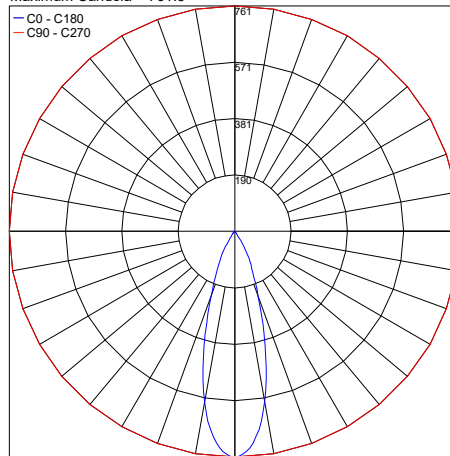

PHOTOMETRIC FILENAME : Y1 50° 48V NANO - BUT048L00021B15030ND.IES

Job Name/Date:

Fixture Type Designation: