

Z1 NANO 48V


Z1 Nano 48V is a miniature, cylindrical LED projector with a diameter of 0.9", suitable for indoor installation on a 48V track, and completely adjustable over vertical and horizontal axes. It is available in 2 light distributions, 3 color temperatures, and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	6W
Track Power Supply	Remote 48VDC power supply for track, not included. See 48V Track datasheet
Track Head	Integral 48V LED Converter in Track Adapter
Dimming	Non-Dim, Dali
Construction	Body: Aluminum
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	372 lm (12°, 3000K) 265 lm (50°, 3000K)
Efficacy	62 lm/W (12°, 3000K) 44.2 lm/W (50°, 3000K)
Optics	22°, 50° Rotatable ±360° vertical, ±90° horizontal
UGR Rating	—
Finishes	White, Black
Fixture Dimensions	Ø0.9" x 3.9"
Fixture Weight	0.88 lbs
IP Rating	IP40

Fixture Dimensions

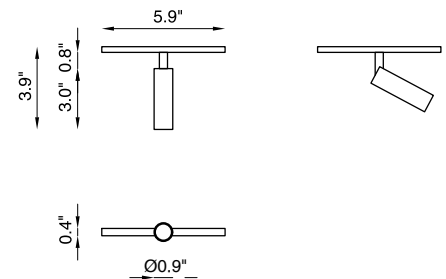

ORDERING INFORMATION

Example: BUT048L00018W15030ND0.US. Power Supplies ordered separately.

BUT048L00018					0	US
Model No.	Finish	Optic	CCT	Dimmability		
BUT048L00018	W1 - White B1 - Black	22 - 22° 50 - 50°	27 - 2700K 30 - 3000K 40 - 4000K	ND - Non Dimmable DA - DALI	0	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

48VDC - See Track Datasheets


48V NANO TRACKS

N10


N-INSIDE



See N10 Track datasheet for ordering code and power supply




See N-Inside Track datasheet for ordering code and power supply



PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 878.1

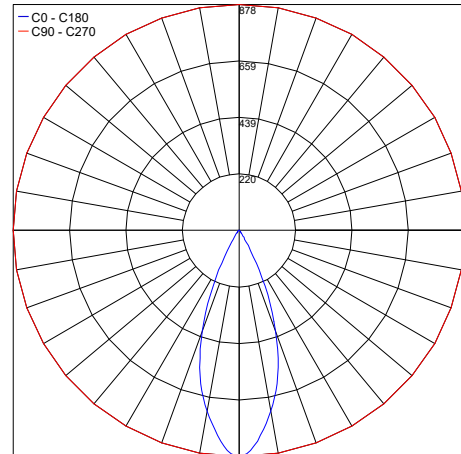

PHOTOMETRIC FILENAME : Z1 48V NANO 22° - BUT048L00018B12230ND0.IES

Maximum Candela = 436.4

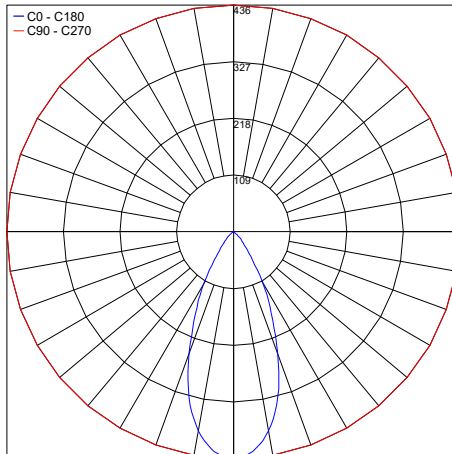

PHOTOMETRIC FILENAME : Z1 48V NANO 50° - BUT048L00018B15030ND0.IES

Job Name/Date:

Fixture Type Designation: