



BENTH

T100

H20
H40
H80

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042


← BENTH T-100 H40, INOX NATURAL, 4000K







Spike for driving into the ground

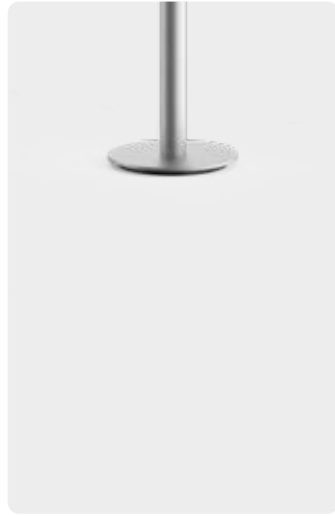

New
Aesthetic flange



New
Casing flange





Head swiveling



Rotation joint with stainless steel cable protector spring detail



AISI 316L stainless steel head and body with 4 lenses




Red Dot
Design Award


Stainless steel AISI 316L stem spotlight. Adjustable head and adaptable, variable stem height. Extra-clear black silk-screened tempered diffuser, 0.16 inches thick. Power cable inserted within the stem for protection against cuts and accidental damage, covered with a burnished stainless-steel spring. Equipped with 4 LEDs with 20° and 45° optics and color temperatures of 2700K, 3000K, and 4000K. Installation accessories include spike for ground insertion or baseplate installation with polyethylene counter-casing. Form work accessory available for in-ground or concrete installation, which can be accessorized with a bottom cap and plaster guard cap. Version with baseplate for installation using anchors. Available multi-socket IP66 plug-in box made of thermoplastic material for powering up to 4 devices. Remote power supply. Surface finish HCT available in three variants.

T100

T100 FL

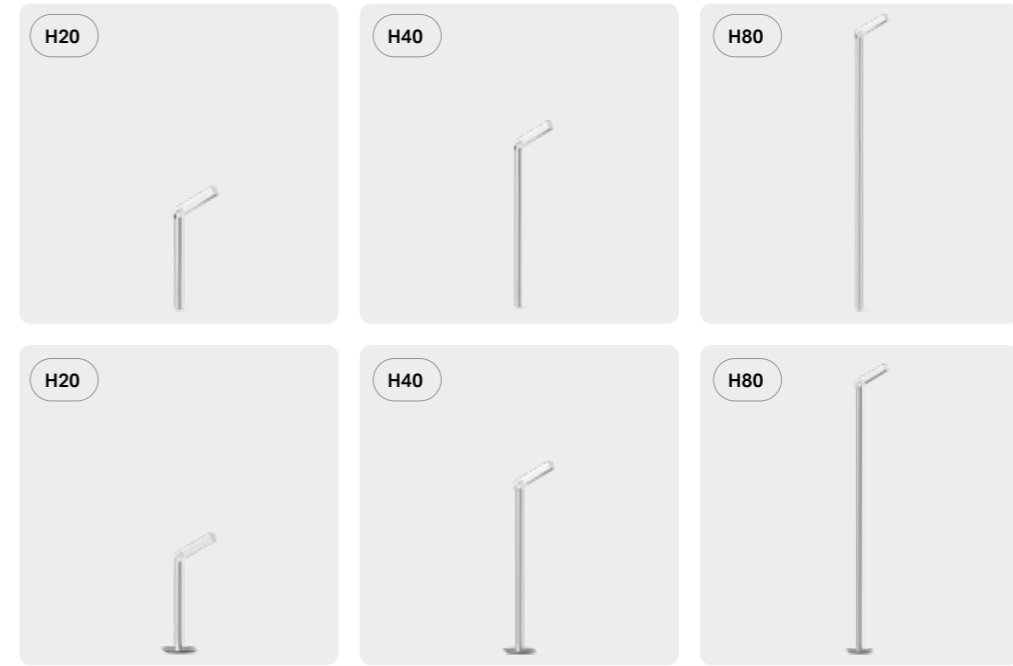


T100

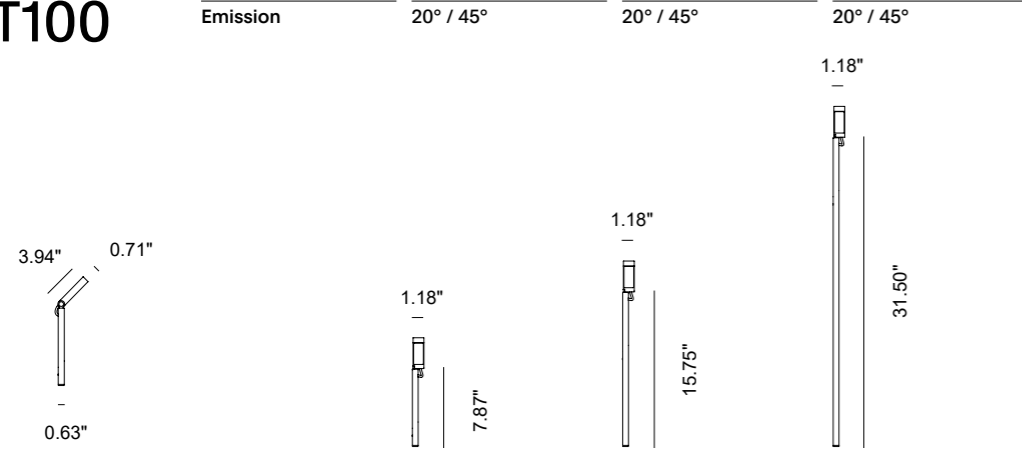

Info	Temperature	2700K (409 lm) / 3000K (433 lm) / 4000K (466 lm)
	Power	LED 5W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK07, IP65, DALI
	Accessories	P2, F1, C20, T10, T2, A1, B1

T100 FL

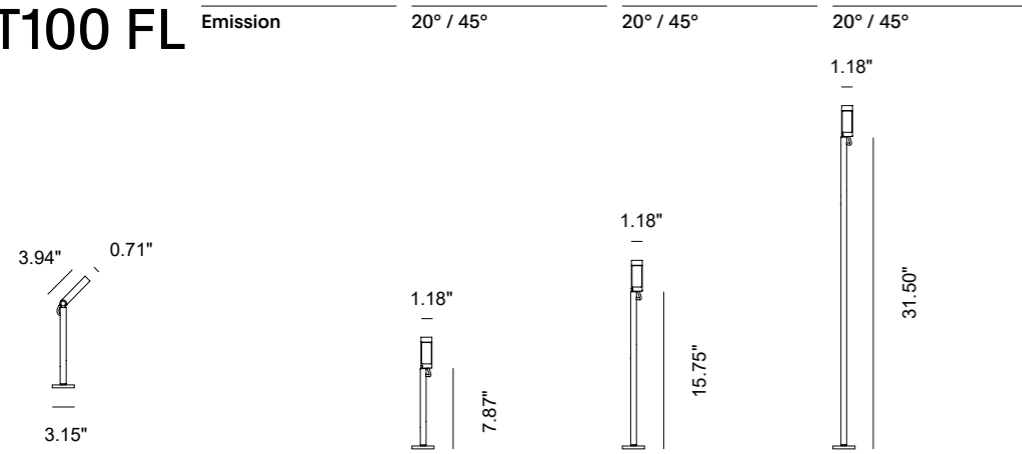

Info	Temperature	2700K (409 lm) / 3000K (433 lm) / 4000K (466 lm)
	Power	LED 5W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK07, IP65, DALI
	Accessories	A1

Accessories	P2	F1	C20	T10	T2

