

# CAUSEWAY M-01


Causeway is a stainless steel, IP66-rated, square bollard inspired by the basalt columns of the Giant's Causeway in Ireland, tavailable in 3 heights with a pole top available with 1, 2, or 3 LEDs with frontal emission. Causeway M-01 is the single LED version, available in 3 color temperatures, 4 optics, and 3 Hard Coated Treatment finishes. Available flange with anchor bolts for installation in concrete.



## TECHNICAL DATA

<b>Wattage</b>	5W (M01)
<b>Power Supply</b>	Integral 120VAC
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B0-U3--G2 (21°, 3000K) B0-U3-G1 (45°, 65°, 3000K) B0-U1-G0 (Asym, 3000K)
<b>Delivered Lumens</b>	416 lm (M01 - 3000K, 45°)
<b>Efficacy</b>	110 lm/W (3000K)
<b>Optics</b>	21°, 45°, 65°, Asymmetrical
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	2.36" x 2.76" x 11.81"
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08

Fixture Dimensions



**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. Available in three finishes *Inox Natural*, *Inox Graphite* and *Inox Bronze*. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

## ORDERING INFORMATION

Example: SPT6041034G.US. Accessories sold separately.

SPT604	10				.US
Model No.	Height	CCT	Optics	Finishes	
SPT604	10 - 11.81" (single)	2 - 2700K 3 - 3000K 4 - 4000K	2 - 20° 4 - 45° 6 - 65° 7 - Asymmetrical	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

## FINISHES



Inox Natural




Inox Graphite




Inox Bronze

## ACCESSORIES



**PT66000**  
Flange with 4 anchor bolts  
for CAUSEWAY  
**(REQUIRED)**




2.36"


## PHOTOMETRIC DATA

Note: All photometrics are 3000K


Maximum Candela = 1993.5

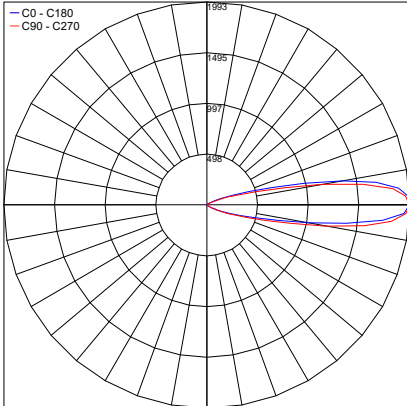


Maximum Candela = 674.2

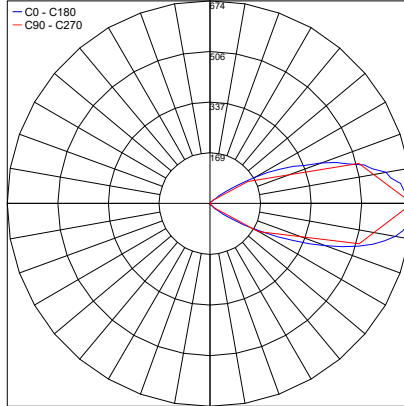

Maximum Candela = 388.3

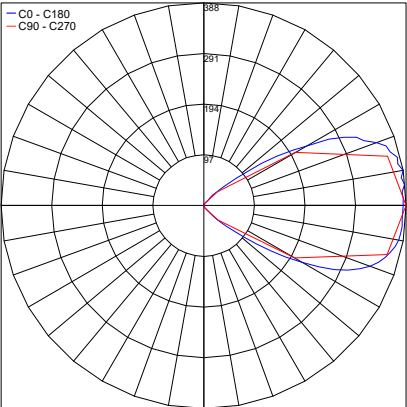

Maximum Candela = 455.7

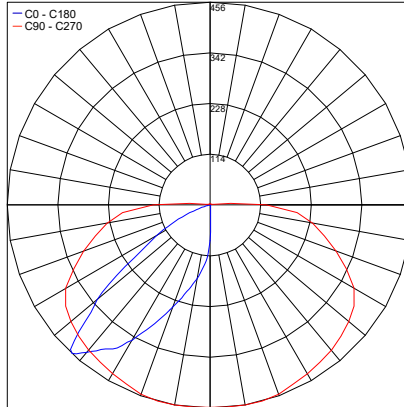

Job Name/Date:

Fixture Type Designation: