

CAUSEWAY

About

Moving to Ireland, on the north-east coast, we find the Giant's Causeway, in the UNESCO World Heritage Sites list, a path strewn with basalt columns of volcanic origin whose evocative shape of the rocks has inspired ancient legends of giants and titans battles. The CAUSEWAY bollard line was born from this suggestion.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

M 01



Inox Natural



Inox Graphite



Inox Bronze



STRAL

M 02



Inox Natural



Inox Graphite



Inox Bronze



M 03




Inox Natural



Inox Graphite




Inox Bronze

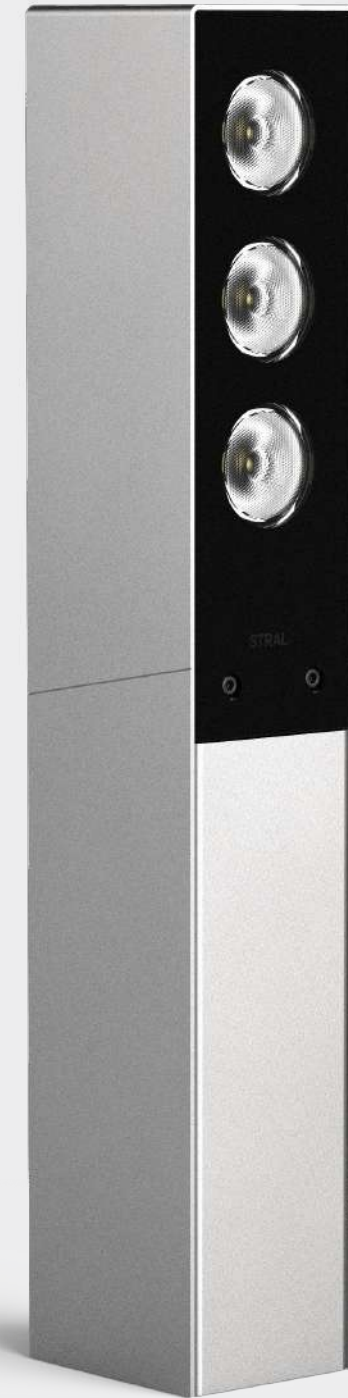


Bollard available in three heights depending on the selected pole head, in AISI 316L stainless steel. Pole top available in versions with one, two or three LEDs with frontal emission. 21°, 45° and 65° optics at 2700K, 3000K and 4000K. Flush black silk-screened extra-clear tempered glass, 0.16" thick. Integrated power supply. Flange with anchor bolts for installation in concrete. HCT surface finish available in three variants.

CAUSEWAY M01



11.81"

2.76"



11.81"

2.36"


| Color | | | Emission | | |
|------------------|---|----------------------------|---|-----------------------------|--|
| 2700 K 543 lm | 3000 K 550 lm | 4000 K 613 lm | | | |
| Power 5W |  | Codes Technical details |  21° | | |
| | | |  45° | | |
| | | |  65° | | |
| IP66 | | IK08 | | Accessories sold separately | |

CAUSEWAY M02



13.39"

2.76"



13.39"

2.36"


| Color | | | Emission |
|-------------------|--|-----------------------------|--|
| 2700 K 1087 lm | 3000 K 1100lm | 4000 K 1227 lm |  21° |
| | | |  45° |
| Power 10W |  | Codes Technical details |  65° |
| | | | |
| IP66 | IK08 | Accessories sold separately | |

CAUSEWAY M03




14.96"

2.76"



14.96"

2.36"

| | | | |
|---------|---|-----------------------------|---|
| Color | | | Emission |
| 2700 K | 3000 K | 4000 K |  21° |
| 1630 lm | 1650 lm | 1840 lm | |
| Power | | |  45° |
| 15W |  | Codes Technical details | |
| | | |  65° |
| | | | |
| IP66 | IK08 | Accessories sold separately | |

