



CAUSEWAY

M

01
02
03

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

← CAUSEWAY M01, INOX NATURAL, 3000K





CAUSEWAY M01, INOX NATURAL, FRONT ↑
CAUSEWAY M01, INOX NATURAL, BACK →



Dowel fixing flange





Head fixing detail




Anti-glare shielding lens

Bollard available in three heights depending on selected head, in stainless steel AISI 316L. The bollard head is available in one, two, or three LED versions with frontal emission. Optics include 21°, 45°, 65°, and asymmetric with anti-glare filter. Color temperatures of 2700K, 3000K, and 4000K. Extra-clear black silk-screened tempered glass, 0.16 inches thick. Installation on a flange with anchor bolts for concrete application or, alternatively, a plate for fixing with anchors. Surface finish HCT available in three variants. Integrated power supply.


M01

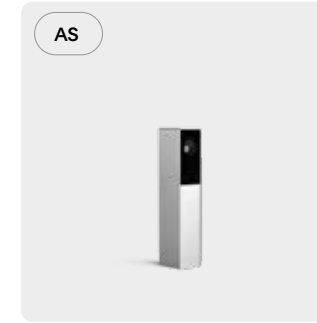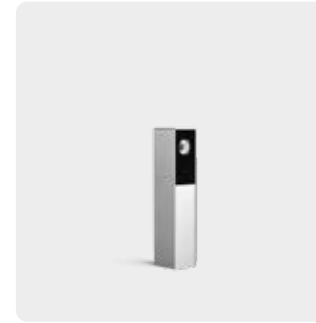

M02

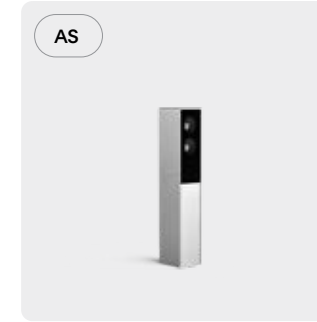


M03



M01


Emission 21° / 45° / 65° AS Asym.

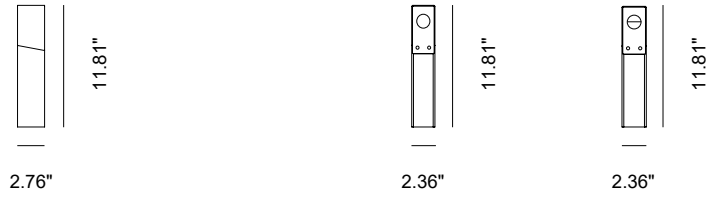

Info	Temperature	2700K (543 lm) / 3000K (550 lm) / 4000K (613 lm)
	Power	LED 5W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP66, DALI
	Accessories	F4, K3

M02


Emission 21° / 45° / 65° AS Asym.

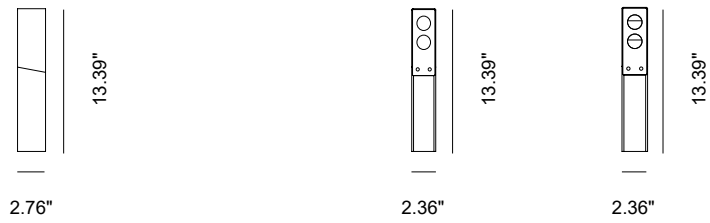

Info	Temperature	2700K (1087 lm) / 3000K (1100 lm) / 4000K (1227 lm)
	Power	LED 10W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP66, DALI
	Accessories	F4, K3


M03

Emission 21° / 45° / 65° AS Asym.

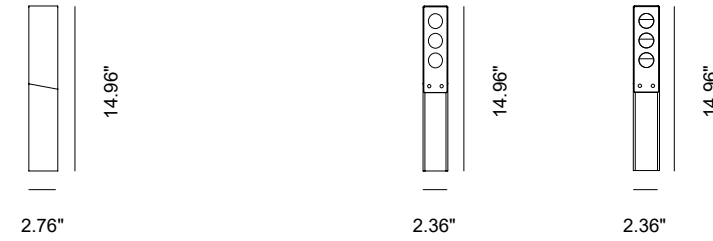

Info	Temperature	2700K (1630 lm) / 3000K (1650 lm) / 4000K (1839 lm)
	Power	LED 15W
	Finish	● INOX Natural ● INOX Graphite ● INOX Bronze
	Characteristics	IK08, IP66, DALI
	Accessories	F4, K3

Accessories F4 K3





is the USA STRAL's official dealer

79 Trenton Avenue
Frenchtown, NJ

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042