

TECHNICAL CATALOG 2024

designplan[®] 

STRAL

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

BENTH



Inox Natural



Inox Graphite



Inox Bronze

CRI>80

IP65


IK07



Stainless steel AISI 316L stem spotlight. Adjustable head and adaptable, variable stem height. Extra-clear black silk-screened tempered diffuser, 0.16 inches thick. Power cable inserted within the stem for protection against cuts and accidental damage, covered with a burnished stainless-steel spring. Equipped with 4 LEDs with 20° and 45° optics and color temperatures of 2700K, 3000K, and 4000K. Installation accessories include spike for ground insertion or baseplate installation with polyethylene counter-casing. Formwork accessory available for in-ground or concrete installation, which can be accessorized with a bottom cap and plaster guard cap. Version with baseplate for installation using anchors. Available multi-socket IP66 plug-in box made of thermoplastic material for powering up to 4 devices. Remote power supply. Surface finish HCT available in three variants.




1.18"



7.87"

1.26"




Emission



20°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm



Power
5W



45°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm

Power
5W

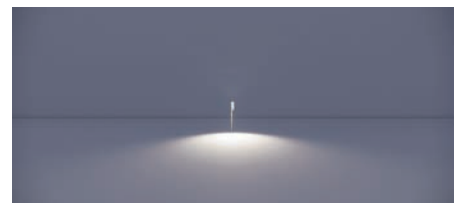

H200 - cable 3.28'


Accessories

IP65 IK07 lm Orientable



CASING FLANGE

PT68100



CASING

PT52123




MORTAR CAP

PT40002



BOTTOM CAP

H: 7.68"
PT40003





BOX ALIM 4 DISPOSITIVI 4X3W

PT41000



SPIKE

PT69001




Emission



20°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm


Power
5W



45°


Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm

Power
5W



H200 - cable 3.28'

IP65 IK07 lm Orientable

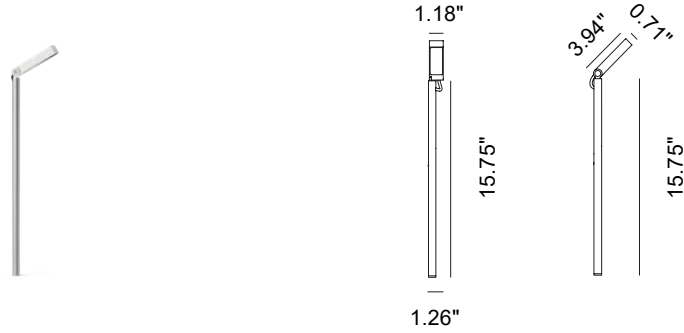

Emission





H400

20°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm

Power
5W

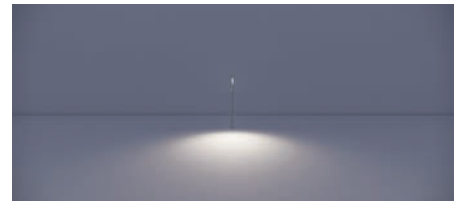


H400

45°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm


Power
5W



H400 - cable 3.28'


Accessories

IP65 IK07 lm Orientable



CASING FLANGE

PT68100



CASING

PT52123




MORTAR CAP

PT40002



BOTTOM CAP
H: 7.68"

PT40003



POWER BOX FOR
4 DEVICES 4X3W

PT41000




POWER SUPPLY
ON/OFF

PT00290



SPIKE

PT69001

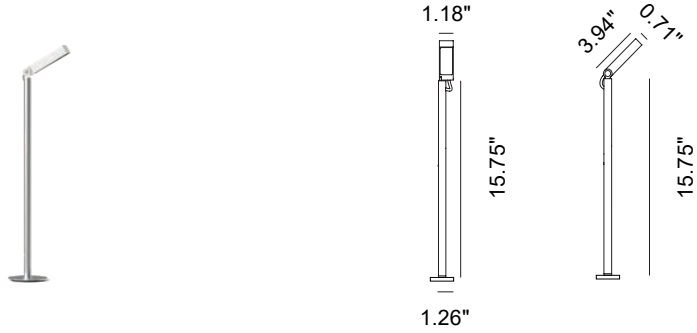



Emission



20°

Color	2700K	3000K	4000K
409 lm	433 lm	466 lm	


Power
5W

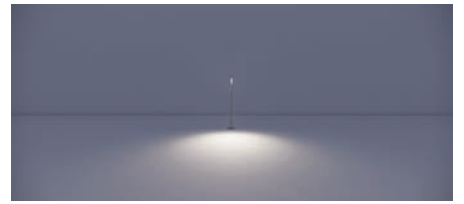

45°


Color	2700K	3000K	4000K
409 lm	433 lm	466 lm	

Power
5W



H400 - cable 3.28'

- IP65
- IK07
- lm
- Orientable

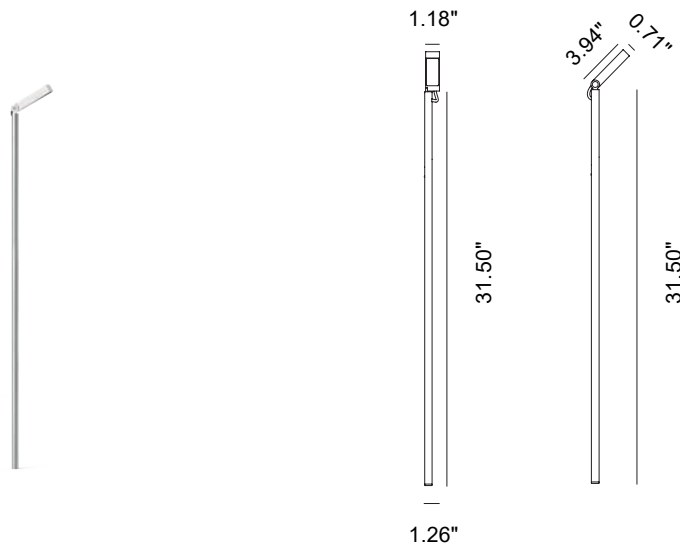

Emission





H800

20°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm

Power
5W

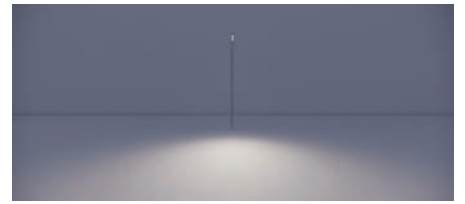


H800

45°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm


Power
5W



H800 - cable 3.28'


Accessories

IP65 IK07 lm Orientable



CASING FLANGE

PT68100



CASING

PT52123




MORTAR CAP

PT40002



BOTTOM CAP
H: 7.68"

PT40003



POWER BOX FOR
4 DEVICES 4X3W

PT41000




POWER SUPPLY
ON/OFF

PT00290



SPIKE

PT69001

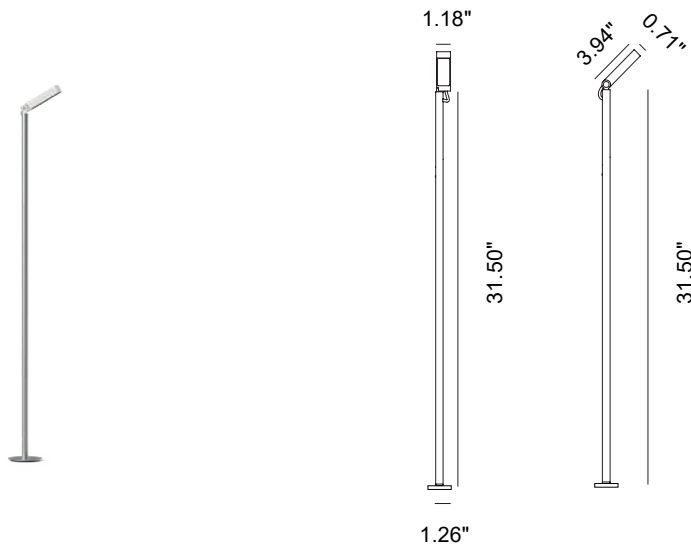


Emission



20°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm


Power
5W



45°

Color	2700K	3000K	4000K
	409 lm	433 lm	466 lm

Power
5W



H800 - cable 3.28'

- IP65
- IK07
- lm
- Orientable