

TECHNICAL CATALOGUE 2024

designplan[®] 

STRAL

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

FOCAL



Inox Natural



Inox Graphite



Inox Bronze


CRI>80

IP66


IK08



EN Stainless Steel AISI 316L projector with closure ring featuring parallel line knurling. Available in two versions: for installation with a ground spike or on an embedded formwork; alternatively, with a baseplate for floor installation in stainless steel AISI 316L. Extra-clear tempered glass, 0.16" thick. Power cable is internal-ly protected against cuts and accidental damage in all versions. Axial rotation of the head by 180°. LED version supplied with a default 6° optic and a set of inter-changeable optics: 15°, 25°, 38°, 10x35°, and wide. Spike accessory for direct ground installation. Formwork accessory for in-ground or concrete installation, which can be equipped with a bottom cap and plaster guard cap. Version with baseplate for installation using anchors. Available IP66 multi-socket plug-in box in thermoplastic material for powering up to 4 devices. Surface finish HCT available in three variants.

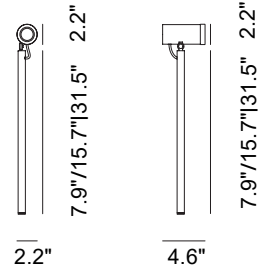

Optic multilens

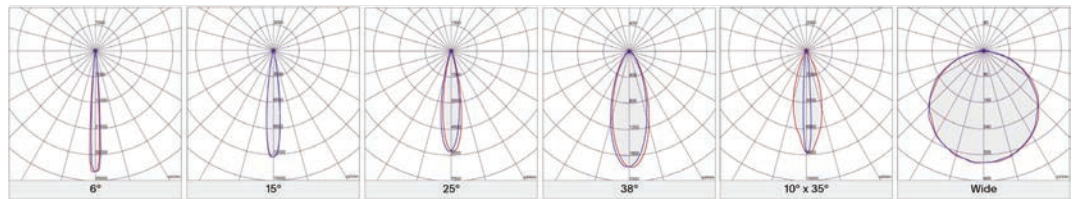


Emission



H200
Multilens

Color	2700K	3000K
	543 lm	550 lm
Power	5W	

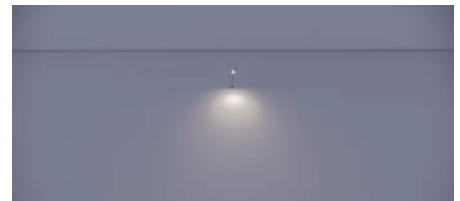

H400
Multilens

Color	2700K	3000K
	543 lm	550 lm
Power	5W	



H800
Multilens

Color	2700K	3000K
	543 lm	550 lm
Power	5W	




Possibility of attachment in various heights

GU4 Power 12V


H200 - cable 3.28'
H400 - cable 3.28'
H800 - cable 3.28'

Accessories


IP66 IK08 lm Orientable



CASING FLANGE
PT68100




CASING
PT52123



MORTAR CAP
PT40002



BOTTOM CAP
H:195
PT40003



POWER BOX FOR
4 DEVICES 4X3W
PT41000




POWER SUPPLY
ON/OFF
PT00290




SPIKE
FOCAL D-50
PT69001



POWER SUPPLY
ON/OFF
FOCAL D-50 GU4
PT00307

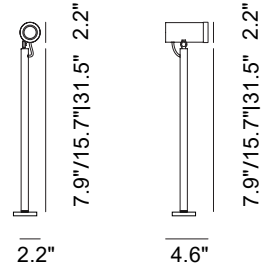

Optic multilens

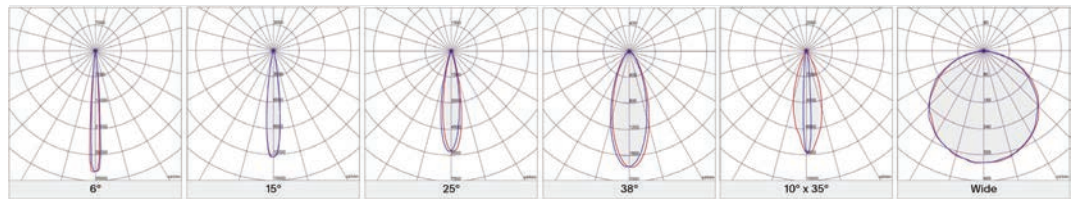

Emission



H200
Multilens

Color	
2700K	3000K
543 lm	550 lm
Power	
5W	



H400
Multilens

Color	
2700K	3000K
543 lm	550 lm
Power	
5W	



H800
Multilens

Color	
2700K	3000K
543 lm	550 lm
Power	
5W	




Possibility of attachment in various heights

GU4 Power 12V

H200 - cable 3.28'
H400 - cable 3.28'
H800 - cable 3.28'

Accessories

- IP66
- IK08
- lm
- ☞ Orientable




POWER BOX FOR
4 DEVICES 4X3W
PT41000




POWER SUPPLY
ON/OFF
PT00290



POWER SUPPLY
ON/OFF
FOCAL D-50 GU4
PT00307



Optic multilens

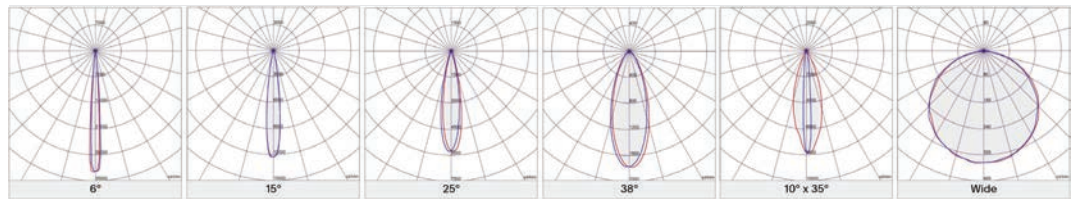


Emission




H200
Multilens

Color	2700K	3000K
	740 lm	750 lm
Power	7W	

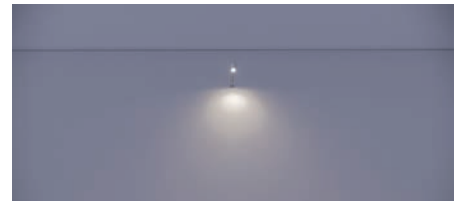


H400
Multilens

Color	2700K	3000K
	740 lm	750 lm
Power	7W	

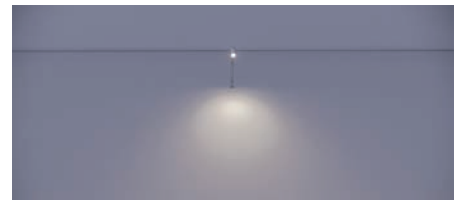

H800
Multilens

Color	2700K	3000K
	740 lm	750 lm
Power	7W	

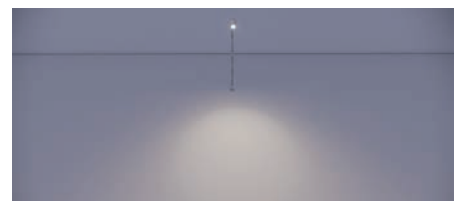


Possibility of attachment in various heights

GU10 Power xx


H200 - cable 3.28'
H400 - cable 3.28'
H800 - cable 3.28'

Accessories

IP66 IK08 lm Orientable



CASING
FLANGE
PT68101



CASING
PT52123




MORTAR CAP
PT40002




BOTTOM CAP
H:195
PT40003



SPIKE
FOCAL D-70
PT69002



Optic multilens

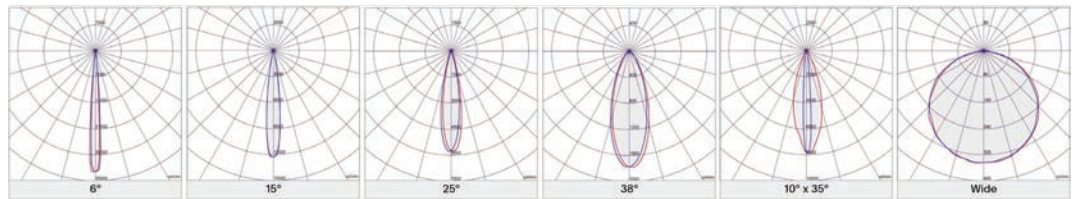

Emission



H200
Multilens

Color	
2700K	3000K
740 lm	750 lm
Power	
7W	




H400
Multilens

Color	
2700K	3000K
740 lm	750 lm
Power	
7W	



H800
Multilens

Color	
2700K	3000K
740 lm	750 lm
Power	
7W	

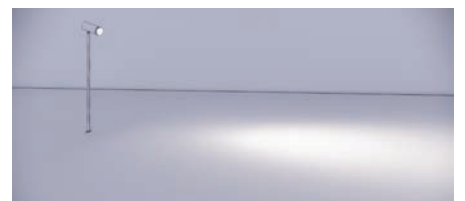

Possibility of attachment in various heights

GU10 Power xx

H200 - cable 3.28'
H400 - cable 3.28'
H800 - cable 3.28'

- IP66
- IK08
- lm
- ⤴ Orientable