



datasheet





M90



| ī | 21° |
|---|-----|
| 7 | 45° |
| 7 | 65° |

Fixture Dimensions - See page 2

TECHNICAL DATA

available for installation in concrete.

| Wattage / Input 5W (DAN M90) 7W (DAN M120) Power Supply Integral 120VAC Dimming On/Off Only Construction Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.2" Thick CCT 2700K, 3000K, 4000K CRI >80 Delivered Lumens 550 Im (M90 version - 3000K) 750 Im (M120 version - 3000K) 107 Im/W (M90 version - 3000K) Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 Impact Resistance IK08 | | | | |
|--|--------------------|--|--|--|
| Power Supply Integral 120VAC Dimming On/Off Only Construction Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.2" Thick CCT 2700K, 3000K, 4000K CRI >80 Delivered Lumens 550 Im (M90 version - 3000K) 750 Im (M120 version - 3000K) 107 Im/W (M90 version - 3000K) Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Wattage / Input | 5W (DAN M90) | | |
| Dimming On/Off Only Construction Body: AISI 316L Stainless Steel | | 7W (DAN M120) | | |
| Construction Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.2" Thick CCT 2700K, 3000K, 4000K CRI >80 Delivered Lumens 550 Im (M90 version - 3000K) 750 Im (M120 version - 3000K) 110 Im/W (M90 version - 3000K) 107 Im/W (M120 version - 3000K) 107 Im/W (M120 version - 3000K) Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Power Supply | Integral 120VAC | | |
| Lens: Black Silk-screened Extra-clear Tempered Glass 0.2" Thick CCT 2700K, 3000K, 4000K CRI >80 Delivered Lumens 550 Im (M90 version - 3000K) 750 Im (M120 version - 3000K) 110 Im/W (M90 version - 3000K) 107 Im/W (M120 version - 3000K) 107 Im/W (M120 version - 3000K) Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Dimming | On/Off Only | | |
| CRI >80 Delivered Lumens 550 Im (M90 version - 3000K) 750 Im (M120 version - 3000K) 110 Im/W (M90 version - 3000K) 107 Im/W (M120 version - 3000K) Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Construction | Lens: Black Silk-screened Extra-clear | | |
| Delivered Lumens 550 lm (M90 version - 3000K) 750 lm (M120 version - 3000K) 110 lm/W (M90 version - 3000K) 107 lm/W (M120 version - 3000K) 107 lm/W (M120 version - 3000K) 21°, 45°, 65° Eumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | CCT | 2700K, 3000K, 4000K | | |
| 750 lm (M120 version - 3000K) Efficacy | CRI | >80 | | |
| Efficacy 110 lm/W (M90 version - 3000K) 107 lm/W (M120 version - 3000K) Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Delivered Lumens | 550 lm (M90 version - 3000K) | | |
| 107 lm/W (M120 version - 3000K) Optics | | 750 lm (M120 version - 3000K) | | |
| Optics 21°, 45°, 65° BUG Rating — Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Efficacy | 110 lm/W (M90 version - 3000K) | | |
| BUG Rating | | 107 lm/W (M120 version - 3000K) | | |
| Lumen Maintenance 100,000 hrs L80, B10 (Ta 25°C) Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Optics | 21°, 45°, 65° | | |
| Hard Coat Finishes Inox Natural, Inox Graphite, Inox Bronze Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | BUG Rating | _ | | |
| Fixture Dimensions M90: 5.71" x 5.71" x 23.62" or 35.73" h M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating IP66 | Lumen Maintenance | 100,000 hrs L80, B10 (Ta 25°C) | | |
| M120: 7.01" x 7.01" x 23.62" or 35.73" h IP Rating | Hard Coat Finishes | Inox Natural, Inox Graphite, Inox Bronze | | |
| IP Rating IP66 | Fixture Dimensions | M90: 5.71" x 5.71" x 23.62" or 35.73" h | | |
| | | M120: 7.01" x 7.01" x 23.62" or 35.73" h | | |
| Impact Resistance IK08 | IP Rating | IP66 | | |
| | Impact Resistance | IK08 | | |

Dan is an IP66-rated stainlees steel bollard with clean lines and harmonious proportions that is perfectly suited for illuminating gardens and paths. It is available in 2 heights (23.6" or 35.4"), 2 different pole head diameters (3.5" or 4.7"), and 3 standard Hard Coat Treatment finishes. Flange with anchor bolts

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION

Example: SPT6021349B.US. Accessories sold separately.

| | | | | | .us |
|----------------|------------------|----------------|-------------------------|--------------------------|-----|
| Model No. | ССТ | Optics | Height | Finishes | |
| SPT6021 (M90) | 2 - 2700K | 2 - 21° | 6 - 23.6" height | N - Inox Natural | .US |
| SPT6022 (M120) | 3 - 3000K | 4 - 45° | 9 - 35.4" height | G - Inox Graphite | |
| | 4 - 4000K | 6 - 65° | | B - Inox Bronze | |
| | | | | | |

Job Name/Date: Fixture Type Designation:


P: 908-996-7710 F: 908-996-7042






datasheet

FIXTURE DIMENSIONS




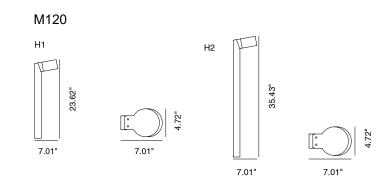

FINISHES



ACCESSORIES



PT64000Flange with 4 Anchor Bolts for DAN

Fixture Type Designation:

Job Name/Date:

P: 908-996-7710 F: 908-996-7042





datasheet

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Job Name/Date:

Fixture Type Designation: