

Focal is a IP66-rated LED floodlight with locking ring, parallel lines, and a head axial rotation of 180°, that is perfectly suited for illuminating architectural details and natural elements such as shrubs and planted areas. It is available in 2 head sizes, 3 heights, and in 3 standard Hard Coat Treatment finishes. Lamp by others.



Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	5W LED (Lamp by others)
Power Supply	Remote 12VDC Constant Voltage
Dimming	See Power Supplies on Page 2
Construction	Body: AISI 316L Stainless Steel Lens: Extra-clear Tempered Glass 0.16" Thick
CCT	MR11 (D-50) Lamp by others MR16 (D-70) Lamp by others
Delivered Lumens	Determined by Lamp
Efficacy	Determined by Lamp
Optics	Determined by Lamp
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Ø2.2" x 7.9", 15.8", 31.5" h (Focal D-50) Ø2.8" x 7.9", 15.8", 31.5" h (Focal D-70)
IP Rating	IP66
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION


Example: SPT5041034B.US. Power Supplies / Accessories sold separately.

				.US
Model No.	Height	Finishes	Fixing	
SPT501504 (D-50 - 5W LED Bulb)	2 - 7.87"	N - Inox Natural	F - On Mounting Plate	.US
SPT501701 (D-70 - 5W LED Bulb)	4 - 15.75"	G - Inox Graphite	S - On Spike (included)	
Bulb Sold Separately	8 - 31.50"	B - Inox Bronze		


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

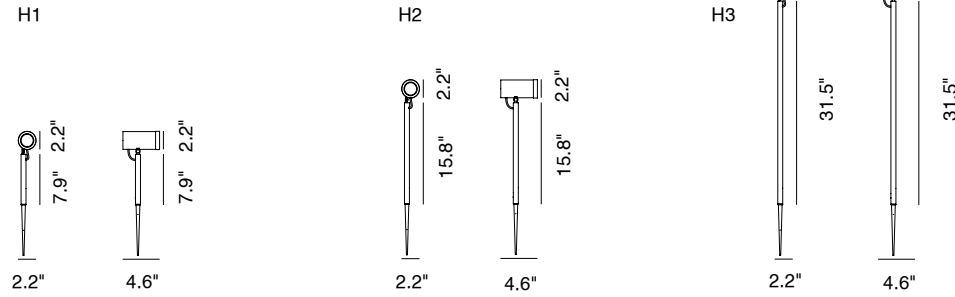

FOCAL D-50

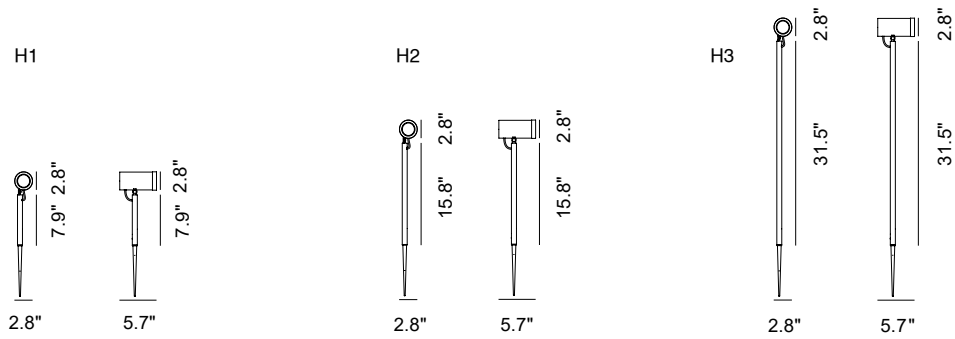

FOCAL D-70

SUGGESTED POWER SUPPLIES

12VDC

Part Number	Description	Input/Output	# of Fixtures	
			D-50	D-70
PPLT00162	Non-Dim	120VAC to 12VDC, 20W, Class 2, IP64	1-5	1-3
PPLT00654	0-10V Dimming	120-277VAC to 12VDC, 50W, Class 2	1-13	1-8

For other power supply options consult factory.

FINISHES



Job Name/Date:

Fixture Type Designation: