

Focal is a IP66-rated LED floodlight with locking ring, parallel lines, and a head axial rotation of 180°, that is perfectly suited for illuminating architectural details and natural elements such as shrubs and planted areas. It is available in 2 head sizes, 3 heights, and in 3 standard Hard Coat Treatment finishes. Lamp by others.



Fixture Dimensions - See page 2

TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 5W LED (Lamp by others) |
| Power Supply | Remote 12VDC Constant Voltage |
| Dimming | See Power Supplies on Page 2 |
| Construction | Body: AISI 316L Stainless Steel Lens: Extra-clear Tempered Glass 0.16" Thick |
| CCT | MR11 (D-50) Lamp by others MR16 (D-70) Lamp by others |
| Delivered Lumens | Determined by Lamp |
| Efficacy | Determined by Lamp |
| Optics | Determined by Lamp |
| Hard Coat Finishes | Inox Natural, Inox Graphite, Inox Bronze |
| Fixture Dimensions | Ø2.2" x 7.9", 15.8", 31.5" h (Focal D-50) Ø2.8" x 7.9", 15.8", 31.5" h (Focal D-70) |
| IP Rating | IP66 |
| Impact Resistance | IK08 |
| Warranty | 10 Years Against Corrosion 5 Years on Electrical Components |

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION


Example: **SPT5041034B.US**. Power Supplies / Accessories sold separately.

| | | | | |
|---------------------------------------|----------------------|--------------------------|--------------------------------|------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | .US |
| Model No. | Height | Finishes | Fixing | .US |
| SPT501504 (D-50 - 5W LED Bulb) | 2 - 7.87" | N - Inox Natural | F - On Mounting Plate | |
| SPT501701 (D-70 - 5W LED Bulb) | 4 - 15.75" | G - Inox Graphite | S - On Spike (included) | |
| Bulb Sold Separately | 8 - 31.50" | B - Inox Bronze | | |


Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

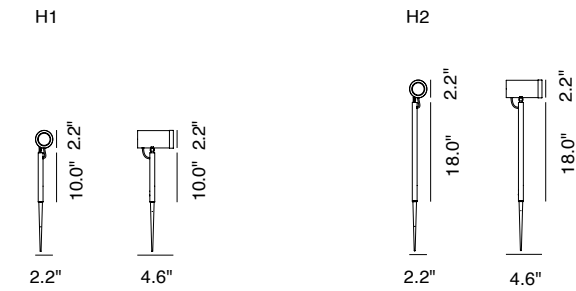

FOCAL D-50

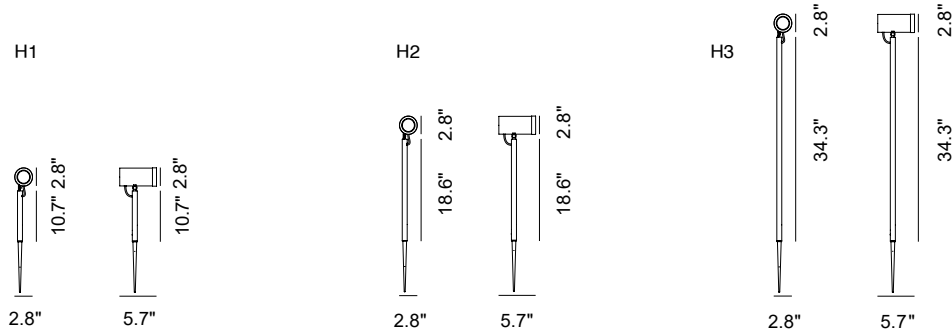

FOCAL D-70

SUGGESTED POWER SUPPLIES

12VDC

| Part Number | Description | Input/Output | # of Fixtures | |
|---------------------------|---------------|-------------------------------------|---------------|------|
| | | | D-50 | D-70 |
| PPLT00162 | Non-Dim | 120VAC to 12VDC, 20W, Class 2, IP64 | 1-5 | 1-3 |
| PPLT00654 | 0-10V Dimming | 120-277VAC to 12VDC, 50W, Class 2 | 1-13 | 1-8 |

For other power supply options consult factory.

FINISHES



Inox Natural

Inox Graphite

Inox Bronze

Job Name/Date:

Fixture Type Designation: