


Kran is an IP66-rated bollard made of stainless steel, available in versions with 1, 2, or 3 LEDs in the head, and 2 heights for each style. It is available in 3 color temperatures, 5 optics options, and 3 Hard Coat Treatment finishes.



TECHNICAL DATA

Wattage	5W (M01), 10W (M02), 15W (M03)
Power Supply	Integral 120VAC
Dimming	On/Off Only
Construction	Body: AISI 316L Stainless Steel Lens: Flush Black Silk-screened Glass Extra-clear, Tempered, 0.16" Thick
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	550 lm per beam (3000K)
Efficacy	110 lm/W per beam (3000K)
Optics	21°, 45°, 65°, Asymmetric, Road
BUG Rating	—
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	23.6" or 35.4" height M01 head: 5.71" l x 2.36" h M02 head: 7.24" l x 2.36" h M03 head: 8.78" l x 2.36" h
IP Rating	IP66
Impact Resistance	IK08

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.



Fixture Dimensions - See page 2

ORDERING INFORMATION


Example: SPT6012366B.US. Accessories sold separately.

					.US
Model No.	CCT	Optics	Height	Finishes	
SPT6011 (M01)	2 - 2700K	2 - 21°	6 - 23.6"	N - Inox Natural	.US
SPT6012 (M02)	3 - 3000K	4 - 45°	9 - 35.4"	G - Inox Graphite	
SPT6013 (M03)	4 - 4000K	6 - 65°		B - Inox Bronze	
		7 - Asymmetrical			
		8 - Road			

Job Name/Date:

Fixture Type Designation:



FIXTURE DIMENSIONS

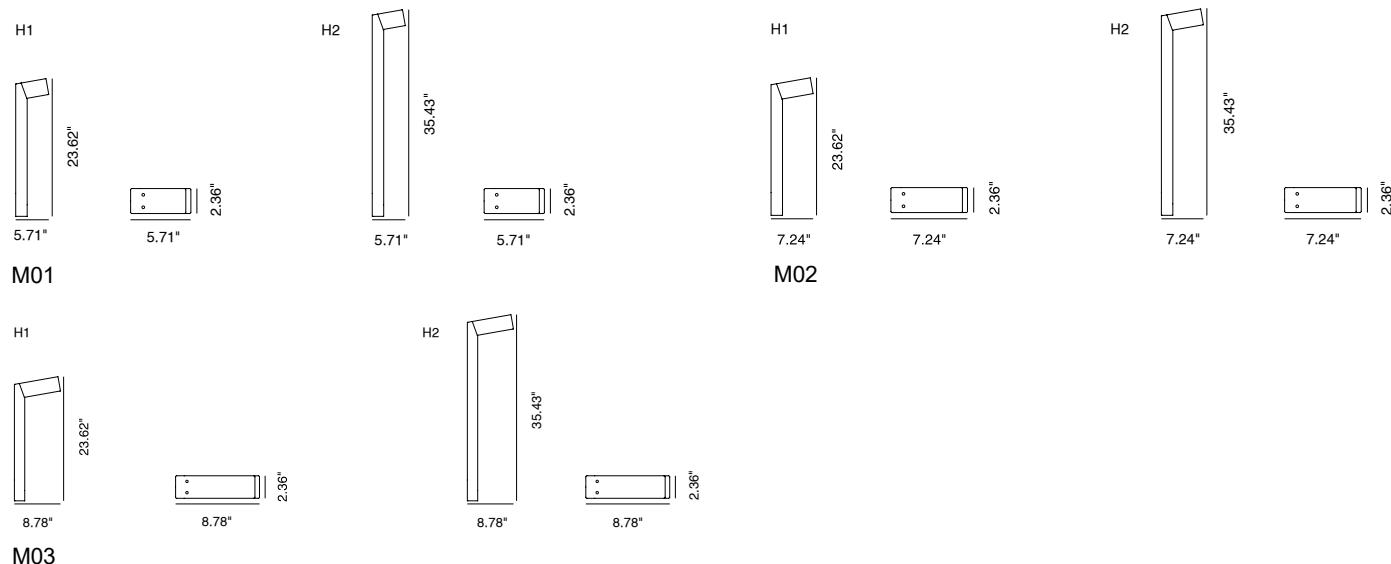

FINISHES



ACCESSORIES



1.97"

PT64000

Flange with 4 Anchor Bolts
for KRAN
(REQUIRED)

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: