


SOLISIA WALL 200 is a round, wall mounted LED luminaire made of Accoya®, a sustainable, highly durable wood treated with Acetylation treatment. It is available with 12W, 3000K and diffuse optics. 25 year warranty on Accoya® Wood - 5 year warranty on lighting element.



TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage | 12W |
| Power Supply | Remote 24VDC, not included. See page 2. |
| Construction | Body: Accoya® Wood and Inox AISI 316L Lens: Opal Polycarbonate |
| CCT | 2700K, 3000K |
| CRI | >90 |
| Delivered Lumens | 1098 lm (3000K) |
| Efficacy | 91.5 lm/W |
| Optics | Diffuse |
| Finishes | Accoya® - Acetylation treatment |
| Fixture Dimensions | Ø7.87" x 1.18" h |
| Lumen Maintenance | L70 >50,000hrs (Ta 40°C) |
| Color Consistency | 3-Step MacAdam |
| IP Rating | IP65 |
| Impact Resistance | IK08 |

Fixture Dimensions



ORDERING INFORMATION

Example: LNSO80PARDHB7Z3.US. Accessories / Power Supplies ordered separately.

| | | | | | |
|------------------|-------------|---------------|------------------------|---------------|----|
| LNSO | 80PAR | D | | B7Z3 | US |
| Model No. | Size | Optics | CCT | Power | |
| LNSO | 80PAR | D - Diffuse | Y - 2700K H - 3000K | B7Z3 - Remote | US |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|---|------------------------------------|---------------|
| PPLT00284 | Non-Dim | 120-277VAC to 24VDC, 100W, Class 2 | 1-6 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-6 |

Suggested Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|--------|------------|-----------|--|-----------------------------------|---------------|
| PPLT00530 | L3D0 | L3D0 | 100%-0.1% | Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-6 |

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|-------------------------------------|---|---------------|
| PPLT00715 | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-6 |


For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation
(included)**Single Connection IP68****PHOTOMETRIC DATA***Note: All photometric data is 3000K*

Maximum Candela = 352.2

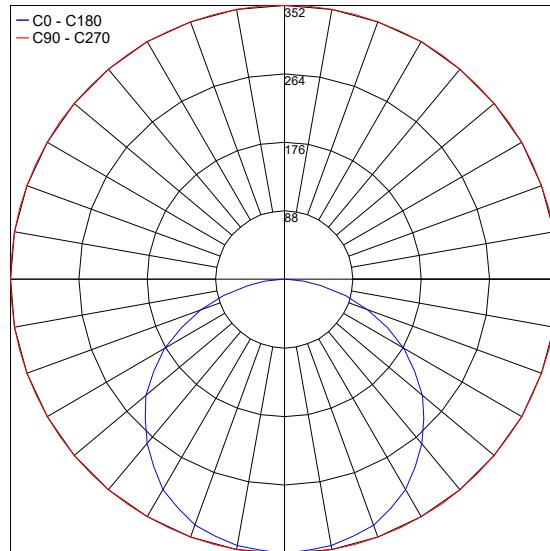

PHOTOMETRIC FILENAME : SOLISIA_SO80XXXDHB7Z3.IES

Job Name/Date:

Fixture Type Designation: