

solisia

design by Landa R&D



ECOLOGICAL PASTORAL.



solisia

With Solisia, [LND] has created an evocative and elegant range of products developed in two applications, bollard and wall-mounted, which dialogue in continuity with the outdoor environment.

The circle, the perfect paradigm of union, is the shape which makes the lighting device stand out. Light emission is diffused with the following available powers: 10/20W (bollard) and 8/13W (wall-mounted) and with an ecological Accoya® style. Solisia respects the outdoor environment in which it is installed.



solisia 130

WALL LAMP



Wattage	8W
Voltage	24VDC
Beam	

TECHNICAL SPECIFICATIONS

Source lamp	LED 8W
Total wattage	8W
Voltage	24VDC
Control	On/Off
Light color	3000K • other colors on request
Luminous flux(*Source flux)	470 lm (920 lm*)
Luminous efficacy	59 lm/W
McADAM steps	3
Beam	Diffuse (indirect)
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

MATERIALS



Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

S070PARDH B7Z3

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68

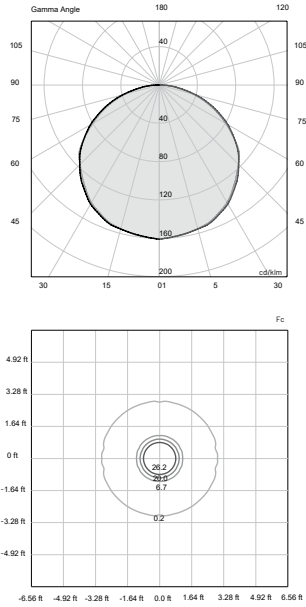



solisia 130


BOLLARD



Wattage	10W
Voltage	24VDC
Beam	

TECHNICAL SPECIFICATIONS

Source lamp	LED 8W
Total wattage	10W
Voltage	24VDC, 50-60 Hz
Control	On/Off
Light color	3000K • other colors on request
Luminous flux (*Source flux)	470 lm (920 lm*)
Luminous efficacy	47 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

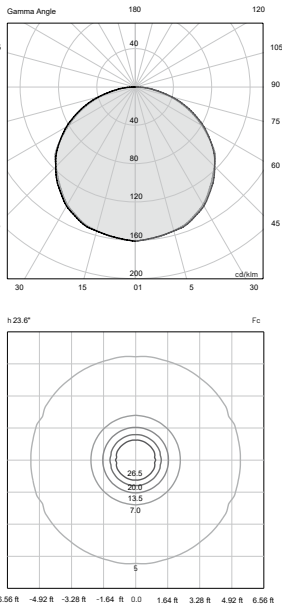

MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

S070	_____	DH B103	
	_____	Height	035 13.78"
			055 21.65"
			085 33.46"
		Example	S070 035 DH B103

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68
-	Root mounting kit



solisia 200

WALL LAMP



Wattage	13W
Voltage	24VDC
Beam	

TECHNICAL SPECIFICATIONS

Source lamp	LED 12W
Total wattage	12W
Voltage	24VDC
Control	On/Off
Light colour	3000K • other colors on request
Luminous flux (*Source flux)	1098 lm (1831 lm*)
Luminous efficacy	84 lm/W
McADAM steps	3
Beam	Diffuse (indirect)
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

DIFFUSE
LED 12W
12W
24VDC
On/Off
3000K • other colors on request
1098 lm (1831 lm*)
84 lm/W
3
Diffuse (indirect)
> 90
L70 > 50.000 h Ta 40°C
IP65
IK08

MATERIALS



Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

S080PARDH87Z3

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68

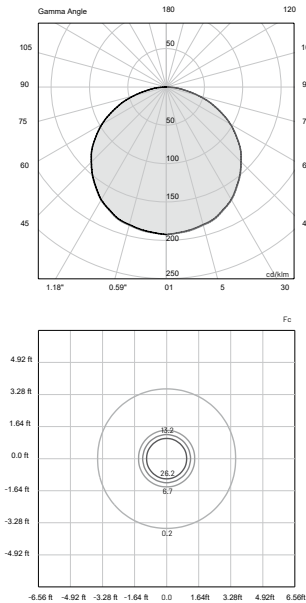

solisia 200


BOLLARD



Wattage	20W
Voltage	24VDC
Beam	

TECHNICAL SPECIFICATIONS

Source lamp	LED 13W
Total wattage	20W
Voltage	24VDC, 50-60 Hz
Control	On/Off
Light color	3000K • other colors on request
Luminous flux(*Source flux)	1098 lm (1831 lm*)
Luminous efficacy	55 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

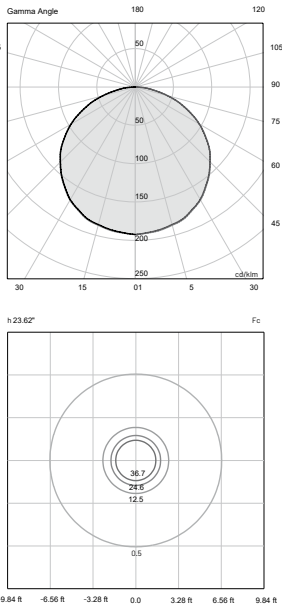

MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

ORDER CODE

S080	DHB103		
		Height	035 13.78"
			055 21.65"
			085 33.46"
		Example	S080035DHB103

INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68
-	Root mounting kit

