


Volk is an IP66-rated bollard with a slanted head with 3 LEDs and a height of 19.7" that is perfect for illuminating any outdoor space with high quality light. It is made of stainless steel, and is available in 3 color temperatures, with a 65° optic, and 3 Hard Coat Treatment finishes. Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage</b>	15W
<b>Power Supply</b>	Integral 120VAC
<b>Dimming</b>	On/Off Only
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: 0.16" Silk-screened, Extra-clear Tempered Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	1650 lm (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	110 lm/W (3000K)
<b>Optics</b>	65°
<b>BUG Rating</b>	B1-U1-G0
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	6.3" x 20.5" h
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components

Fixture Dimensions

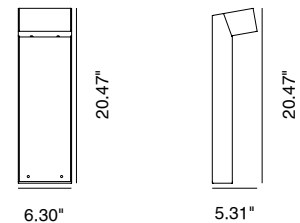

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT6033605G.US. Accessories sold separately.

SPT603		6	05		.US
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Height</b>	<b>Finishes</b>	
SPT603	2 - 2700K 3 - 3000K 4 - 4000K	6 - 65°	05 - 20" (50 cm)	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

## FINISHES




Inox Natural



Inox Graphite

Inox Bronze


## ACCESSORIES



**PT65000**  
Flange Kit with  
4 Anchor Bolts  
9.06" w x 10.63" h  
**(REQUIRED)**




**PT65010**  
Anchor Flange  
8.27" w x 3.15" h  
**(REQUIRED)**




## PHOTOMETRIC DATA

Maximum Candela = 1142.6

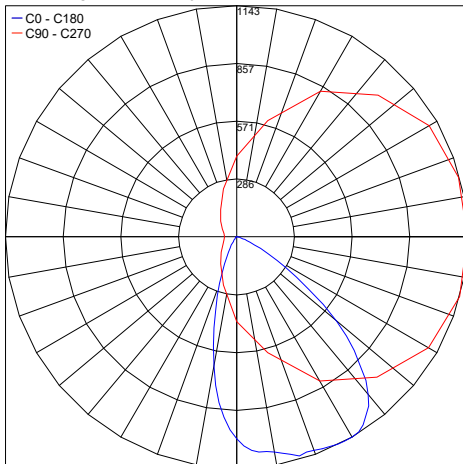


PHOTOMETRIC FILENAME : VOLK 15W 2700K 19.7IN - PT6032605N.IES

Maximum Candela = 1165.0

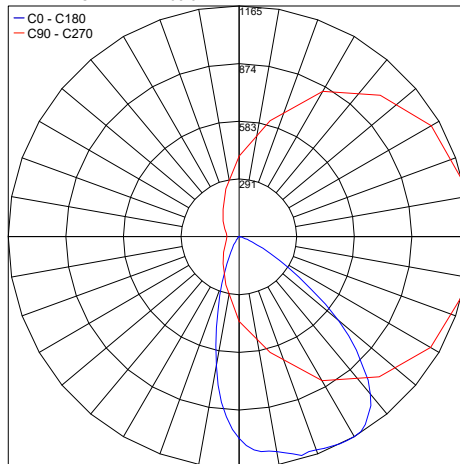

PHOTOMETRIC FILENAME : VOLK 15W 3000K 19.7IN - PT6033605N.IES

Maximum Candela = 1288.2

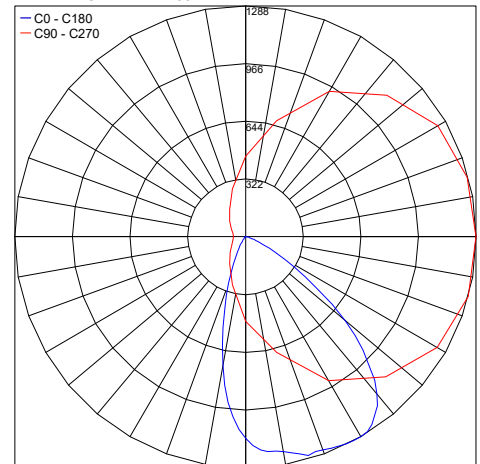

PHOTOMETRIC FILENAME : VOLK 15W 4000K 19.7IN - PT6034605N.IES

Job Name/Date:

Fixture Type Designation: