

CAUSEWAY M-02


Causeway is a stainless steel, IP66-rated, square bollard inspired by the basalt columns of the Giant's Causeway in Ireland, tavailable in 3 heights with a pole top available with 1, 2, or 3 LEDs with frontal emission. Causeway M-02 is the double LED version, available in 3 color temperatures, 4 optics, and 3 Hard Coated Treatment finishes. Available flange with anchor bolts for installation in concrete.



TECHNICAL DATA

Wattage	10W (M02)
Power Supply	Integral 120VAC
Construction	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
CCT	2700K, 3000K, 4000K
CRI	>85
BUG Rating	B0-U3-G3 (21°, 3000K) B0-U3-G2 (45°, 65°, 3000K) B1-U1-G0 (Asym)
Delivered Lumens	825 lm (M02 - 3000K, 45°)
Efficacy	110 lm/W (3000K)
Optics	21°, 45°, 65°, Asymmetrical
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	2.36" x 2.76" x 13.39"
IP Rating	IP66
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Fixture Dimensions

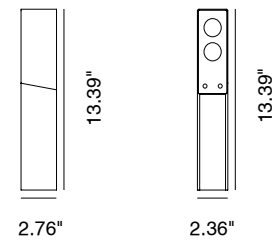

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION

Example: SPT6042034G.US. Accessories sold separately.

SPT604	20				.US
Model No.	Height	CCT	Optics	Finishes	
SPT604	20 - 13.39" (double)	2 - 2700K 3 - 3000K 4 - 4000K	2 - 20° 4 - 45° 6 - 65° 7 - Asymmetrical	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural




Inox Graphite




Inox Bronze

ACCESSORIES



PT66000
Flange with 4 anchor bolts
for CAUSEWAY
(REQUIRED)




2.36"

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 3953.4

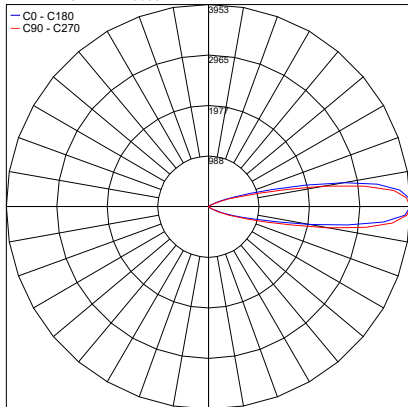


PHOTOMETRIC FILENAME : CAUSEWAY M-02 - 10W 30K 21° - PT6042032N.IES

Maximum Candela = 1337.0

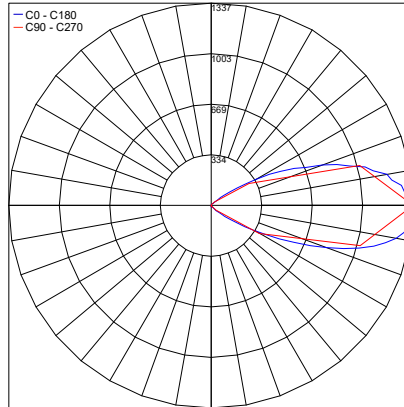


PHOTOMETRIC FILENAME : CAUSEWAY M-02 - 10W 30K 45° - PT6042034N.IES

Maximum Candela = 770.1

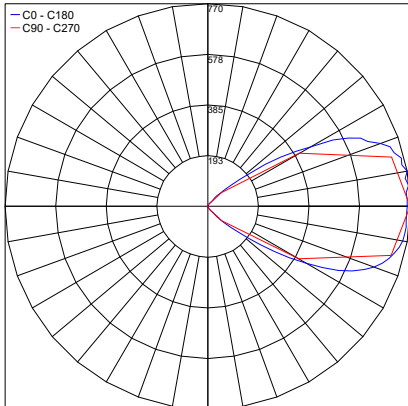

PHOTOMETRIC FILENAME : CAUSEWAY M-02 - 10W 30K 65° - PT6042036N.IES

Maximum Candela = 911.3

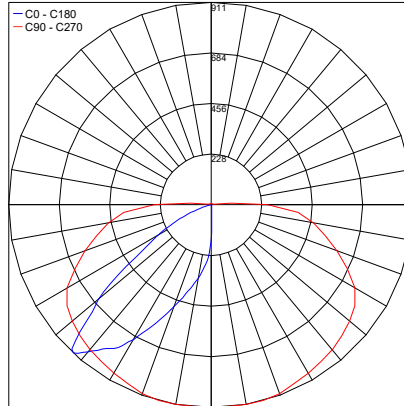

PHOTOMETRIC FILENAME : CAUSEWAY M-02 - 10W 30K ASYM - PT6042037N.IES

Job Name/Date:

Fixture Type Designation: