

# TECHNICAL CATALOG 2024

designplan<sup>®</sup> 

**STRAL**

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

# HOKU



Inox Natural



Inox Graphite



Inox Bronze


CRI&gt;80

IP66


IK08



Closure ring with parallel line knurling. Projector and housing base in stainless steel AISI 316L. Extra-clear tempered glass, 0.16 inches thick. Projector rotates within the base by 360°. LED version comes with a default 6° optic and a set of interchangeable optics: 15°, 25°, 38°, 10x35°, and wide. Remote power supply for the D-50 LED version, integrated power supply for the D-70 LED version. GU4 socket for the D-50 version with remote power supply and GU10 for the D-70 version. Surface finish HCT available in three variants. Installable on the floor, wall, and ceiling using a dedicated bracket.




4.72"



4.72"

Optic multilens

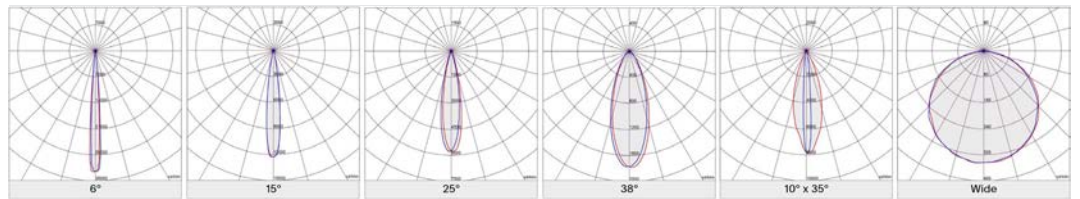


Emission




GROUND  
Multilens

Color	2700K	3000K	4000K
	543 lm	550 lm	613 lm
Power	5W		



WALL  
Multilens

Color	2700K	3000K	4000K
	543 lm	550 lm	613 lm
Power	5W		



CEILING  
Multilens


Color	2700K	3000K	4000K
	543 lm	550 lm	613 lm
Power	5W		



Possibility of attachment in various heights

GU4                      Power 12V

- IP66
- IK08
- lm
- ↻ Orientable



5.12"


4.72"



4.72"

4.72"

Optic multilens

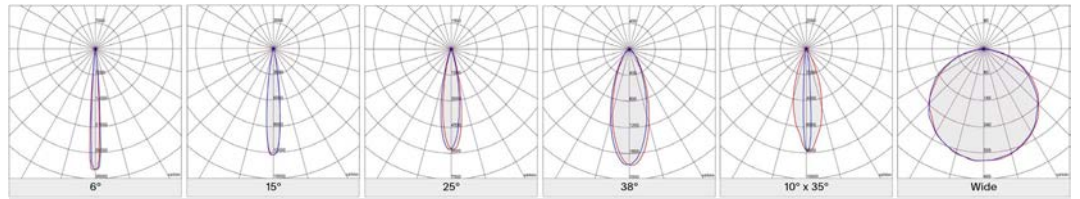

Emission



GROUND  
Multilens

Color		
2700K	3000K	4000K
740 lm	750 lm	836 lm

Power  
7W



WALL  
Multilens

Color		
2700K	3000K	4000K
740 lm	750 lm	836 lm

Power  
7W



CEILING  
Multilens

Color		
2700K	3000K	4000K
740 lm	750 lm	836 lm

Power  
7W



Possibility of attachment in various heights

GU10

Power 120V

IP66 IK08 lm Orientable