

# TECHNICAL CATALOG 2024

designplan<sup>®</sup> 

**STRAL**

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

# KHORI



Inox Natural



Inox Graphite



Inox Bronze

CRI>80

IP66

IK07



Bollard available in four heights: 0.98-, 1.64-, 2.30-, and 2.95-feet, made of AISI 316L stainless steel. The bollard body is available in diameters of 1.57- and 2.76-inches. LED color temperatures of 2700K, 3000K, and 4000K. Polycarbonate diffuser with an integrated roto-symmetric diffusing optic. Available with two installation types: kit with anchor bolts for concrete installation, or alternatively, a plate for fixing with anchors. Integrated power supply. Surface finish HCT available in three versions.




11.81" | 19.69" | 27.56" | 35.43"

2.76" | 2.76"

1.57"


Emission



Roto H30

Color	2700K	3000K	4000K
	988 lm	1040 lm	1092 lm


Power  
7W



Roto H50

Color	2700K	3000K	4000K
	988 lm	1040 lm	1092 lm


Power  
7W



Roto H70

Color	2700K	3000K	4000K
	988 lm	1040 lm	1092 lm


Power  
7W



Roto H90


Color	2700K	3000K	4000K
	988 lm	1040 lm	1092 lm

Power  
7W




Accessories

IP66 IK07 lm



ANCHOR FLANGE  
PT68010 N/B/G




ANCHOR BOLTS  
KIT  
PT68000




1.57"

11.81" | 19.69" | 27.56" | 35.43"



2.76"


Emission



Roto H30

Color	2700K	3000K	4000K
988 lm	1040 lm	1092 lm	



Power  
7W



Roto H50

Color	2700K	3000K	4000K
988 lm	1040 lm	1092 lm	


Power  
7W

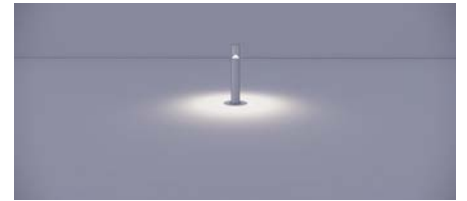

Roto H70

Color	2700K	3000K	4000K
988 lm	1040 lm	1092 lm	


Power  
7W



Roto H90


Color	2700K	3000K	4000K
988 lm	1040 lm	1092 lm	

Power  
7W




Accessories

IP66 IK07 lm



ANCHOR FLANGE  
PT68010 N/B/G



ANCHOR BOLTS  
KIT  
PT68000