



datasheet







21°
45°

Fixture Dimensions - See page 2

TECHNICAL DATA

available for installation in concrete.

5W (DAN M90)		
7W (DAN M120)		
Integral 120VAC		
On/Off Only		
Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.2" Thick		
2700K, 3000K, 4000K		
>80		
550 lm (M90 version - 3000K)		
750 lm (M120 version - 3000K)		
110 lm/W (M90 version - 3000K)		
107 lm/W (M120 version - 3000K)		
21°, 45°, 65°		
_		
100,000 hrs L80, B10 (Ta 25°C)		
Inox Natural, Inox Graphite, Inox Bronze		
M90: 5.71" x 5.71" x 23.62" or 35.73" h		
M120: 7.01" x 7.01" x 23.62" or 35.73" h		
IP66		
IK08		

Dan is an IP66-rated stainlees steel bollard with clean lines and harmonious proportions that is perfectly suited for illuminating gardens and paths. It is available in 2 heights (23.6" or 35.4"), 2 different pole head diameters (3.5" or 4.7"), and 3 standard Hard Coat Treatment finishes. Flange with anchor bolts

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION

Example: SPT6021349B.US. Accessories sold separately.

					.us
Model No.	ССТ	Optics	Height	Finishes	
SPT6021 (M90)	2 - 2700K	2 - 21°	6 - 23.6" height	N - Inox Natural	.US
SPT6022 (M120)	3 - 3000K	4 - 45°	9 - 35.4" height	G - Inox Graphite	
	4 - 4000K	6 - 65°		B - Inox Bronze	

Job Name/Date: Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042


of 3






datasheet

FIXTURE DIMENSIONS




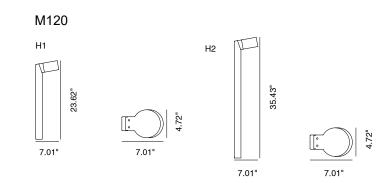

FINISHES



ACCESSORIES



PT64000 Flange with 4 Anchor Bolts for DAN (REQUIRED)

Job Name/Date: Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042





datasheet

PHOTOMETRIC DATA

Note: All photometric data is 3000K

Job Name/Date:

Fixture Type Designation:

P: 908-996-7710 F: 908-996-7042

3 of 3