

EYE 1 130 is an outdoor ceiling lamp that comes in recessed, surface-mounted, or floodlight versions. It offers high luminous efficiency and perfect beam control with 5 optics options: spot, medium, flood, elliptical and grazing.



SURFACE MOUNTED



PROJECTOR / FLOODLIGHT



RECESSED

Fixture Dimensions and Installation Options - see page 2

TECHNICAL DATA

Wattage	5.5W
Power Supply	Integral 120-277VAC
Dimming	On/Off (0-10V on request)
Construction	Body: Extruded Aluminum Lens: Extra Clear Glass Diffuser
CCT	3000K (2200K, 2700K, RGBW on request)
CRI	>90
Delivered Lumens	610 lm (12°) 589 lm (30°) 490 lm (45°) 592 lm (25° x 60°) 515 lm (25° x 60° β10°)
Efficacy	110.9 lm/W (12°) 107.1 lm/W (30°) 89.1 lm/W (45°) 107.6 lm/W (25° x 60°) 93.6 lm/W (25° x 60° β10°)
Optics	12°, 30°, 45°, 25°x60°, 25°x60° β10°
Finishes	5 Standard, See Below
Fixture Dimensions	5.1" l x 3.0" h x 1.9" w (surface mount version) 5.7" l x 4.3" h x 1.9" w (floodlight version) 5.3" l x 3.7" h x 4.3" w (recessed version)
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10

ORDERING INFORMATION


Example: LNEYL1POSFHBBZU.US. Accessories ordered separately.

LNEYL1			HBBZ		US
Model #	Size	Optics	Power	Finish	
LNEYL1	POS - Surface Mount PR1 - Projector ISO - Recessed	S - 12° Spot M - 30° Medium F - 45° Flood E - 25° x 60° Elliptical G - 25° x 60° β10° Grazing	HBBZ - Integral	G - Black H - Gray L - Graphite V - Oxide U - White	US
				<i>Recessed version only available in white finish</i>	



Job Name/Date:

Fixture Type Designation:



FIXTURE DIMENSIONS







Ceiling version



Projector version

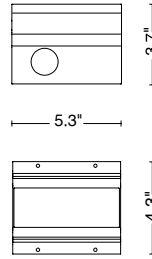

Recessed version



ACCESSORIES - Included

Ceiling Version

1.6' (0.5 m) length cable -05RN-F
Single connection IP68

Projector Version

3.28' (1 m) length cable -05RN-F
Single connection IP68
Fixing kit short (3.0")

OPTIONAL

Visor

Recessed Version

1.6 ft (0.5 m) length cable -05RN-F
Single connection IP68

OPTIONAL

00CCL1.STD - Housing box


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometric data is 3000K

12°

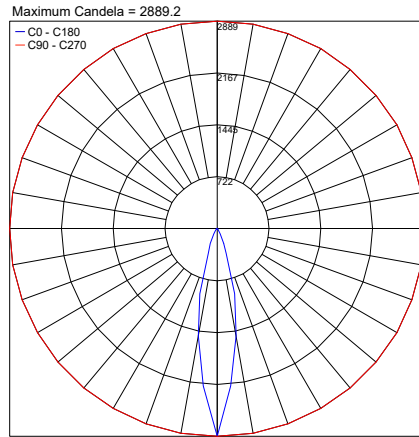


PHOTOMETRIC FILENAME : EYE-1 130 12° - EYL1XXXSHB10X.IES

30°

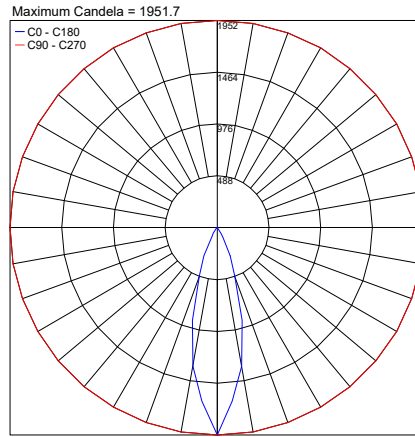


PHOTOMETRIC FILENAME : EYE-1 130 30° - EYL1XXXMHB10X.IES

45°

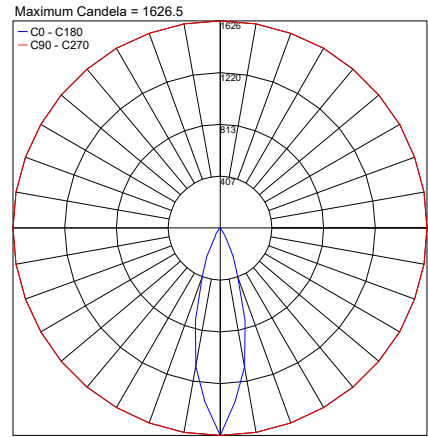


PHOTOMETRIC FILENAME : EYE-1 130 45° - EYL1XXXFHB10X.IES

25°x60°

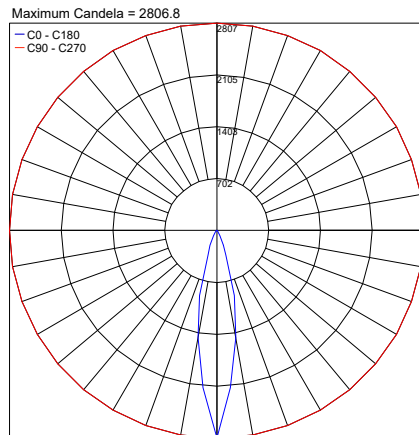

PHOTOMETRIC FILENAME : EYE-1 130 25°x60° - EYL1XXXGHB10X.IES

25°x60° B10°

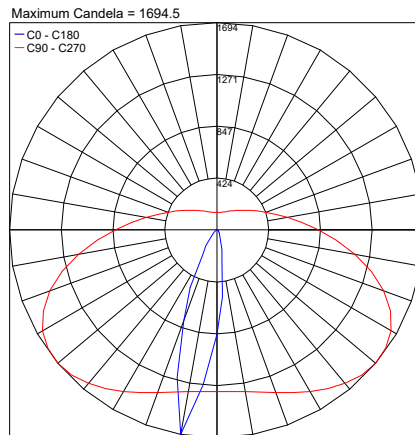

PHOTOMETRIC FILENAME : EYE-1 130 25° X 60° B10° - EYL1XXXGHB10X.IES

Job Name/Date:

Fixture Type Designation: