

eye_1 130



CEILING LAMP



Wattage 5.5 W

Voltage 120-277VAC




PROJECTOR



Wattage 5.5 W

Voltage 120-277VAC




TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 5.5W</u>
Total wattage	<u>8W</u>
Voltage	<u>120-277VAC, 50-60Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light color	<u>3000K (other colors on request**)</u>
Luminous flux	<u>610 lm (715 lm***)</u>
Luminous efficacy	<u>76 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>12°</u>
CRI	<u>> 90</u>
Life time	<u>L80-B15 > 60.000 h Ta 40°C</u>
IP rating	<u>IP67</u>
IK rating	<u>IK10</u>


SPOT

- * **Control available on request**
DALI - 0/10V - DMX - TRIAC
- ** **Light color available on request**
2200K • 2700K • RGBW
- *** Source flux

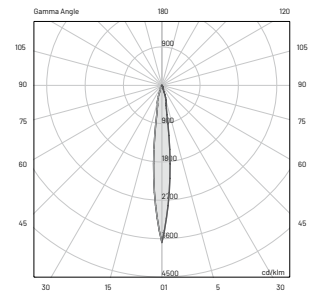

E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	268.4	1.21'
6.56'	67.1	2.46'
9.84'	29.8	3.67'
13.12'	16.8	4.89'
16.40'	10.8	6.10'

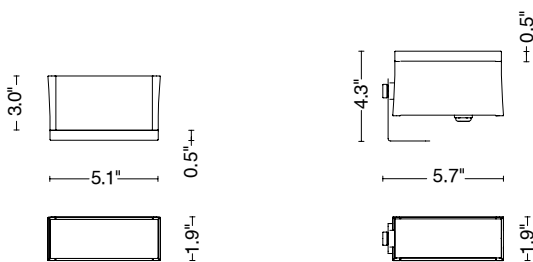

MEDIUM

LED 5.5W

8W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

589 lm (715 lm***)

74 lm/W

3

30°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

FLOOD

LED 5.5W

8W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

490 lm (715 lm***)

61 lm/W

3

45°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

ELLIPTIC

LED 5.5W

8W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

592 lm (715 lm***)

74 lm/W

3

25° x 60°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

GRAZING

LED 5.5W

8W

120VAC, 50-60Hz

On/Off (other controls on request*)

3000 K (other colors on request**)

515 lm (715 lm***)

64 lm/W

3





25° x 60° B10°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

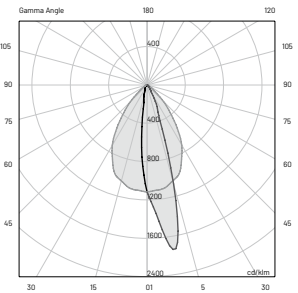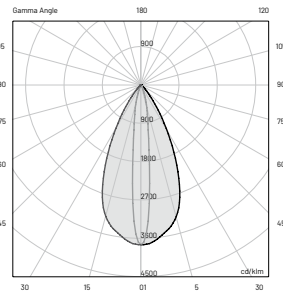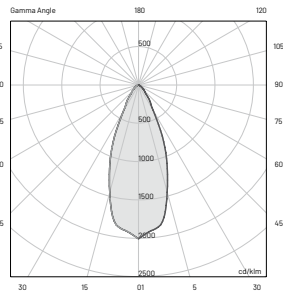
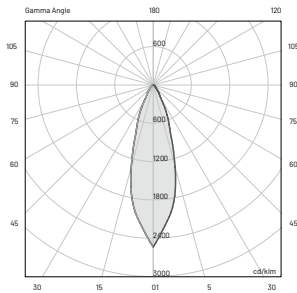


E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	181.3	1.67'
6.56'	45.3	3.48'
9.84'	20.2	5.09'
13.12'	11.3	6.66'
16.40'	7.2	8.30'

E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	151.1	1.67'
6.56'	37.8	3.44'
9.84'	16.8	5.33'
13.12'	9.5	6.73'
16.40'	6.0	8.30'

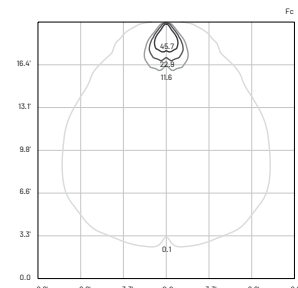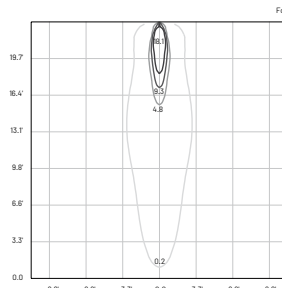

eye_1 130

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear glass
Finishing	Polyester powder paint

ORDER CODE

LNEY L1	HB 10																	
		Finishing	<table><tr><td>G</td><td>Black</td><td>●</td></tr><tr><td>H</td><td>Grey</td><td>●</td></tr><tr><td>L</td><td>Graphite</td><td>●</td></tr><tr><td>U</td><td>White</td><td>○</td></tr><tr><td>V</td><td>Oxide</td><td>●</td></tr></table>	G	Black	●	H	Grey	●	L	Graphite	●	U	White	○	V	Oxide	●
G	Black	●																
H	Grey	●																
L	Graphite	●																
U	White	○																
V	Oxide	●																
		Beam	<table><tr><td>S</td><td>Spot</td></tr><tr><td>M</td><td>Medium</td></tr><tr><td>F</td><td>Flood</td></tr><tr><td>E</td><td>Elliptic</td></tr><tr><td>G</td><td>Grazing</td></tr></table>	S	Spot	M	Medium	F	Flood	E	Elliptic	G	Grazing					
S	Spot																	
M	Medium																	
F	Flood																	
E	Elliptic																	
G	Grazing																	
		Mounting	<table><tr><td>POS</td><td>Ceiling lamp</td></tr><tr><td>PR1</td><td>Projector</td></tr></table>	POS	Ceiling lamp	PR1	Projector											
POS	Ceiling lamp																	
PR1	Projector																	
		Example	<u>LNEY L1 POS S HB 10 L</u>															

INCLUDED ACCESSORIES

CEILING LAMP

Code	Description
-	1.6' length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	1 m (3.28') length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (3.0')

AVAILABLE ACCESSORIES

PROJECTOR

Code	Description
-	Visor

eye_1 130

CEILING RECESSED



Wattage 5.5W

Voltage 120-277VAC





TECHNICAL SPECIFICATIONS

Source lamp	LED 5.5W
Total wattage	8W
Voltage	120-277VAC, 50-60Hz
Control	On/Off (other controls on request*)
Light color	3000K (other colors on request**)
Luminous flux	610 lm (715 lm***)
Luminous efficacy	76 lm/W
McADAM steps	3
Beam	12°
CRI	> 90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10


* Control available on request
DALI 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux



5.3"




4.3"


E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	268.4	1.21'
6.56'	67.1	2.46'
9.84'	29.8	3.67'
13.12'	16.8	4.89'
16.40'	10.8	6.10'


recessed installation



flush installation



protruding installation



MEDIUM

LED 5.5W

8 W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

589 lm (715 lm***)

74 lm/W

3

30°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

FLOOD

LED 5.5W

8 W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

490 lm (715 lm***)

61 lm/W

3

45°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

ELLIPTIC

LED 5.5W

8 W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

592 lm (715 lm***)

74 lm/W

3

25° x 60°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

GRAZING

LED 5.5W

8 W

120VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

515 lm (715 lm***)

64 lm/W

3





25° x 60° B10°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK 0

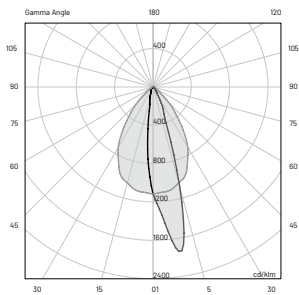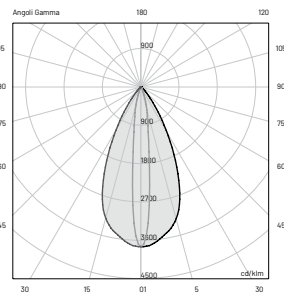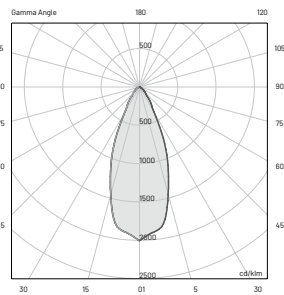
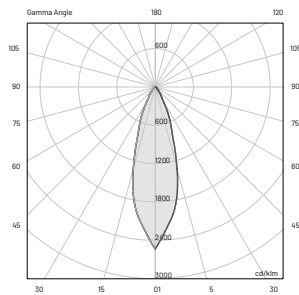


E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	181.3	1.67'
6.56'	45.3	3.48'
9.84'	20.2	5.09'
13.12'	11.3	6.66'
16.40'	7.2	8.30'

E (LUX)

H (ft)	fc (3000K)	Ø (ft)
3.28'	151.1	1.67'
6.56'	37.8	3.44'
9.84'	16.8	5.09'
13.12'	9.5	6.73'
16.40'	6.0	8.30'

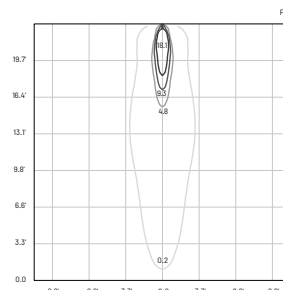


eye_1 130

MATERIALS

<i>Body</i>	<u>Extruded aluminum EN AW6060</u>
<i>Diffuser</i>	<u>Extra clear glass</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

ORDER CODE

LNEY L1ISO_H B10U

 <i>Beam</i>	<u>S Spot</u>
	<u>M Medium</u>
	<u>F Flood</u>
	<u>E Elliptic</u>
	<u>G Grazing</u>

Example LNEY L1ISO**S**H B10U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>-</u>	<u>1.6 ft (0.5 m) length cable -05RN-F</u>
<u>-</u>	<u>Single connection IP68</u>

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>00CCL1.STD</u>	<u>Housing box</u>