

EYE 1 300

EYE 1 300 is a linear outdoor ceiling lamp that comes in recessed, surface-mounted, or projector versions. It offers high luminous efficiency and perfect beam control with 5 optics options: spot, medium, flood, elliptical and grazing.



SURFACE MOUNTED



PROJECTOR / FLOODLIGHT



RECESSED

Fixture Dimensions and Installation Options - see page 2

TECHNICAL DATA

Wattage	24W
Power Supply	Integral 120-277VAC
Dimming	On/Off (0-10V on request)
Construction	Body: Extruded Aluminum Lens: Extra Clear Glass Diffuser
CCT	2700K, 3000K (2200K, RGBW on request)
CRI	>90
Delivered Lumens	1741 lm (12°) 1783 lm (30°) 1657 lm (45°) 1896 lm (25°x 60°) 1718 lm (25° x 60° β10°)
Efficacy	96.7 lm/W (12°) 99.1 lm/W (30°) 92.1 lm/W (45°) 105.3 lm/W (25°x 60°) 95.4 lm/W (25° x 60° β10°)
Optics	12°, 30°, 45°, 25°x60°, 25°x60° β10°
Finishes	5 Standard, See Below
Fixture Dimensions	12.5" l x 3.0" h x 1.9" w (surface mount version) 13.8" l x 4.3" h x 1.9" w (projector version) 13.0" l x 3.7" h x 4.3" w (recessed version)
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10

ORDERING INFORMATION


Example: LNEYL3POSFHBEZU.US. Accessories ordered separately.

LNEYL3				BEZ		US
Model #	Size	Optics	CCT	Power	Finish	
LNEYL3	POS - Surface Mount PR1 - Projector ISO - Recessed <i>NOTE: Recessed version only available in white finish</i>	S - 12° Spot M - 30° Medium F - 45° Flood E - 25° x 60° Elliptical G - 25° x 60° β10° Grazing	Y - 2700K H - 3000K	BEZ - Integral	G - Black H - Gray L - Graphite V - Oxide U - White <i>Recessed version only available in white finish</i>	US


Job Name/Date:

Fixture Type Designation:



FIXTURE DIMENSIONS





Ceiling version

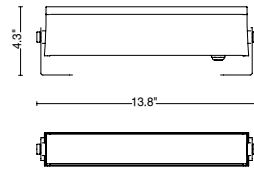


Projector version




Recessed version



recessed installation



flush installation



protruding installation

ACCESSORIES - Included

Ceiling Version

1.6' (0.5 m) length cable -05RN-F
Single connection IP68

Projector Version

3.28' (1 m) length cable -05RN-F
Single connection IP68
Fixing kit short (3.0")

Recessed Version

1.6 ft (0.5 m) length cable -05RN-F
Single connection IP68

OPTIONAL

00KEYFGL.150_ - Fixing kit medium (5.91")
(available in different colors)

00KEYFGL.250_ - Fixing kit long (9.84")
(available in different colors)

Visor

- COLOR OPTIONS**
- G - Black
 - H - Gray
 - L - Graphite
 - V - Oxide
 - U - White

OPTIONAL

00EY/FGL3.STD - Housing box


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometric data is 3000K

12°

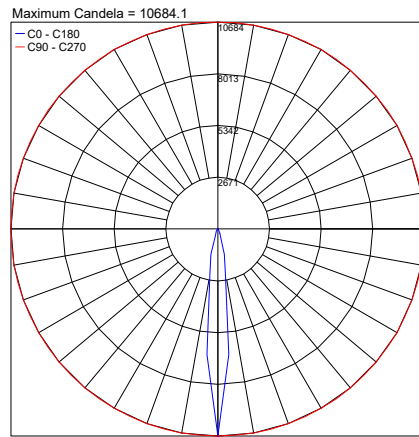


PHOTOMETRIC FILENAME : EYE-1 300 12° - EYL3XXXSHB10X.IES

30°

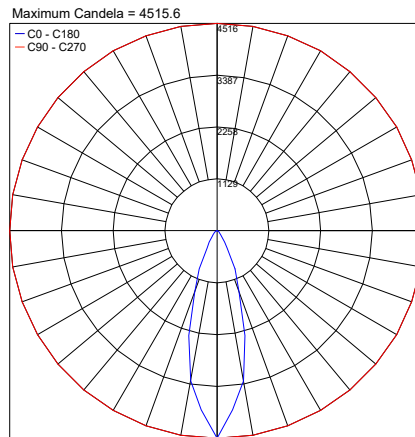


PHOTOMETRIC FILENAME : EYE-1 300 30° - EYL3XXXMHB10X.IES

25°x60°

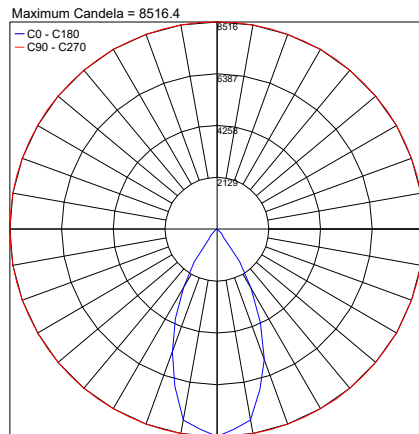

PHOTOMETRIC FILENAME : EYE-1 300 25° X 60° - EYL3XXXGHB10X.IES

25°x60° 10°

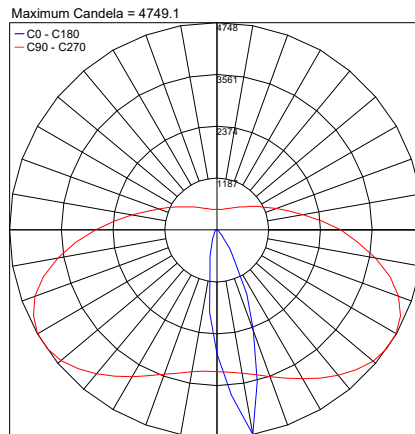

PHOTOMETRIC FILENAME : EYE-1 300 25° X 60° 10° - EYL3XXXGHB10X.IES

Job Name/Date:

Fixture Type Designation: