

eye_1 300



CEILING LAMP



PROJECTOR



Wattage 18W


Voltage 120-277VAC



Beam

Wattage 18W

Voltage 120-277VAC



Beam


TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 18W</u>
Total wattage	<u>24W</u>
Voltage	<u>120-277VAC, 50-60Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light color	<u>3000K (other colors on request**)</u>
Luminous flux	<u>1741 lm (2200 lm***)</u>
Luminous efficacy	<u>73 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>12°</u>
CRI	<u>> 90</u>
Life time	<u>L80-B15 > 60.000 h Ta 40°C</u>
IP rating	<u>IP67</u>
IK rating	<u>IK10</u>


* **Control available on request**
DALI - 0/10V - DMX - TRIAC

** **Light color available on request**
2200K • 2700K • RGBW

*** Source flux

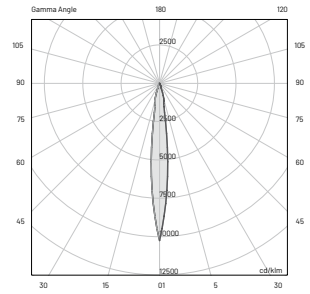

E (FC)		
H (ft)	fc (3000 K)	Ø (ft)
3.28'	1656.7	0.69'
6.56'	414.2	1.38'
9.84'	184.0	2.07'
13.12'	103.6	2.76'
16.40'	66.2	3.41'

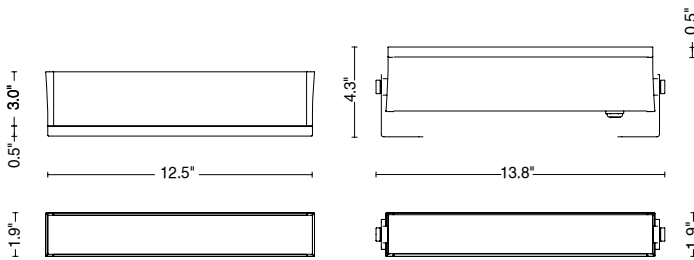

MEDIUM

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1783 lm (2200 lm***)

74 lm/W

3

30°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

FLOOD

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1657 lm (2200 lm***)

69 lm/W

3

45°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

ELLIPTIC

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1896 lm (2200 lm***)

79 lm/W

3

25° x 60°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

GRAZING

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1718 lm (2200 lm***)

72 lm/W

3





25° x 60° B10°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

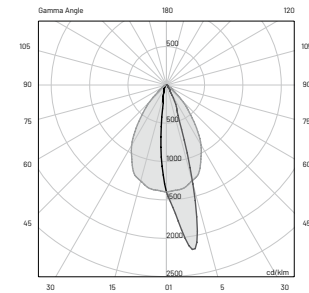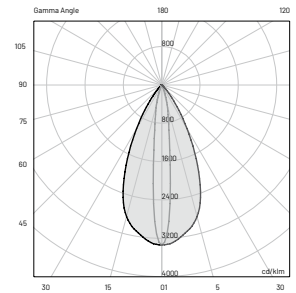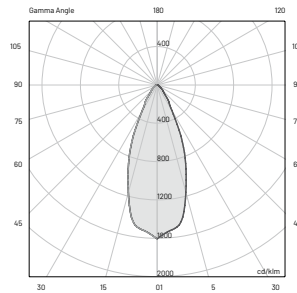
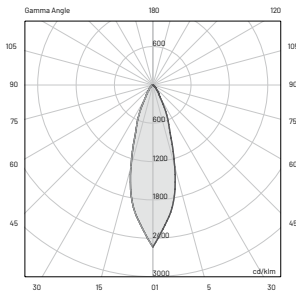


E (FC)

H (ft)	lux (3000K)	Ø (ft)
3.28'	419.6	1.80'
6.56'	104.9	3.64'
9.84'	46.5	5.45'
13.12'	26.2	7.28'
16.40'	16.8	9.09'

E (FC)

H (ft)	lux (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'

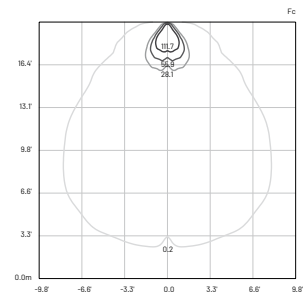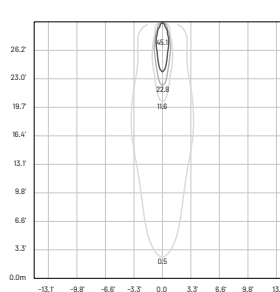

eye_1 300

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear glass
Finishing	Polyester powder paint

ORDER CODE

LNEY L 3 _ _ _ _ H B EZ _

Finishing	G	Black	●
	H	Grey	●
	L	Graphite	●
	U	White	○
	V	Oxide	●
Beam	S	Spot	
	M	Medium	
	F	Flood	
	E	Elliptic	
	G	Grazing	
Mounting	POS	Ceiling lamp	
	PR1	Projector	

Example LNEY L 3 POS S H B EZ L

INCLUDED ACCESSORIES

CEILING LAMP

Code	Description
-	1.64'(0.5 m) length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	3.28'(1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (2.95')

AVAILABLE ACCESSORIES

PROJECTOR

Code	Description
00KEYFGL.150_	Fixing kit medium (5.91") (available in different colors, see accessories section)
00KEYFGL.250_	Fixing kit long (9.84") (available in different colors, see accessories section)
-	Visor




eye_1 300

CEILING RECESSED



Wattage 18W

Voltage 120-277VAC





TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 18W</u>
Total wattage	<u>24W</u>
Voltage	<u>120-277VAC, 50-60Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light color	<u>3000K (other colors on request**)</u>
Luminous flux	<u>1741 lm (2200 lm***)</u>
Luminous efficacy	<u>73 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>12°</u>
CRI	<u>> 90</u>
Life time	<u>L80-B15 > 60.000 h Ta 40°C</u>
IP rating	<u>IP67</u>
IK rating	<u>IK10</u>

SPOT


- * **Control available on request**
DALI - 0/10V - DMX - TRIAC
- ** **Light color available on request**
2200K • 2700K • RGBW
- *** Source flux

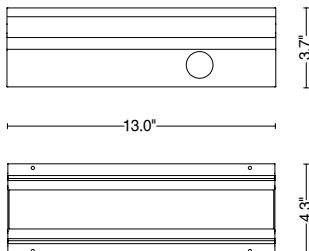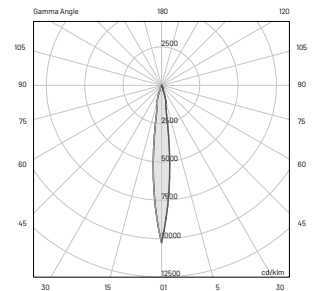


E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	1656.7	0.69'
6.56'	414.2	1.38'
9.84'	184.0	2.07'
13.12'	103.6	2.76'
16.40'	66.2	3.41'


recessed installation



flush installation



protruding installation



MEDIUM

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1783 lm (2200 lm***)

74 lm/W

3

30°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

FLOOD

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1657 lm (2200 lm***)

69 lm/W

3

45°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

ELLIPTIC

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

1896 lm (2200 lm***)

79 lm/W

3

25° x 60°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

GRAZING

LED 18W

24W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000 K (other colors on request**)

1718 lm (2200 lm***)

72 lm/W

3





25° x 60° B10°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

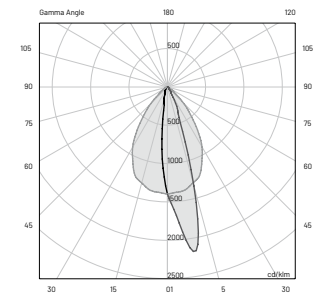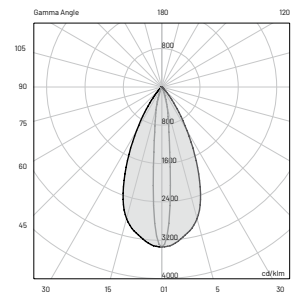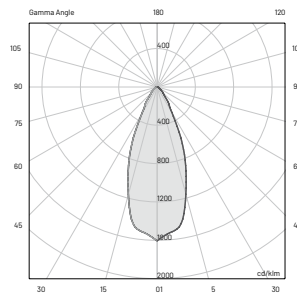
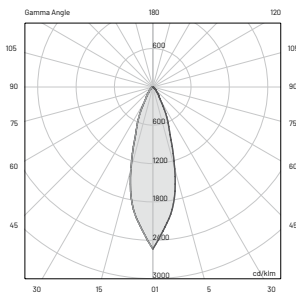


E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	419.6	1.80'
6.56'	104.9	3.64'
9.84'	46.5	5.45'
13.12'	26.2	7.28'
16.40'	16.8	9.09'

E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	22.9	2.56'
6.56'	5.7	5.12'
9.84'	2.6	7.68'
13.12'	1.4	10.20'
16.40'	0.9	12.76'

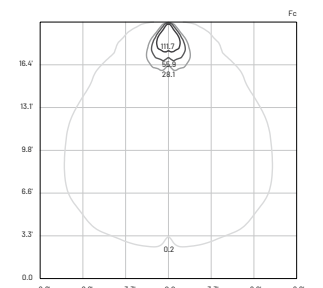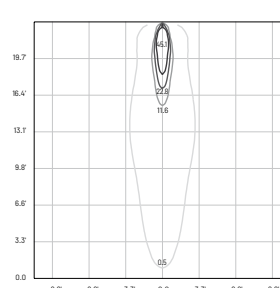


eye_1 300

MATERIALS

<i>Body</i>	<u>Extruded aluminum EN AW6060</u>
<i>Diffuser</i>	<u>Extra clear glass</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

ORDER CODE

LNEY L 3 ISO _ H B EZ U

 <i>Beam</i>	<u>S Spot</u>
	<u>M Medium</u>
	<u>F Flood</u>
	<u>E Elliptic</u>
	<u>G Grazing</u>

Example EY L 3 ISO **S** H B EZ U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>-</u>	<u>1.6' (0.5 m) length cable -05RN-F</u>
<u>-</u>	<u>Single connection IP68</u>

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>00EY/FGL3.STD</u>	<u>Housing box</u>