

eye_1 600



CEILING LAMP



Wattage 36W

Voltage 120-277VAC




PROJECTOR



Wattage 36W

Voltage 120-277VAC



TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 36W</u>
Total wattage	<u>43W</u>
Voltage	<u>120-277VAC, 50-60Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light colour	<u>3000K (other colors on request**)</u>
Luminous flux	<u>3638 lm (4406 lm***)</u>
Luminous efficacy	<u>85 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>12°</u>
CRI	<u>> 90</u>
Life time	<u>L80-B15 > 60.000 h Ta 40°C</u>
IP rating	<u>IP67</u>
IK rating	<u>IK10</u>



SPOT

Source lamp	<u>LED 36W</u>
Total wattage	<u>43W</u>
Voltage	<u>120-277VAC, 50-60Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light colour	<u>3000K (other colors on request**)</u>
Luminous flux	<u>3638 lm (4406 lm***)</u>
Luminous efficacy	<u>85 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>12°</u>
CRI	<u>> 90</u>
Life time	<u>L80-B15 > 60.000 h Ta 40°C</u>
IP rating	<u>IP67</u>
IK rating	<u>IK10</u>

* Control available on request
DALI - 0/10V - DMX - TRIAC

** Light color available on request
2200K • 2700K • RGBW

*** Source flux

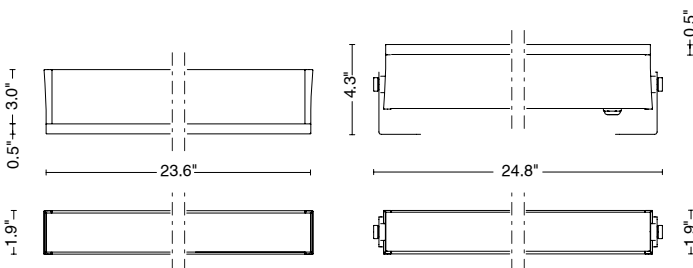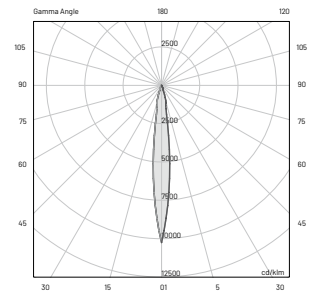

E (FC)

H (ft)	fc (3000 K)	Ø (ft)
3.28'	3313.5	0.69'
6.56'	828.4	1.38'
9.84'	368.2	2.07'
13.12'	207.1	2.76'
16.40'	132.6	3.41'

MEDIUM

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3566 lm (4406 lm***)

83 lm/W

3

30°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

FLOOD

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3314 lm (4406 lm***)

77 lm/W

3

45°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

ELLIPTIC

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3792 lm (4406 lm***)

88 lm/W

3

25° x 60°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

GRAZING

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3436 lm (4406 lm***)

80 lm/W

3





25° x 60° B10°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10





E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	839.2	1.80'
6.56'	209.8	3.64'
9.84'	93.3	5.45'
13.12'	52.5	7.28'
16.40'	33.4	9.09'

E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'








eye_1 600

MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear glass
Finishing	Polyester powder paint

ORDER CODE

LNEY L 6	---	H B EZ	---
	Finishing	G Black 	
		H Grey 	
		L Graphite 	
		U White 	
		V Oxide 	
	Beam	S Spot	
		M Medium	
		F Flood	
		E Elliptic	
		G Grazing	
	Mounting	POS Ceiling lamp	
		PR1 Projector	
Example		LNEY L 6 POS S H B EZ L	

INCLUDED ACCESSORIES

CEILING LAMP

Code	Description
-	1.6' (0.5 m) length cable -05RN-F
-	Single connection IP68

PROJECTOR

Code	Description
-	3.3' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short 3.0' (7.5 cm)

AVAILABLE ACCESSORIES

PROJECTOR

Code	Description
00KEYFGL.150_	Fixing kit medium 5.9' (15 cm) (available in different colors, see accessories section)
00KEYFGL.250_	Fixing kit long 9.8' (25 cm) (available in different colors, see accessories section)
-	Visor



eye_1 600

CEILING RECESSED



Wattage 36W

Voltage 120-277VAC




TECHNICAL SPECIFICATIONS

Source lamp	LED 36W
Total wattage	43W
Voltage	120-277VAC, 50-60Hz
Control	On/Off (other controls on request*)
Light color	3000K (other colors on request**)
Luminous flux	3638 lm (4406 lm***)
Luminous efficacy	85 lm/W
McADAM steps	3
Beam	12°
CRI	> 90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10

* **Control available on request**
DALI - 0/10V - DMX - TRIAC


** **Light color available on request**
2200K • 2700K • RGBW

*** Source flux

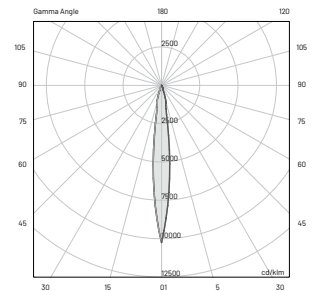


E (FC)


H (ft)	fc (3000K)	Ø (ft)
3.28'	3313.5	0.69'
6.56'	828.4	1.38'
9.84'	368.2	2.07'
13.12'	207.1	2.76'
16.40'	132.6	3.41'




recessed installation



flush installation



protruding installation



MEDIUM

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3566 lm (4406 lm***)

83 lm/W

3

30°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

FLOOD

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3314 lm (4406 lm***)

77 lm/W

3

45°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

ELLIPTIC

LED 36W

43W

120-277VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3792 lm (4406 lm***)

88 lm/W

3

25° x 60°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

GRAZING

LED 36W

43W

120VAC, 50-60Hz

On/Off (other controls on request*)

3000K (other colors on request**)

3436 lm (4406 lm***)

80 lm/W

3





25° x 60° B10°

> 90

L80-B15 > 60.000 h Ta 40°C

IP67

IK10

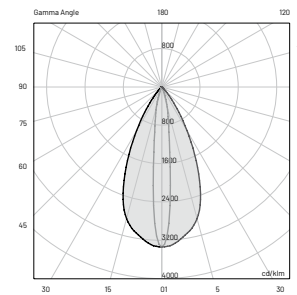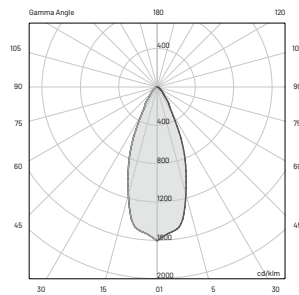
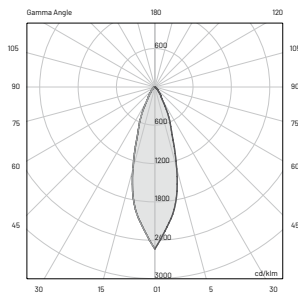


E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	839.2	1.80'
6.56'	209.8	3.64'
9.84'	93.3	5.45'
13.12'	52.5	7.28'
16.40'	33.4	9.09'

E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'

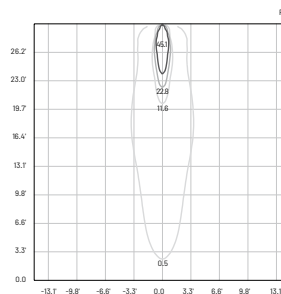


eye_1 600

MATERIALS

<i>Body</i>	<u>Extruded aluminum EN AW6060</u>
<i>Diffuser</i>	<u>Extra clear glass</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

ORDER CODE

LNEY L 6 ISO _ H B E Z U

 <i>Beam</i>	<u>S Spot</u>
	<u>M Medium</u>
	<u>F Flood</u>
	<u>E Elliptic</u>
	<u>G Grazing</u>

Example LNEY L 6 ISO S H B E Z U

INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>-</u>	<u>1.6 ft (0.5 m) length cable -05RN-F</u>
<u>-</u>	<u>Single connection IP68</u>

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>00EY/FGL6.STD</u>	<u>Housing box</u>