

# eye\_1 900



## CEILING LAMP



Wattage 48W

Voltage 120-277VAC




## PROJECTOR



Wattage 48W

Voltage 120-277VAC



## TECHNICAL SPECIFICATIONS


Source lamp	<u>LED 48W</u>
Total wattage	<u>60W</u>
Voltage	<u>120-277VAC, 50-60Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light colour	<u>3000K (other colors on request**)</u>
Luminous flux	<u>4693 lm (5684 lm***)</u>
Luminous efficacy	<u>80 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>12°</u>
CRI	<u>&gt; 90</u>
Life time	<u>L80-B15 &gt; 60.000 h Ta 40°C</u>
IP rating	<u>IP67</u>
IK rating	<u>IK10</u>

### SPOT

\* **Control available on request**  
DALI - 0/10V - DMX - TRIAC


\*\* **Light color available on request**  
2200K • 2700K • RGBW

\*\*\* Source flux



### E (FC)

H (fc)	fc (3000K)	Ø (ft)
3.28'	4274.7	0.69'
6.56'	1068.7	1.38'
9.84'	474.9	2.07'
13.12'	267.2	2.76'
16.40'	170.9	3.41'

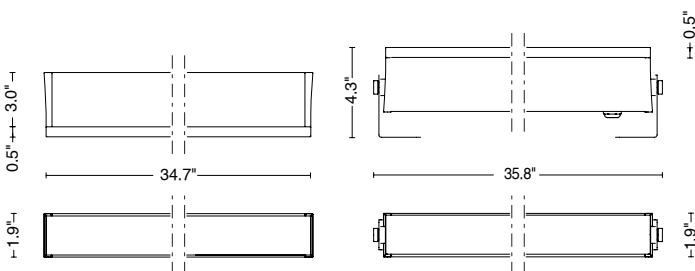

**MEDIUM**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4660 lm (5684 lm\*\*\*)

---

78 lm/W

---

3

---

30°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**FLOOD**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4275 lm (5684 lm\*\*\*)

---

72 lm/W

---

3

---

45°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**ELLIPTIC**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4892 lm (5684 lm\*\*\*)

---

83 lm/W

---

3

---

25° x 60°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**GRAZING**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4432 lm (5684 lm\*\*\*)

---

75 lm/W

---

3

---

25° x 60° B10°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C





---

IP67

---

IK10

---





**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	839.2	1.80'
6.56'	209.8	3.64'
9.84'	93.3	5.45'
13.12'	52.5	7.28'
16.40'	33.4	9.09'

**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'

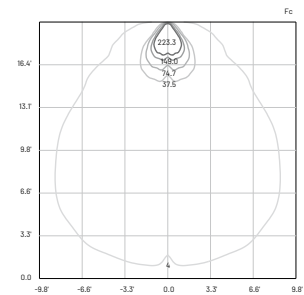






# eye\_1 900

## MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear glass
Finishing	Polyester powder paint

## ORDER CODE

LNEY L 9	---	H B EZ	---
	Finishing	<b>G</b> Black 	
		<b>H</b> Grey 	
		<b>L</b> Graphite 	
		<b>U</b> White 	
		<b>V</b> Oxide 	
	Beam	<b>S</b> Spot	
		<b>M</b> Medium	
		<b>F</b> Flood	
		<b>E</b> Elliptic	
		<b>G</b> Grazing	
	Mounting	<b>POS</b> Ceiling lamp	
		<b>PR1</b> Projector	
Example		<b>LNEY L 9 POS S H B EZ L</b>	

## INCLUDED ACCESSORIES

### CEILING LAMP

Code	Description
-	1.6' (0.5 m) length cable -05RN-F
-	Single connection IP68

### PROJECTOR

Code	Description
-	3.3' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (3.0')

## AVAILABLE ACCESSORIES

### PROJECTOR

Code	Description
<b>00KEYFGL.150_</b>	Fixing kit medium (5.9") (available in different colours, see accessories section)
<b>00KEYFGL.250_</b>	Fixing kit long (9.8") (available in different colours, see accessories section)
-	Visor

# eye\_1 900

CEILING RECESSED



Wattage 48W

Voltage 120-277VAC




## TECHNICAL SPECIFICATIONS

Source lamp	LED 48W
Total wattage	60W
Voltage	120-277VAC, 50-60Hz
Control	On/Off (other controls on request*)
Light color	3000K (other colors on request**)
Luminous flux	4693 lm (5684 lm***)
Luminous efficacy	80 lm/W
McADAM steps	3
Beam	12°
CRI	> 90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10

\* **Control available on request**  
DALI - 0/10V - DMX - TRIAC


\*\* **Light color available on request**  
2200K • 2700K • RGBW

\*\*\* Source flux




## E (FC)


H (ft)	fc (3000K)	Ø (ft)
3.28'	4274.7	0.69'
6.56'	1068.7	1.38'
9.84'	474.9	2.07'
13.12'	267.2	2.76'
16.40'	170.9	3.41'




recessed installation



flush installation



protruding installation



**MEDIUM**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4660 lm (5684 lm\*\*\*)

---

78 lm/W

---

3

---

30°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**FLOOD**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4275 lm (5684 lm\*\*\*)

---

72 lm/W

---

3

---

45°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**ELLIPTIC**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4892 lm (5684 lm\*\*\*)

---

83 lm/W

---

3

---

25° x 60°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**GRAZING**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4432 lm (5684 lm\*\*\*)

---

75 lm/W

---

3

---

25° x 60° B10°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C





---

IP67

---

IK10

---

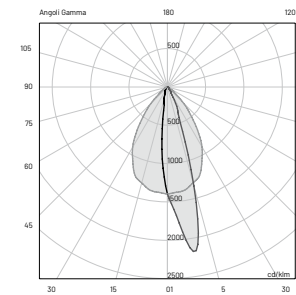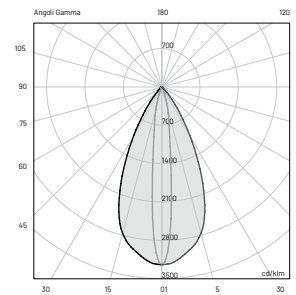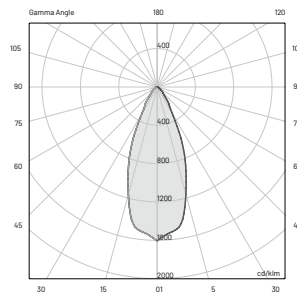
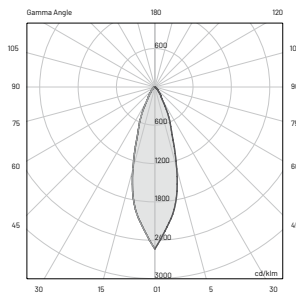


**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	839.2	1.80'
6.56'	209.8	3.64'
9.84'	93.3	5.45'
13.12'	52.5	7.28'
16.40'	33.4	9.09'

**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'

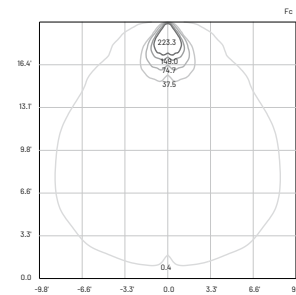


# eye\_1 900

## MATERIALS

<i>Body</i>	<u>Extruded aluminum EN AW6060</u>
<i>Diffuser</i>	<u>Extra clear glass</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

## ORDER CODE

LNEY L 9 ISO \_ H B E Z U

 <i>Beam</i>	<u>S Spot</u>
	<u>M Medium</u>
	<u>F Flood</u>
	<u>E Elliptic</u>
	<u>G Grazing</u>

*Example* LNEY L 9 ISO S H B E Z U

## INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>-</u>	<u>1.6' (0.5 m) length cable -05RN-F</u>
<u>-</u>	<u>Single connection IP68</u>

## AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>00EY/FGL9.STD</u>	<u>Housing box</u>