

# eye\_1 900



## CEILING LAMP



## PROJECTOR



Wattage 48W


Voltage 120-277VAC



Beam

Wattage 48W

Voltage 120-277VAC



Beam


## TECHNICAL SPECIFICATIONS

Source lamp	<b>SPOT</b> LED 48W
Total wattage	60W
Voltage	120-277VAC, 50-60Hz
Control	On/Off (other controls on request*)
Light colour	3000K (other colors on request**)
Luminous flux	4693 lm (5684 lm***)
Luminous efficacy	80 lm/W
McADAM steps	3
Beam	12°
CRI	> 90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10


\* **Control available on request**  
DALI - 0/10V - DMX - TRIAC

\*\* **Light color available on request**  
2200K • 2700K • RGBW

\*\*\* Source flux

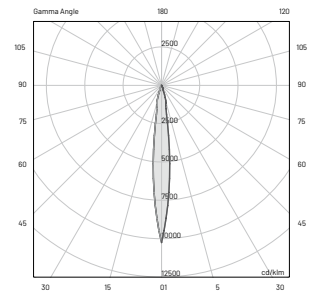

E (FC)		
H (fc)	fc (3000K)	Ø (ft)
3.28'	4274.7	0.69'
6.56'	1068.7	1.38'
9.84'	474.9	2.07'
13.12'	267.2	2.76'
16.40'	170.9	3.41'

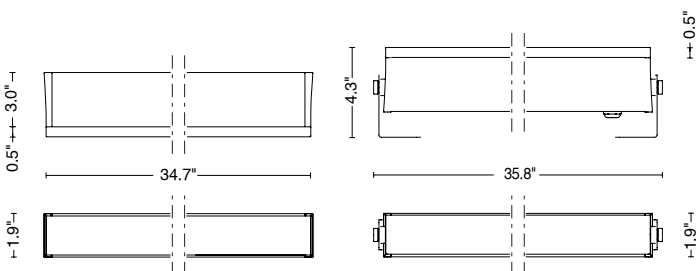

**MEDIUM**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4660 lm (5684 lm\*\*\*)

---

78 lm/W

---

3

---

30°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**FLOOD**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4275 lm (5684 lm\*\*\*)

---

72 lm/W

---

3

---

45°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**ELLIPTIC**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4892 lm (5684 lm\*\*\*)

---

83 lm/W

---

3

---

25° x 60°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**GRAZING**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000K (other colors on request\*\*)

---

4432 lm (5684 lm\*\*\*)

---

75 lm/W

---

3

---

25° x 60° B10°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C





---

IP67

---

IK10

---

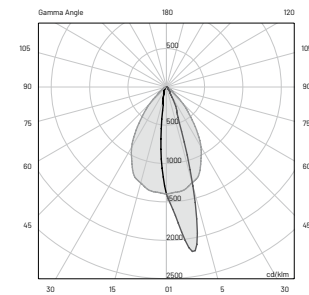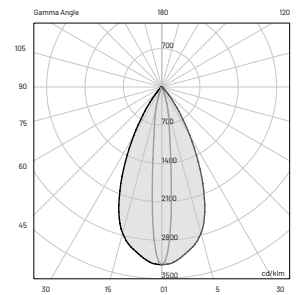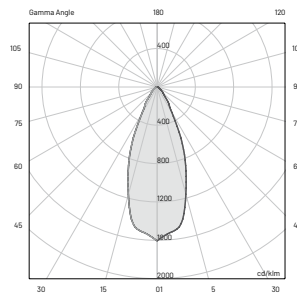
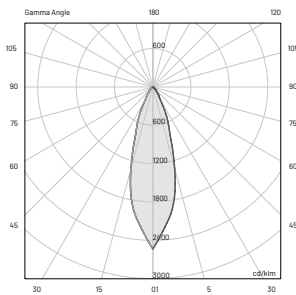


**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	839.2	1.80'
6.56'	209.8	3.64'
9.84'	93.3	5.45'
13.12'	52.5	7.28'
16.40'	33.4	9.09'

**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'

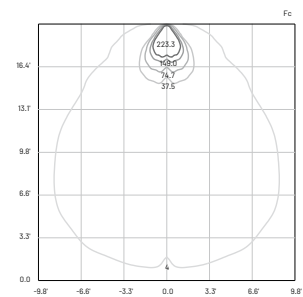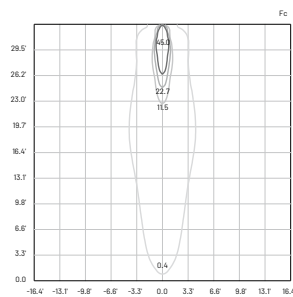

# eye\_1 900

## MATERIALS

Body	Extruded aluminum EN AW6060
Diffuser	Extra clear glass
Finishing	Polyester powder paint

## ORDER CODE

LNEY L 9 \_ \_ H B FZ \_

Finishing	G	Black	●
	H	Grey	●
	L	Graphite	●
	U	White	○
	V	Oxide	●
Beam	S	Spot	
	M	Medium	
	F	Flood	
	E	Elliptic	
	G	Grazing	
Mounting	POS	Ceiling lamp	
	PR1	Projector	

Example LNEY L 9 POS S H B FZ L

## INCLUDED ACCESSORIES

### CEILING LAMP

Code	Description
-	1.6' (0.5 m) length cable -05RN-F
-	Single connection IP68

### PROJECTOR

Code	Description
-	3.3' (1 m) length cable -05RN-F
-	Single connection IP68
-	Fixing kit short (3.0')

## AVAILABLE ACCESSORIES

### PROJECTOR

Code	Description
00KEYFGL.150_	Fixing kit medium (5.9") (available in different colours, see accessories section)
00KEYFGL.250_	Fixing kit long (9.8") (available in different colours, see accessories section)
-	Visor

# eye\_1 900

CEILING RECESSED



Wattage 48W

Voltage 120-277VAC





## TECHNICAL SPECIFICATIONS

Source lamp	LED 48W
Total wattage	60W
Voltage	120-277VAC, 50-60Hz
Control	On/Off (other controls on request*)
Light color	3000K (other colors on request**)
Luminous flux	4693 lm (5684 lm***)
Luminous efficacy	80 lm/W
McADAM steps	3
Beam	12°
CRI	> 90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	IP67
IK rating	IK10

\* Control available on request  
DALI - 0/10V - DMX - TRIAC

\*\* Light color available on request  
2200K • 2700K • RGBW


\*\*\* Source flux

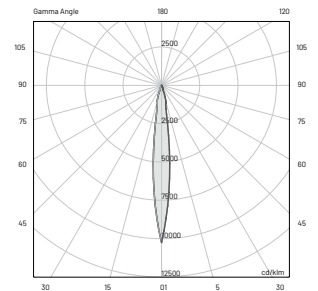


## E (FC)

H (ft)	fc (3000K)	Ø (ft)
3.28'	4274.7	0.69'
6.56'	1068.7	1.38'
9.84'	474.9	2.07'
13.12'	267.2	2.76'
16.40'	170.9	3.41'


recessed installation



flush installation



protruding installation



**MEDIUM**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4660 lm (5684 lm\*\*\*)

---

78 lm/W

---

3

---

30°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**FLOOD**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4275 lm (5684 lm\*\*\*)

---

72 lm/W

---

3

---

45°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**ELLIPTIC**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4892 lm (5684 lm\*\*\*)

---

83 lm/W

---

3

---

25° x 60°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C

---

IP67

---

IK10

---

**GRAZING**

---

LED 48W

---

60W

---

120-277VAC, 50-60Hz

---

On/Off (other controls on request\*)

---

3000 K (other colors on request\*\*)

---

4432 lm (5684 lm\*\*\*)

---

75 lm/W

---

3

---

25° x 60° B10°

---

> 90

---

L80-B15 > 60.000 h Ta 40°C





---

IP67

---

IK10

---

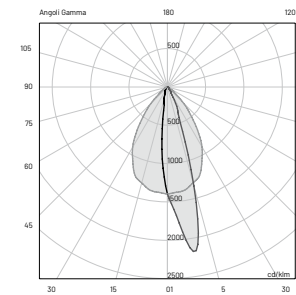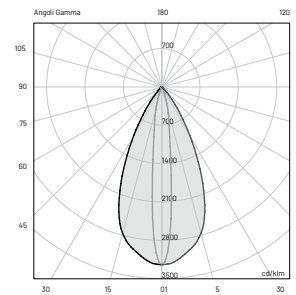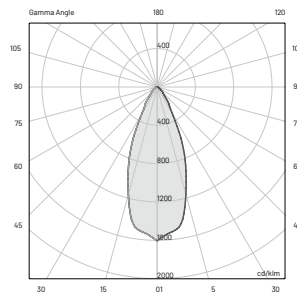
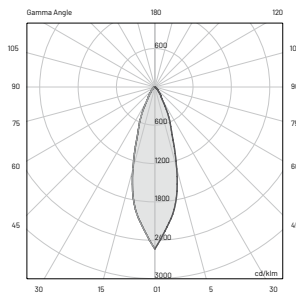


**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	839.2	1.80'
6.56'	209.8	3.64'
9.84'	93.3	5.45'
13.12'	52.5	7.28'
16.40'	33.4	9.09'

**E (FC)**

H (ft)	fc (3000K)	Ø (ft)
3.28'	246.9	2.56'
6.56'	61.7	5.12'
9.84'	27.4	7.68'
13.12'	15.4	10.20'
16.40'	9.8	12.76'

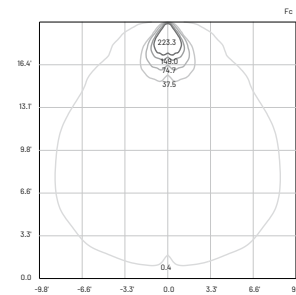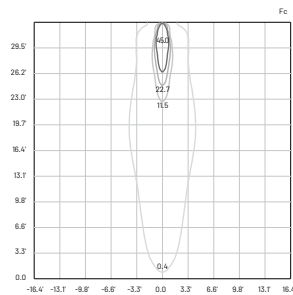

# eye\_1 900

## MATERIALS

<i>Body</i>	<u>Extruded aluminum EN AW6060</u>
<i>Diffuser</i>	<u>Extra clear glass</u>
<i>Finishing</i>	<u>Polyester powder paint</u>

## ORDER CODE

LNEY L 9 ISO \_ H B FZ U

<u>Beam</u>	<b>S</b> Spot
	<b>M</b> Medium
	<b>F</b> Flood
	<b>E</b> Elliptic
	<b>G</b> Grazing

*Example* LNEY L 9 ISO S H B FZU

## INCLUDED ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>-</u>	<u>1.6' (0.5 m) length cable -05RN-F</u>
<u>-</u>	<u>Single connection IP68</u>

## AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>
<u>00EY/FGL9.STD</u>	<u>Housing box</u>