


# FIXED B-02


Fixed is a stainless steel, IP66-rated, wall mounted LED luminaire with clean lines and a compact design that is suitable for outdoor installation. It is available in mono or bi light emission, with one, two or three LEDs, and 3 standard Hard Coat Treatment finishes. FIXED B02 is the 2 x 10W (2 Up / 2 Down LEDs) double, bi light version.



## TECHNICAL DATA

<b>Wattage / Input</b>	2 X 10W
<b>Power Supply</b>	Remote 350mA - See page 2
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U4-G0 (3000K)
<b>Delivered Lumens</b>	550 lm per beam (3000K)
<b>Efficacy</b>	110 lm/W per beam (3000K)
<b>Optics</b>	21°, 45°, 65°
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	4.7" h x 2.4" w x 6.3" l
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components

Fixture Dimensions - See page 2

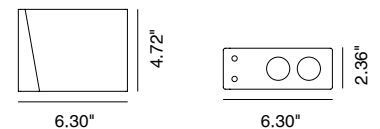

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT4025034G.US. Power Supplies / Accessories sold separately.

SPT40250				.US
Model No.	CCT	Optics	Finishes	
SPT40250 (B02)	2 - 2700K 3 - 3000K 4 - 4000K	2 - 21° 4 - 45° 6 - 65°	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

## FINISHES



Inox Natural



Inox Graphite



Inox Bronze

## SUGGESTED POWER SUPPLIES

350mA - Bi Emission


Part Number	Description	Input/Output	# of Fixtures - B02
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	—
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	—
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: All photometric data is 3000K


Maximum Candela = 3961.6

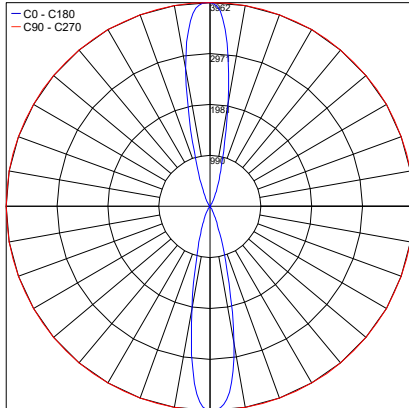

PHOTOMETRIC FILENAME : B-02 30K 21° BRONZE - PT4025032B.IES

21°


Maximum Candela = 1337.4

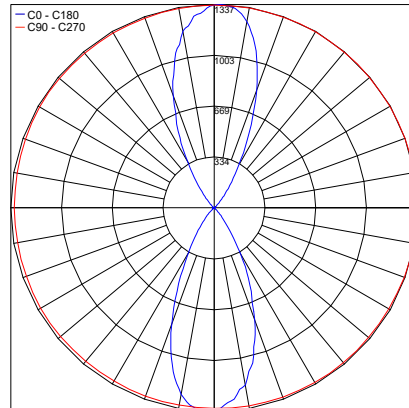

PHOTOMETRIC FILENAME : DYKE b02 30k 45° PT4025034B.IES

45°

Maximum Candela = 773.7

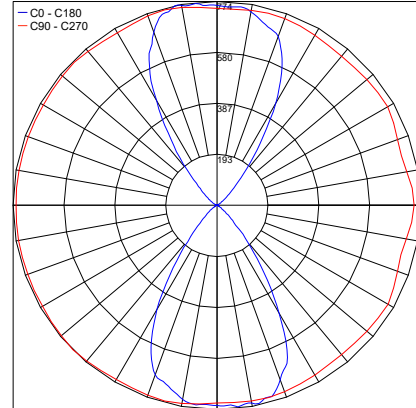

PHOTOMETRIC FILENAME : B-02 30K 65° BRONZE - PT4025036B.IES

65°

Job Name/Date:

Fixture Type Designation: