

FIXED

About

Compact and sober, its reduced volume emerges from the walls to which it is applied. Set like the sedimentations that we find in rocks capable of drawing motifs that well integrate themselves into the wall, these shapes are present with a specific function even in the harshest environments, and hence that from this concept, FIXED is born.

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

M 01



Inox Natural



Inox Graphite



Inox Bronze



M 02



Inox Natural



Inox Graphite



Inox Bronze



M 03



Inox Natural



Inox Graphite



Inox Bronze



B 01



Inox Natural



Inox Graphite



Inox Bronze




B 02



Inox Natural



Inox Graphite

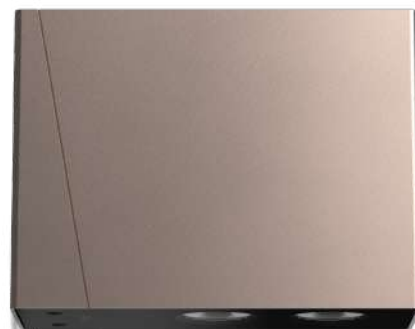


Inox Bronze



B 03



Inox Natural

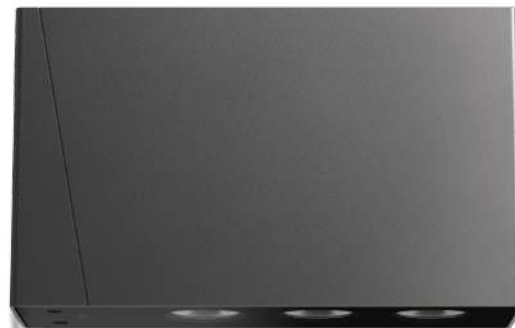

Inox Graphite



Inox Bronze




The spacer integrated with the lamp body makes the product compact. Made of AISI 316L stainless steel. Flush black silk-screened glass extra-clear tempered, 0.16" thick. Mono and bi-emission versions with one, two or three LEDs for different design needs. 21°, 45° and 65° optics at 2700K, 3000K and 4000K. Integrated power supply. HCT surface finish available in three variants.

FIXED M01



Color			Emission
2700 K	3000 K	4000 K	
543 lm	550 lm	613 lm	21°

Power		Codes Technical details
5W		




IP66	IK08
------	------

FIXED M02



Color			Emission
2700 K	3000 K	4000 K	
1087 lm	1100 lm	1227 lm	21°

Power		Codes Technical details
10W		




IP66	IK08
------	------

FIXED M03



Color			Emission
2700 K	3000 K	4000 K	
1630 lm	1650 lm	1840 lm	21°

Power		Codes Technical details
15W		




IP66	IK08
------	------

FIXED B01



Color			Emission
2700 K	3000 K	4000 K	
2 x 543 lm	2 x 550 lm	2 x 613 lm	21° + 21°

Power		Codes Technical details
2 x 5W		




IP66	IK08
------	------

FIXED B02




Color			Emission
2700 K	3000 K	4000 K	
2 x 1087 lm	2 x 1100 lm	2 x 1227 lm	21° + 21°

Power		Codes Technical details
2 x 10W		




IP66	IK08
------	------

FIXED B03

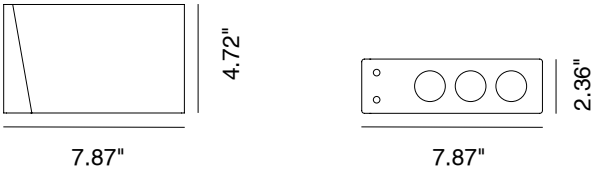

Color			Emission
2700 K	3000 K	4000 K	
2x1630 lm	2x1650 lm	2x1840 lm	21° + 21°

Power		Codes Technical details
2 x 15W		



IP66	IK08
------	------

