


# FIXED M-01


FIXED is a stainless steel, IP66-rated, wall mounted LED luminaire with clean lines and a compact design that is suitable for outdoor installation. It is available in mono or bi light emission, with one, two or three LEDs, and 3 standard Hard Coat Treatment finishes. FIXED M-01 is the 5W (1 LED) mono light version.



## TECHNICAL DATA

<b>Wattage</b>	5W
<b>Power Supply</b>	Remote 350mA - See page 2
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
<b>CCT</b>	2200K, 2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	550 lm per beam (3000K)
<b>Efficacy</b>	110 lm/W per beam (3000K)
<b>Optics</b>	21°, 45°, 65°, Asymmetric, Road
<b>BUG Rating</b>	B1-U0-G0 (21°, 3000K) B0-U1-G0 (Asym, 3000K) B0-U0-G0 (Road, 3000K)
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	2.8" h x 2.4" w x 4.7"
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08
<b>Warranty</b>	10 Years Against Corrosion 5 Years on Electrical Components

### Fixture Dimensions



**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT4021034G.US. Power Supplies / Accessories sold separately.

SPT40210				.US
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finishes</b>	
SPT40210 (M01)	1 - 2200K 2 - 2700K 3 - 3000K 4 - 4000K	2 - 21° 4 - 45° 6 - 65° 7 - Asymmetrical 8 - Road Optics	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

## FINISHES



Inox Natural



Inox Graphite



Inox Bronze

## SUGGESTED POWER SUPPLIES

350mA - Mono Emission

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00148</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 6W, Class 2	1-1
<a href="#">PPLT00496</a>	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-2
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-4
<a href="#">PPLT00467-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4
<a href="#">PPLT00561-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-5

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	2-2


For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA


Note: All photometric data is 3000K

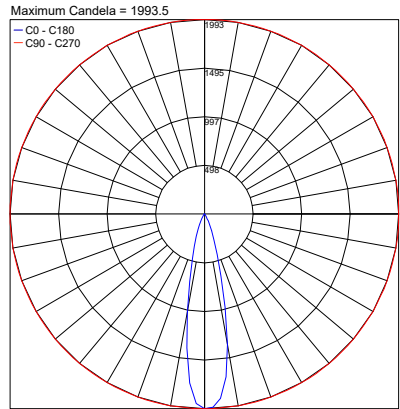


21°

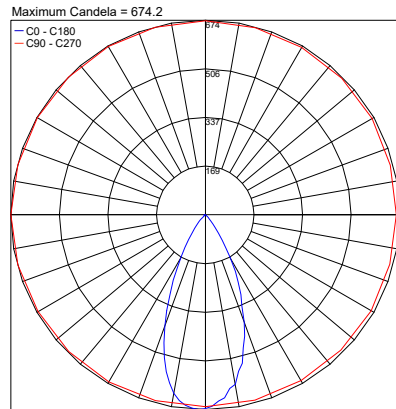


45°

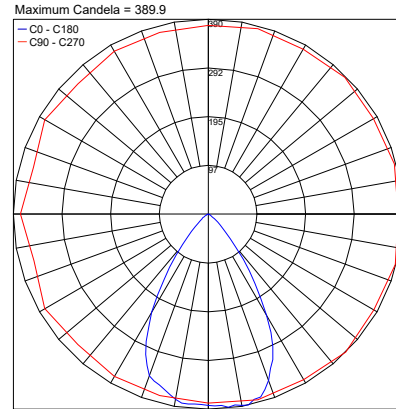

65°

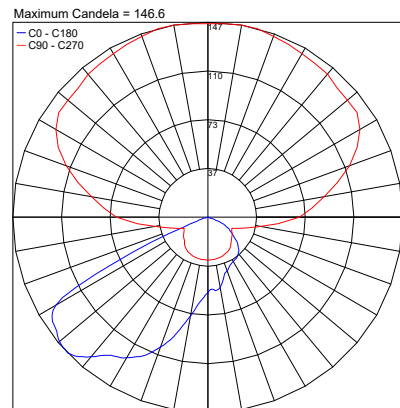

Asymmetric

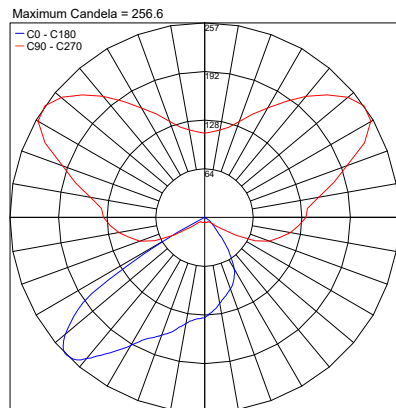

Road

Job Name/Date:

Fixture Type Designation: