

FLEX

01 02 03

Μ




www.designplan.com

79 Trenton Avenue Frenchtown, NJ 08825 Tel: (908) 996-7710 Fax: (908) 996-7042







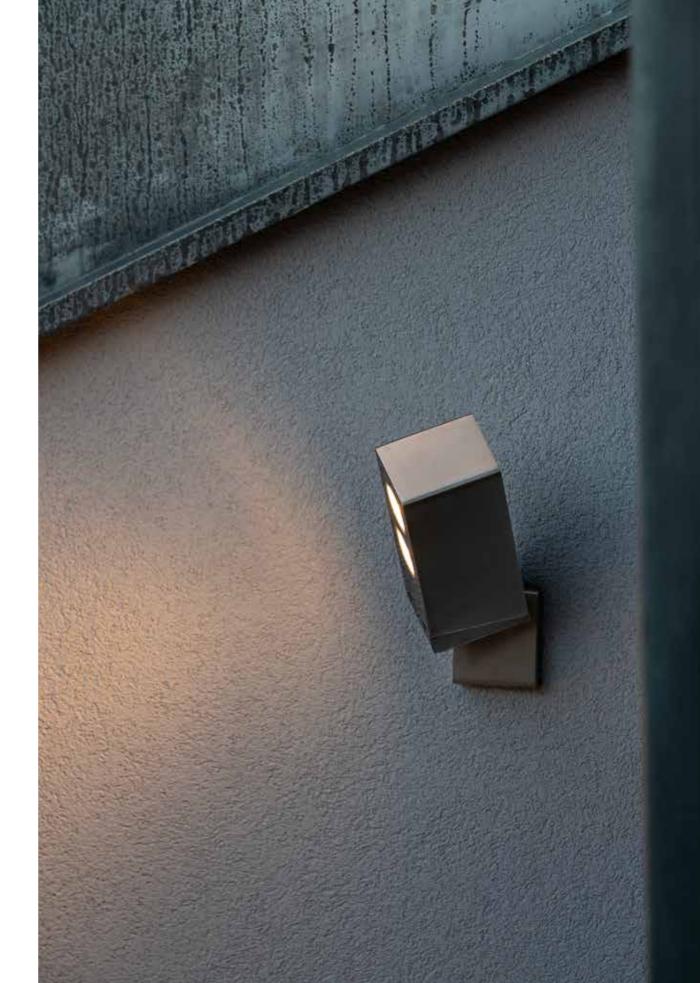

FLEX M02, INOX GRAPHITE ↑ FLEX M02, INOX NATURAL, 3000K →



Exploded view fixing bracket



Bracket joint detail



Two-axis swiveling



The spacer integrated with the lamp body makes the product compact. Made of stainless steel AISI 316L. Extra-clear black silk-screened tempered glass, **0.16** inches thick. Available in single and dual emission versions with one, two, or three LEDs to meet different design requirements. Optics include 21°, 45°, 65°, asymmetric, and street optics with color temperatures of 2700K, 3000K, and 4000K; the latter two optics are available only for single emission versions. Integrated power supply. Surface finish HCT available in three variants.


M01







M03





| M01 | Emission | 21° / 45° / 65° |
|------------|---|---|
| | | |
| | 2.76 | |
| 5.43" | | 5.43" |
| Info | Temperature | 2700K (543 lm) / 3000K (550 lm) / 4000K (613 lm) |
| | Power | LED 5W |
| | Finish | INOX Natural INOX Graphite INOX Bronze |
| | Characteristics | IK08, IP66, DALI |
| | Accessories | - |
| M02 | Emission | 21° / 45° / 65° |
| | 2.76" | 5.36" |
| 7.01" | | 7.01" |
| | Temperature | |
| | | 7.01" |
| 7.01" | Temperature | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) |
| | Temperature Power | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W |
| | Temperature Power Finish | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W INOX Natural INOX Graphite INOX Bronze |
| nfo | Temperature Power Finish Characteristics | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W INOX Natural INOX Graphite INOX Natural INOX Bronze IK08, IP66, DALI |
| | Temperature Power Finish Characteristics Accessories | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W INOX Natural INOX Graphite INOX Natural INOX Bronze IK08, IP66, DALI - |
| nfo | Temperature Power Finish Characteristics Accessories Emission | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W INOX Natural INOX Graphite INOX Natural INOX Graphite IK08, IP66, DALI - |
| nfo MO3 | Temperature Power Finish Characteristics Accessories Emission | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W INOX Natural INOX Graphite INOX Natural INOX Graphite IK08, IP66, DALI - 21° / 45° / 65° |
| nfo MO3 | Temperature Power Finish Characteristics Accessories Emission | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W • INOX Natural • INOX Graphite • INOX Bronze IK08, IP66, DALI - 21° / 45° / 65° 8.58" |
| nfo MO3 | Temperature Power Finish Characteristics Accessories Emission Image: Second | 7.01" 2700K (1086 lm) / 3000K (1100 lm) / 4000K (1226 lm) LED 10W • INOX Natural • INOX Graphite • INOX Natural • INOX Bronze IK08, IP66, DALI - - - 21° / 45° / 65° - 8.58" × 2700K (1629 lm) / 3000K (1650 lm) / 4000K (1839 lm) |

IK08, IP66, DALI

-



FLEX designplan@

Characteristics Accessories



is the USA STRAL's official dealer

79 Trenton Avenue Frenchtown, NJ www.designplan.com

Tel: (908) 996-7710 Fax: (908) 996-7042