

Game is a stainless steel, IP67-rated LED steplight with single, double, quadruple or 180° openings that allow for a grazing accent lighting effect suitable for a variety of projects. It is available with a casing for wall or floor installation, 3 optics options, and in 3 standard Hard Coat Treatment finishes.



TECHNICAL DATA

Wattage / Input	3W per beam
Power Supply	Integral 120VAC (GAME N-180) Remote 700mA (GAME N-01, N-02, N-04)
Construction	Body: AISI 316L Stainless Steel
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	197 lm per beam (3000K)
Efficacy	65.7 lm/W per beam (3000K)
Optics	10°, 30° Asymmetric wide (on the N180 version only)
BUG Rating	B0-U3-G1 (N01 - 10°, 3000K) B0-U2-G1 (N01 - 30°, 3000K) B0-U3-G1 (N02 - 10° / 30°, 3000K) B0-U3-G2 (N04 - 10°, 3000K) B0-U3-G1 (N04 - 30°, 3000K) B0-U2-G1 (N180 - Asym Wide, 3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Ø5.7" x 1.8" h
IP Rating	IP66, IP67
Impact Resistance	IK08

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION


Example: SPT3042033B.US. Power Supplies / Accessories sold separately.

				.US
Model No.	CCT	Optics	Finishes	
SPT30410 (N01)	2 - 2700K	1 - 10°	N - Inox Natural	.US
SPT30420 (N02)	3 - 3000K	3 - 30°	G - Inox Graphite	
SPT30440 (N04)	4 - 4000K		B - Inox Bronze	
SPT30450 (N180)		4 - Asymmetric Wide		


Job Name/Date:

Fixture Type Designation:



Fixture Dimensions - See page 2

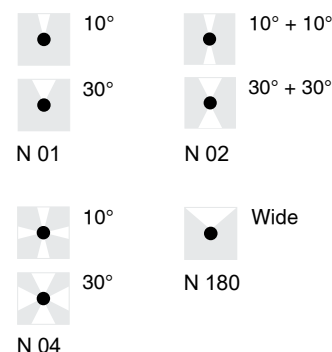



FIXTURE DIMENSIONS





N 01




N 02



N 04



N 180



FINISHES



Inox Natural



Inox Natural



Inox Natural



Inox Graphite



Inox Graphite



Inox Graphite



Inox Bronze



Inox Bronze




Inox Bronze

ACCESSORIES



PT50001
Outer Casing
For GAME fixture

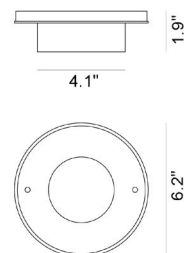

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures		
			N01	N02	N03
PPLT00498	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	3-4	—	
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	2-6	2-3	
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 30W, Class 2, DAMP	2-10	2-5	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	2-16	2-8	2-4
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 700mA, 100W, Class 2, DAMP	2-8 (2-32)	2-4 (2-16)	2-2 (2-8)


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00673	PEQE	PEQ	100%-0.1%	Hi-Lume™ Premier 0.1% Ecosystem (0.1%DIM) LED Driver	120-277VAC to 700mA, 20W, Class 2	6-6
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W, Class 2	8-9

For other power supply options consult factory.

PHOTOMETRIC DATA

NOTE: All photometry is 3000K

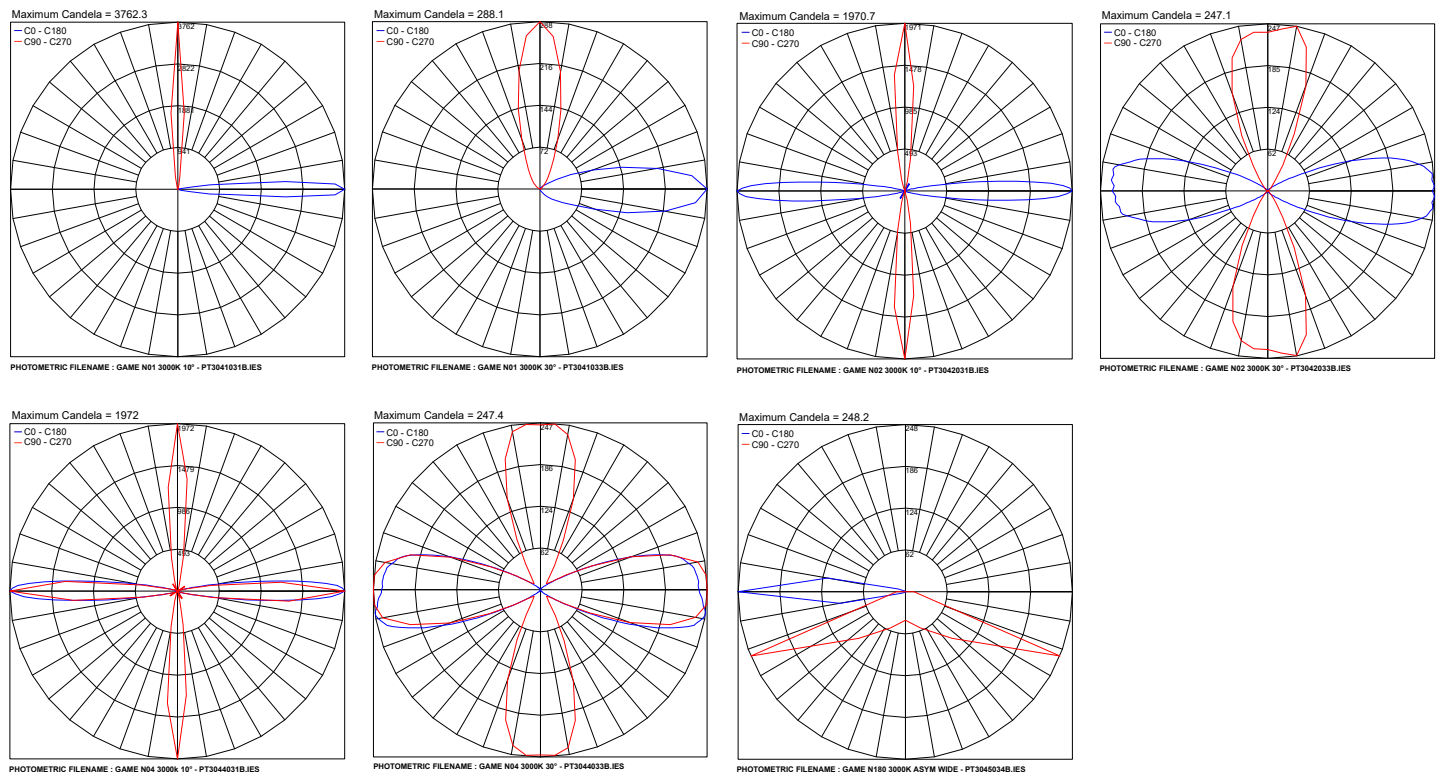

Job Name/Date:

Fixture Type Designation: