


The Ginko series IP66, IP69 projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI. Ginko 3.3 is the Ø3.3" RGBW version.

TECHNICAL DATA

Wattage / Input	11W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-Corrosive Aluminum or AISI 316L SS Bracket: AISI 316L Stainless Steel Lens: Tempered Extra-clear Glass Neoprene Cable: 4.9' Standard Length
CCT	RGBW
BUG Rating	B1-U0-G0 (RGBW - 19°) B0-U0-G0 (RGBW - 33°, 56°) B0-U1-G0 (RGBW - 32°x73°)
Delivered Lumens	272 lm: (R) 41 lm, (G) 85 lm, (B) 31 lm, (W) 189 lm (4000K)
Efficacy	24.7 lm/W
Optics	4 Standard (see below)
Finishes	7 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø3.31" x 3.46" x 2.95" h (max 6.22" h fully extended), 1.22" wide bracket
Fixture Weight	2.98 - 5.51 lbs
LED Source	1 group of 4 power LEDs
Lumen Maintenance	L85, B10 >50,000hrs (Ta 25°C)
Operating Temp.	-4°F to +113°F
IP Rating	IP66, IP69 (Tested to EN / IEC 60598-1)
Impact Rating	IK09



Fixture Dimensions

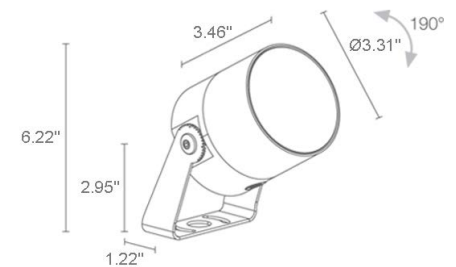

ORDERING INFORMATION

Example: GN3300000070MF-1. Accessories / Power Supplies ordered separately.

GN3300	0000	70			
Model No.	Wattage	CCT	Optics	Finish	Cable Length
GN3300	0000 - 11W	70 - RGBW	S - 19° M - 33° L - 56° X - adjustable 32°x73° 360° using the magnet provided	I - Stainless Steel E - White N - Black Anodized F - Gray H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288-P24	DMX / RDM (Field Addressable) / Dali (4 channels)	120-277VAC to 24VDC, 100W, Class 2	1-1 (1-4)


For other power supply options consult factory.

ACCESSORIES

Installation



WP0100
Ground Spike
(Length 10.12")



WP1006__ (Length 19.69")
WP1007__ (Length 31.50")
Ground Spike with Bracket
Include one of the below finishes:
I - Stainless Steel
E - White
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL



WP1004
Fastener Strap
(Length 16.4')

ACCESSORIES

Anti-Glare



WB8010__
Standard Snoot
Include one of the below finishes:
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL




WB8020__
Asymmetric Snoot
Include one of the below finishes:
E - White
N - Black anodized
F - Gray
H - Anthracite
T - Cor-ten
5 - Jasper Green
C - Custom RAL

Optical



WE0201
Magnet for rotating optics
For shadow-effect filter and
elliptical optics (W) 12° v x 64° h
and (X) 28° v x 72° h




Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Maximum Candela = 1690.9

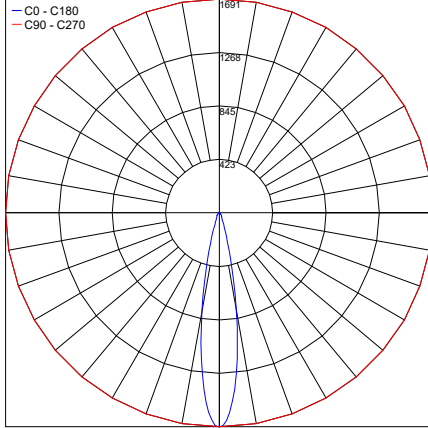


PHOTOMETRIC FILENAME : GINKO 3.3 S 19° [RGBW 11W].IES

Maximum Candela = 616.1

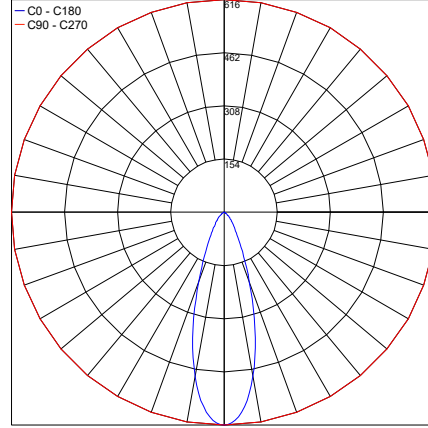


PHOTOMETRIC FILENAME : GINKO 3.3 M 33° [RGBW 11W].IES

Maximum Candela = 238.0

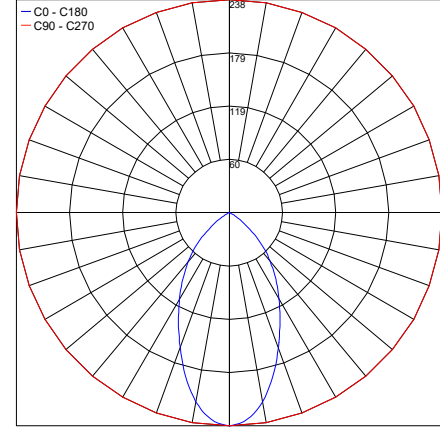


PHOTOMETRIC FILENAME : GINKO 3.3 L 56° [RGBW 11W].IES

Maximum Candela = 287.4

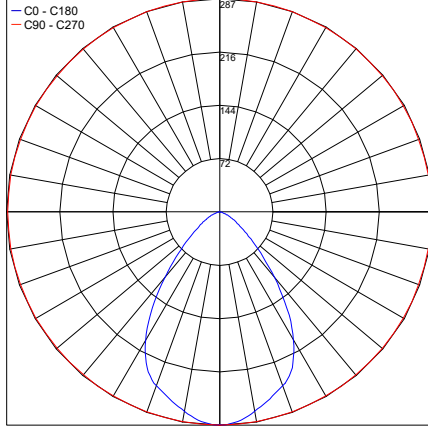


PHOTOMETRIC FILENAME : GINKO 3.3 X 32°X73° [RGBW 11W].IES

Maximum Candela = 714.9

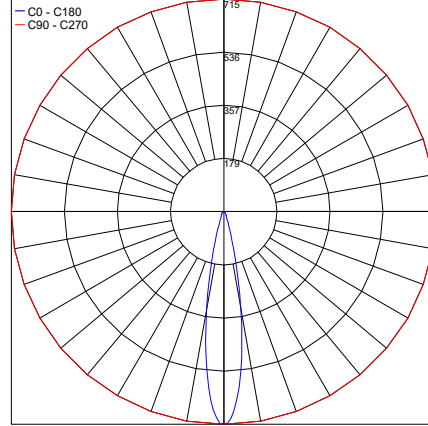


PHOTOMETRIC FILENAME : GINKO 3.3 S 19° [4000K 11W].IES

Maximum Candela = 121.5

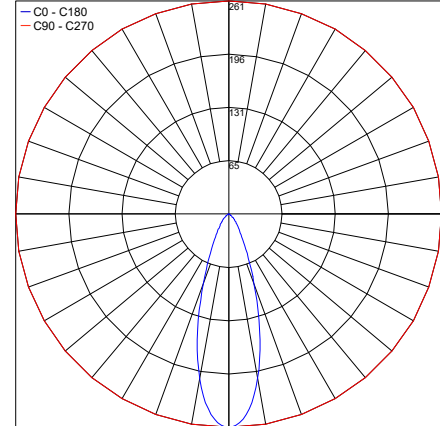


PHOTOMETRIC FILENAME : GINKO 3.3 M 33° [4000K 11W].IES

Maximum Candela = 100.51

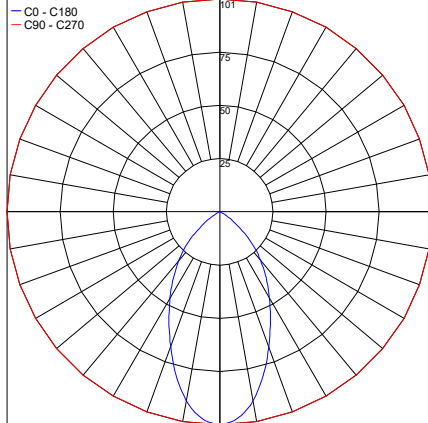

PHOTOMETRIC FILENAME : GINKO 3.3 L 56° [4000K 11W].IES

Maximum Candela = 121.5

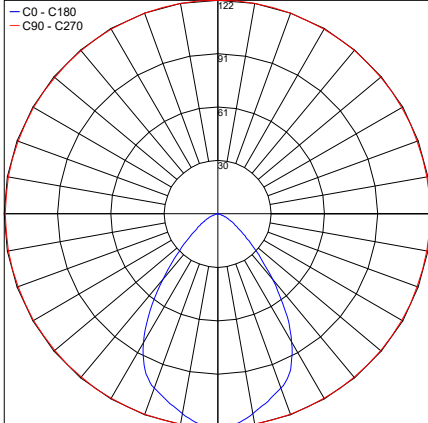

PHOTOMETRIC FILENAME : GINKO 3.3 X 32°X73° [4000K 11W].IES

Job Name/Date:

Fixture Type Designation: