

# GINKO 3.3


The Ginko series IP66, IP69 projectors are small and versatile. Available in a variety of finishes, optics (some models have integral adjustable optics), and 80 or 90 CRI. Ginko 3.3 is the Ø3.3" RGBW version.



## TECHNICAL DATA

<b>Wattage / Input</b>	11W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anti-Corrosive Aluminum or AISI 316L SS Bracket: AISI 316L Stainless Steel Lens: Tempered Extra-clear Glass Neoprene Cable: 4.9' Standard Length
<b>CCT</b>	RGBW
<b>BUG Rating</b>	B1-U0-G0 (RGBW - 19°) B0-U0-G0 (RGBW - 33°, 56°) B0-U1-G0 (RGBW - 32°x73°)
<b>Delivered Lumens</b>	272 lm: (R) 41 lm, (G) 85 lm, (B) 31 lm, (W) 189 lm (4000K)
<b>Efficacy</b>	24.7 lm/W
<b>Optics</b>	4 Standard (see below)
<b>Finishes</b>	7 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	Ø3.31" x 3.46" x 2.95" h (max 6.22" h fully extended), 1.22" wide bracket
<b>Fixture Weight</b>	2.98 - 5.51 lbs
<b>LED Source</b>	1 group of 4 power LEDs
<b>Lumen Maintenance</b>	L85, B10 >50,000hrs (Ta 25°C)
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66, IP69 (Tested to EN / IEC 60598-1)
<b>Impact Rating</b>	IK09

Fixture Dimensions

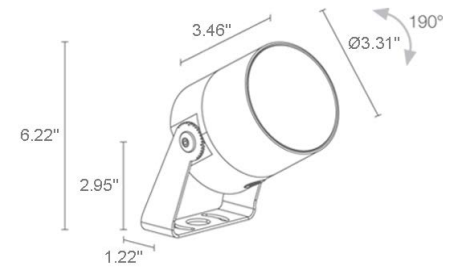

## ORDERING INFORMATION

Example: GN330000070MF-1. Accessories / Power Supplies ordered separately.

GN3300	0000	70			
Model No.	Wattage	CCT	Optics	Finish	Cable Length
GN3300	0000 - 11W	70 - RGBW	S - 19° M - 33° L - 56° X - adjustable 32°x73° 360° using the magnet provided	I - Stainless Steel E - White N - Black Anodized F - Gray H - Anthracite T - Corten 5 - Jasper Green C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00288-P24</a>	DMX / RDM (Field Addressable) / Dali (4 channels)	120-277VAC to 24VDC, 100W, Class 2	1-1 (1-4)

For other power supply options consult factory.

## ACCESSORIES

### Installation



**WP0100**  
Ground Spike  
(Length 10.12")



**WP1006\_\_** (Length 19.69")  
**WP1007\_\_** (Length 31.50")  
Ground Spike with Bracket  
Include one of the below finishes:  
I - Stainless Steel  
E - White  
N - Black anodized  
F - Gray  
H - Anthracite  
T - Cor-ten  
5 - Jasper Green  
C - Custom RAL



**WP1004**  
Fastener Strap  
(Length 16.4')

## ACCESSORIES

### Anti-Glare



**WB8010\_\_**  
Standard Snoot  
Include one of the below finishes:  
E - White  
N - Black anodized  
F - Gray  
H - Anthracite  
T - Cor-ten  
5 - Jasper Green  
C - Custom RAL




**WB8020\_\_**  
Asymmetric Snoot  
Include one of the below finishes:  
E - White  
F - Gray  
H - Anthracite  
T - Cor-ten  
5 - Jasper Green  
C - Custom RAL

## Optical




**WE0201**  
Magnet for rotating optics  
For shadow-effect filter and elliptical optics (W) 12° v x 64° h and (X) 28° v x 72° h




Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

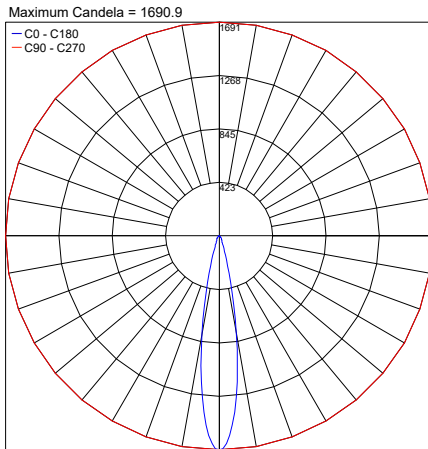


PHOTOMETRIC FILENAME : GINKO 3.3 S 19° [RGBW 11W].IES

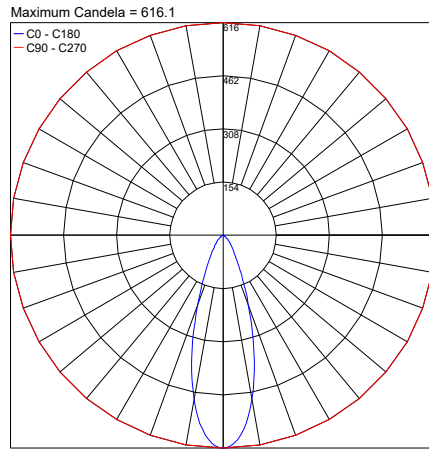


PHOTOMETRIC FILENAME : GINKO 3.3 M 33° [RGBW 11W].IES

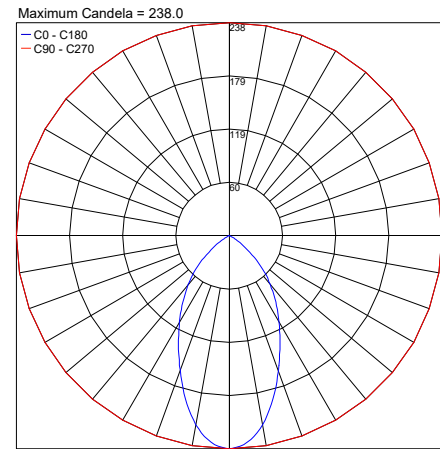


PHOTOMETRIC FILENAME : GINKO 3.3 L 56° [RGBW 11W].IES

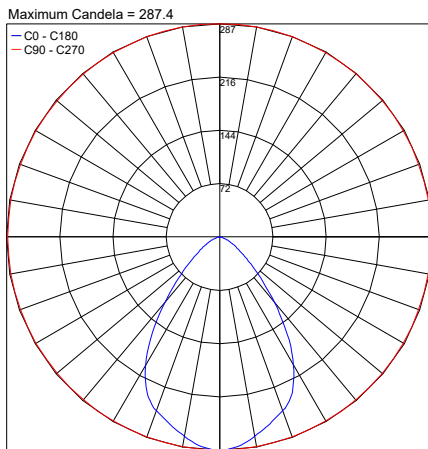


PHOTOMETRIC FILENAME : GINKO 3.3 X 32°X73° [RGBW 11W].IES

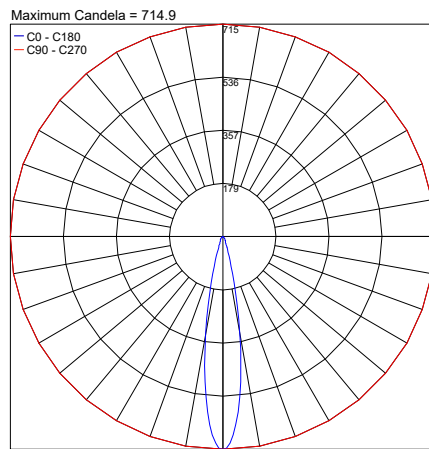


PHOTOMETRIC FILENAME : GINKO 3.3 S 19° [4000K 11W].IES

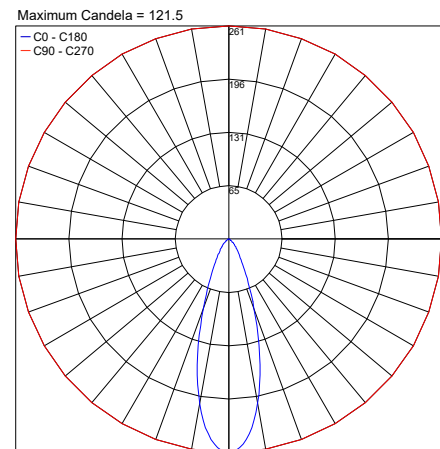

PHOTOMETRIC FILENAME : GINKO 3.3 M 33° [4000K 11W].IES

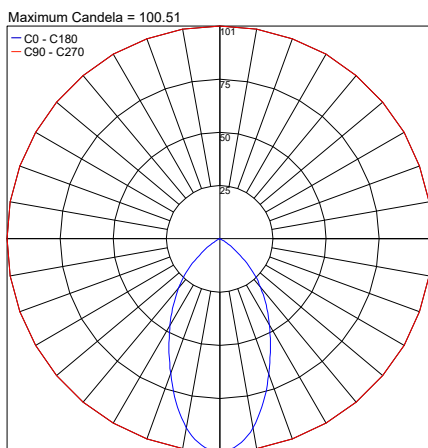

PHOTOMETRIC FILENAME : GINKO 3.3 L 56° [4000K 11W].IES

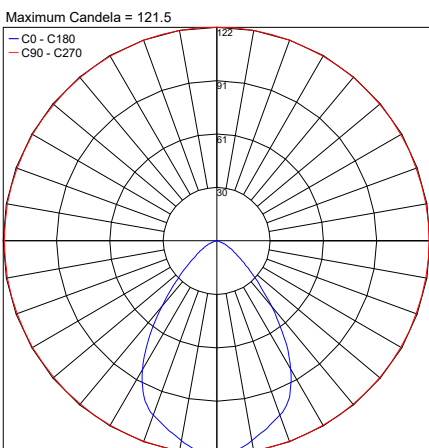

PHOTOMETRIC FILENAME : GINKO 3.3 X 32°X73° [4000K 11W].IES

Job Name/Date:

Fixture Type Designation: