


KANDOVAN H-270

Kandovan is a recessed, wall mounted LED that is perfect for walkways, fence walls and stairways. It is available in 2 sizes, one with wide optics and the other with asymmetric optics, and 3 Hard Coat Treatment finishes. Kandovan H-270 is the 10W, 5.7" x 10.9" version with symmetric wide optics.




TECHNICAL DATA

Wattage / Input	10W
Power Supply	Integral 120VAC
Dimming	None - On / Off
Construction	Body/Frame: AISI 316L Stainless Steel Optical Reflector for Grazing Light in AISI 316L Stainless Steel
CCT	2200K, 2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	987 lm per beam (3000K)
Efficacy	98.7 lm/W per beam (3000K)
Optics	Symmetrical
BUG Rating	B0-U2-G0 (3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	10.91" h x 5.71" w (H-270)
IP Rating	IP65
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components



Fixture Dimensions



Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION


Example: SPT2023036B.US. Accessories sold separately.

SPT20230				.US
Model No.	CCT	Optics	Finishes	
SPT20230 (H-270)	1 - 2200K 2 - 2700K 3 - 3000K 4 - 4000K	6 - Symmetrical <i>(only on the H270 version)</i>	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

FINISHES

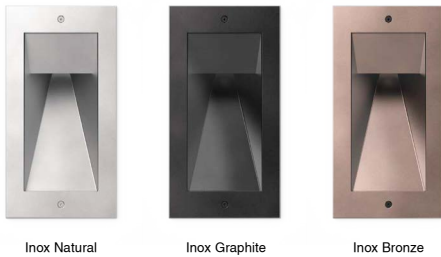


Inox Natural

Inox Graphite

Inox Bronze

ACCESSORIES

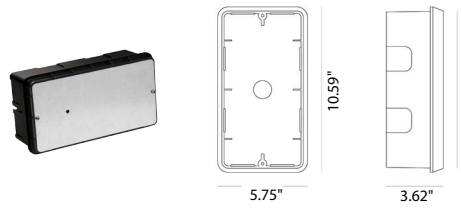


PT50000
Outer Casing
for KANDOVAN H270

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

Maximum Candela = 184.6

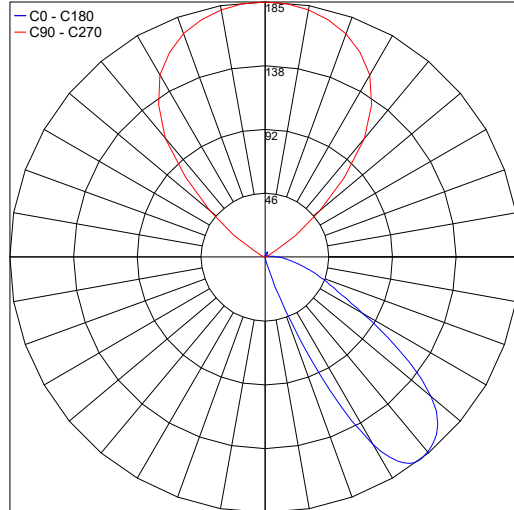

PHOTOMETRIC FILENAME : KANDOVAN H130 ASYM 30K - PT2022035B.IES

Maximum Candela = 523.3

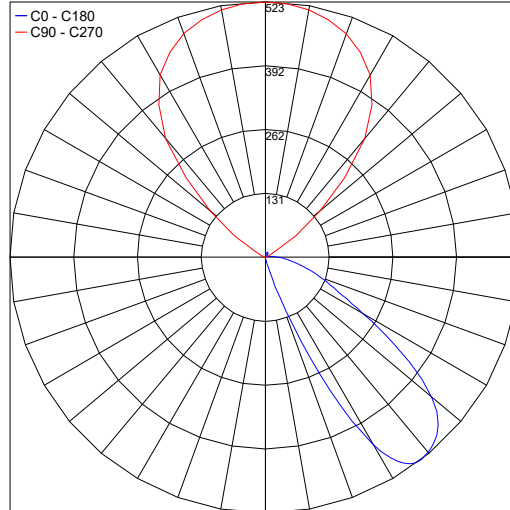

PHOTOMETRIC FILENAME : KANDOVAN H270 SYM 30K - PT2023036B.IES

Job Name/Date:

Fixture Type Designation: