

Kandovan is a recessed, wall mounted LED that is perfect for walkways, fence walls and stairways. It is available in 2 sizes, one with wide optics and the other with asymmetric optics, and 3 Hard Coat Treatment finishes.




TECHNICAL DATA

Wattage / Input	3W (KANDOVAN H130) 10W (KANDOVAN H270)
Power Supply	Remote (Consult Factory)
Dimming	See Power Supplies
Construction	Body/Frame: AISI 316L Stainless Steel Optical Reflector for Grazing Light in AISI 316L Stainless Steel
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	197 lm per beam (3000K) 987 lm per beam (3000K)
Efficacy	65.7 lm/W per beam (3000K) 98.7 lm/W per beam (3000K)
Optics	Wide, Symmetrical
BUG Rating	B0-U1-G0 (H130 Asym - 3000K)) B0-U2-G0 (H270 Sym - 3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	5.24" h x 2.95" w (KANDOVAN H130) 10.91" h x 5.71" w (KANDOVAN H270)
IP Rating	IP65
Impact Resistance	IK08

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

Fixture Dimensions - See page 2



ORDERING INFORMATION


Example: SPT2022035B.US. Power Supplies / Accessories sold separately.

				.US
Model No.	CCT	Optics	Finishes	
SPT20220 (H130)	2 - 2700K 3 - 3000K	5 - Asymmetric Wide (only on the H130 version)	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US
SPT20230 (H270)	4 - 4000K	6 - Symmetric Wide (only on the H270 version)		

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

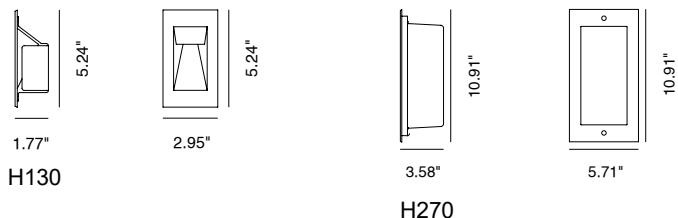

FINISHES




H130




H270

ACCESSORIES

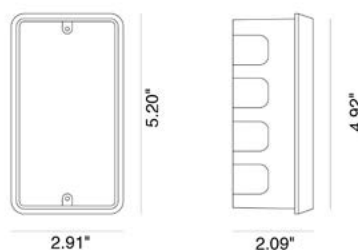

PT50010
Outer Casing
for KANDOVAN H130

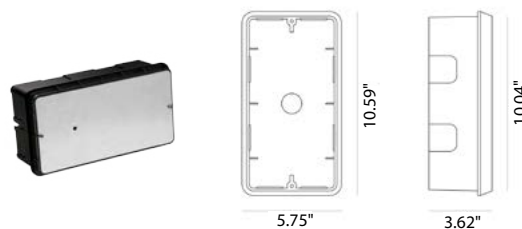


PT50000
Outer Casing
for KANDOVAN H270

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

Maximum Candela = 184.6

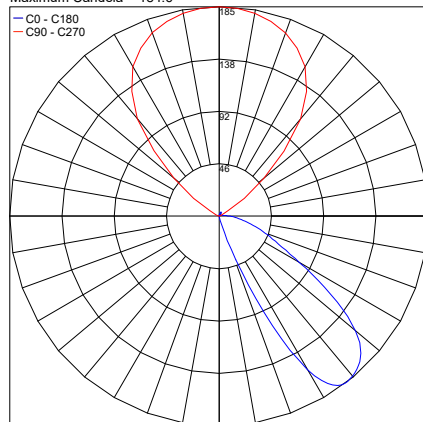

PHOTOMETRIC FILENAME : KANDOVAN H130 ASYM 30K - PT2022035B.IES

Maximum Candela = 523.3

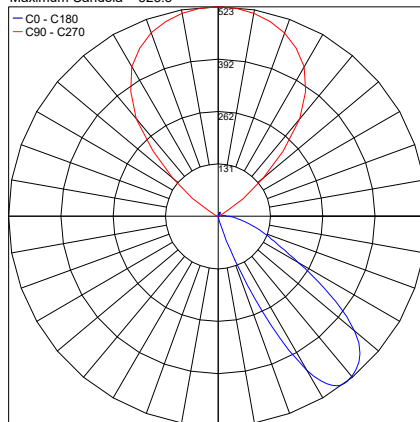

PHOTOMETRIC FILENAME : KANDOVAN H270 SYM 30K - PT2023036B.IES

Job Name/Date:

Fixture Type Designation: