

Khori is an IP66-rated bollard made of stainless steel with 360° light emission that is perfect for lighting pathways and gardens. It is available in 2 versions, pole diameter of 1.6" or 2.8", and 4 different heights in each version, and 3 Hard Coat Treatment finishes. Khori D-40 is the 1.6" pole diameter version.



TECHNICAL DATA

Wattage / Input	7W
Power Supply	Integral 120VAC
Dimming	On/Off Only
Construction	Body: AISI 316L Stainless Steel Lens: Transparent Polycarbonate
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U1-G0 (3000K)
CRI	>80
Delivered Lumens	353 lm (3000K)
Efficacy	50.4 lm/W
Optics	360° (Rotosymmetrical)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Head: Ø2.8" Ø1.6" Pole x 11.8", 19.7", 27.6" or 35.4" (D-40)
IP Rating	IP66
Impact Resistance	IK07

Fixture Dimensions



Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION


Example: SPT6074375B.US. Power Supplies / Accessories sold separately.

SPT6074		7			.US
Model No.	CCT	Optics	Height	Finishes	
SPT6074 (D-40)	2 - 2700K	7 - 360°	3 - 11.8"	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US
	3 - 3000K		5 - 19.7"		
	4 - 4000K		7 - 27.6"		
			9 - 35.4"		


Job Name/Date:

Fixture Type Designation:

ACCESSORIES




PT68000
Flange with 4 Anchor Bolts
for KHORI
(REQUIRED)



PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 114.2

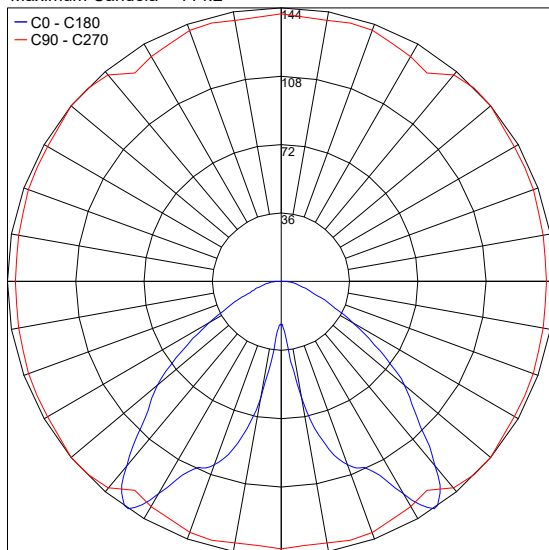

PHOTOMETRIC FILENAME : KHORI D-40 30CM - PT6074373N.IES

Job Name/Date:

Fixture Type Designation: