


Khori is an IP66-rated bollard made of stainless steel with 360° light emission that is perfect for lighting pathways and gardens. It is available in 2 versions, pole diameter of 1.6" or 2.8", and 4 different heights in each version, and 3 Hard Coat Treatment finishes. Khori D-70 is the 2.8" pole diameter version.



TECHNICAL DATA

| | |
|---------------------------|--|
| Wattage / Input | 7W |
| Power Supply | Integral 120VAC |
| Dimming | On/Off Only |
| Construction | Body: AISI 316L Stainless Steel Lens: Transparent Polycarbonate |
| CCT | 2700K, 3000K, 4000K |
| BUG Rating | B0-U1-G0 (3000K) |
| CRI | >85 |
| Delivered Lumens | 353 lm (3000K) |
| Efficacy | 50.4 lm/W |
| Optics | 360° (Rotosymmetrical) |
| Lumen Maintenance | 100,000 hrs L80, B10 (Ta 25°C) |
| Hard Coat Finishes | Inox Natural, Inox Graphite, Inox Bronze |
| Fixture Dimensions | Head: Ø2.8" Ø2.8" Pole x 11.8", 19.7", 27.6" or 35.4" (D-70) |
| IP Rating | IP66 |
| Impact Resistance | IK07 |
| Warranty | 10 Years Against Corrosion 5 Years on Electrical Components |

Fixture Dimensions

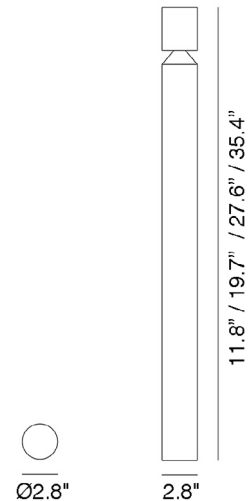

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

ORDERING INFORMATION


Example: SPT6077375B.US. Power Supplies / Accessories sold separately.

| SPT6077 | | 7 | | | .US |
|----------------|-----------|----------|-----------|-------------------|-----|
| Model No. | CCT | Optics | Height | Finishes | |
| SPT6077 (D-70) | 2 - 2700K | 7 - 360° | 3 - 11.8" | N - Inox Natural | .US |
| | 3 - 3000K | | 5 - 19.7" | G - Inox Graphite | |
| | 4 - 4000K | | 7 - 27.6" | B - Inox Bronze | |
| | | | 9 - 35.4" | | |

Job Name/Date:

Fixture Type Designation:

ACCESSORIES




PT68000
Flange with 4 Anchor Bolts
for KHORI
(REQUIRED)



PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 144.2

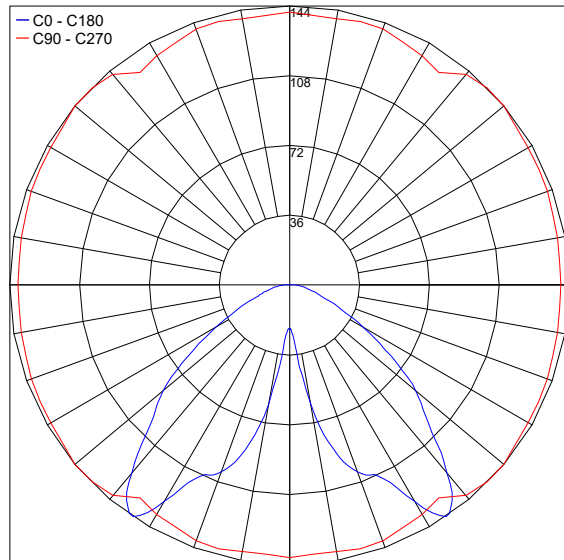

PHOTOMETRIC FILENAME : KHORI D-70 30CM - PT6074373N.IES

Job Name/Date:

Fixture Type Designation: