

# KHORI D-70

Khori is an IP66-rated bollard made of stainless steel with 360° light emission that is perfect for lighting pathways and gardens. It is available in 2 versions, pole diameter of 1.6" or 2.8", and 4 different heights in each version, and 3 Hard Coat Treatment finishes. Khori D-70 is the 2.8" pole diameter version.




## TECHNICAL DATA

<b>Wattage / Input</b>	7W
<b>Power Supply</b>	Integral 120VAC
<b>Dimming</b>	On/Off Only
<b>Construction</b>	Body: AISI 316L Stainless Steel Lens: Transparent Polycarbonate
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0 (3000K)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	353 lm (3000K)
<b>Efficacy</b>	50.4 lm/W
<b>Optics</b>	360° (Rotosymmetrical)
<b>Lumen Maintenance</b>	100,000 hrs L80, B10 (Ta 25°C)
<b>Hard Coat Finishes</b>	Inox Natural, Inox Graphite, Inox Bronze
<b>Fixture Dimensions</b>	Head: Ø2.8" Ø2.8" Pole x 11.8", 19.7", 27.6" or 35.4" (D-70)
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK07

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

Fixture Dimensions

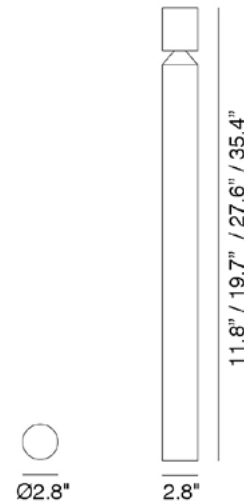

## ORDERING INFORMATION


Example: SPT6077375B.US. Power Supplies / Accessories sold separately.

SPT6077		7			.US
Model No.	CCT	Optics	Height	Finishes	
SPT6077 (D-70)	2 - 2700K 3 - 3000K 4 - 4000K	7 - 360°	3 - 11.8" 5 - 19.7" 7 - 27.6" 9 - 35.4"	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US


Job Name/Date:

Fixture Type Designation:

## ACCESSORIES




**PT68000**  
Flange with 4 Anchor Bolts  
for KHORI  
(REQUIRED)



## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 144.2

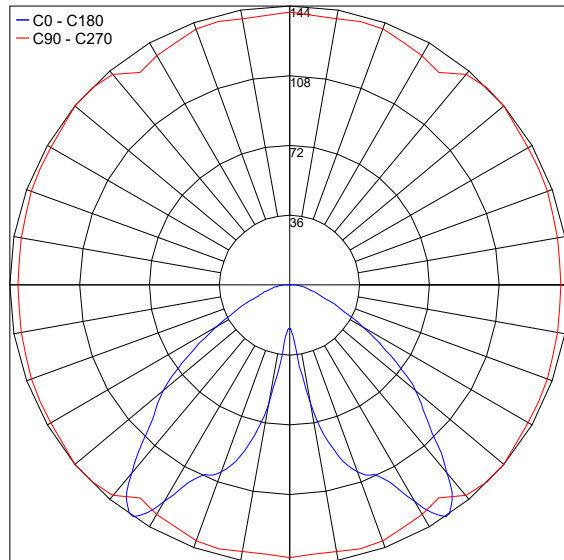

PHOTOMETRIC FILENAME : KHORI D-70 30CM - PT6074373N.IES

Job Name/Date:

Fixture Type Designation: