

Khori is an IP66-rated bollard made of stainless steel with 360° light emission that is perfect for lighting pathways and gardens. It is available in 2 versions, pole diameter of 1.6" or 2.8", and 4 different heights in each version, and 3 Hard Coat Treatment finishes.



KHORI D-40



KHORI D-70

Fixture Dimensions - See page 2

TECHNICAL DATA

Wattage / Input	7W
Power Supply	Integral 120VAC
Dimming	On/Off Only
Construction	Body: AISI 316L Stainless Steel Lens: Transparent Polycarbonate
CCT	2700K, 3000K, 4000K
BUG Rating	B0-U1-G0 (3000K - D-40 & D-70)
CRI	>80
Delivered Lumens	353 lm (3000K)
Efficacy	50.4 lm/W
Optics	360° (Rotosymmetrical)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Head: Ø2.8" Ø1.6" Pole x 11.8", 19.7", 27.6" or 35.4" (D-40) Ø2.8" Pole x 11.8", 19.7", 27.6" or 35.4" (D-70)
IP Rating	IP66
Impact Resistance	IK07

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes *Inox Natural, Inox Graphite and Inox Bronze*. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION

Example: SPT6074375B.US. Power Supplies / Accessories sold separately.

		7			.US
Model No.	CCT	Optics	Height	Finishes	
SPT6074 (D-40)	2 - 2700K	7 - 360°	3 - 11.8"	N - Inox Natural	.US
SPT6077 (D-70)	3 - 3000K		5 - 19.7"	G - Inox Graphite	
	4 - 4000K		7 - 27.6"	B - Inox Bronze	
			9 - 35.4"		


Job Name/Date:

Fixture Type Designation:


FIXTURE DIMENSIONS

D-40

D-70

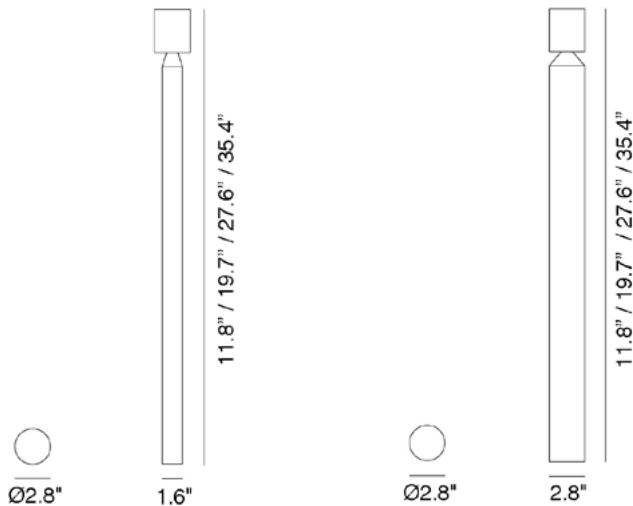

ACCESSORIES

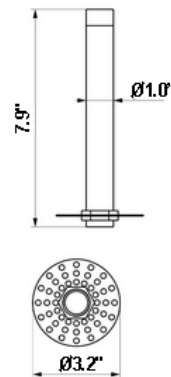**PT68000**

Flange with 4 Anchor Bolts
for KHORI
(REQUIRED)

Job Name/Date:

Fixture Type Designation:

Job Name/Date:

Fixture Type Designation: