

Klaatu is an outdoor LED bollard offered in 3 different heights, 2-foot, 3-foot or 4-foot. It is offered in 4 color temperatures, integral driver, and 5 standard finishes. Dark Sky compliant for output below 80°.




**MADE IN THE U.S.A.**

## TECHNICAL DATA

<b>Wattage</b>	15W (Static White)
<b>Power Supply</b>	Integral 120VAC Lutron Dimming 120-277VAC Also Available - (Consult Factory)
<b>Dimming</b>	0-10V Dimming
<b>Construction</b>	Body: Aluminum Lens: Clear Frosted
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>BUG Rating</b>	B0-U1-G0 (3000K)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	227 lm (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	15.1 lm/W
<b>Optics</b>	180°
<b>Finishes</b>	5 Standard, Custom RAL on request
<b>Fixture Dimensions</b>	4.0" w x 4.0" or 24.13", 36.13" or 48.13" h
<b>IP Rating</b>	IP65

## Fixture Dimensions

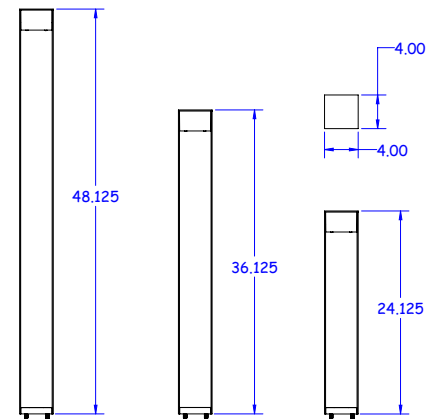

## ORDERING INFORMATION


Example: KLA-L-3-40-02-C-0. Accessories / Power Supplies ordered separately.

KLA-L	-		-		-		-	0
Model #	Height	CCT	Finish	Dimming	Options			
KLA-L	2 - 2 ft.	27 - 2700K	11 - White Suede	C - Integral 120VAC - 0-10V Dimming	0 - None			
	3 - 3 ft.	30 - 3000K	02 - Black Suede	L - Lutron Dimming Driver 120-277VAC (Consult Factory)				
	4 - 4 ft.	35 - 3500K	03 - Gray					
		40 - 4000K	18 - Tex. Bronze					
			TS - Silver					
			C - Custom					

Job Name/Date:

Fixture Type Designation:


## ACCESSORIES - Installation

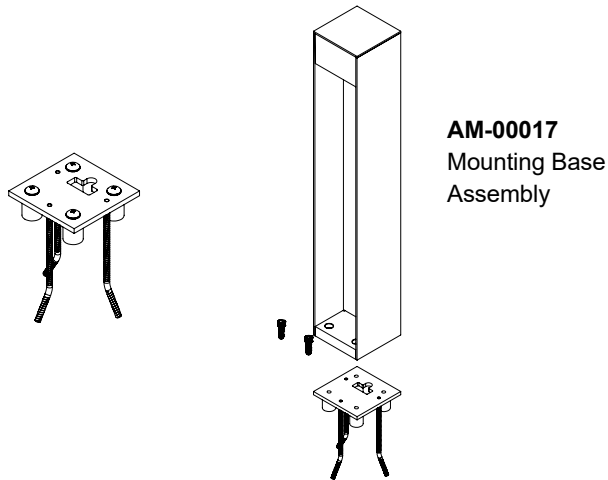

## PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 554.7

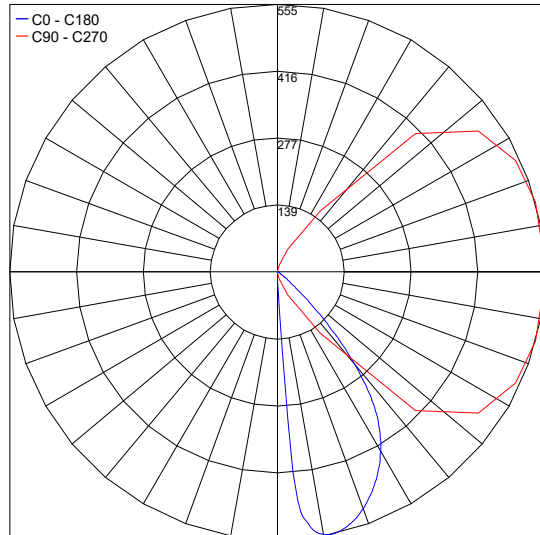

PHOTOMETRIC FILENAME : KLAATU - LLIA002261-003.IES

Job Name/Date:

Fixture Type Designation: