


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY N-180 is the Ø6.8" 12W or 18W version.



## TECHNICAL DATA

|                           |  |
|---------------------------|--|
| <b>Wattage / Input</b>    | 12W or 18W (N-180)   |
| <b>Power Supply</b>       | Integral 120VAC  |
| <b>Construction</b>       | Body: AISI 316L Stainless Steel<br>Lens: 0.31" Extra-clear, Tempered Glass |
| <b>CCT</b>                | 2700K, 3000K, 4000K  |
| <b>CRI</b>                | >85  |
| <b>BUG Rating</b>         | B0-U5-G0 (3000K)   |
| <b>Delivered Lumens</b>   | 1540 lm (6.8", 12W, 3000K)   |
| <b>Efficacy</b>           | 128.3 lm/W (6.8", 12W, 3000K)  |
| <b>Optics</b>             | 21°, 45°, 65°  |
| <b>BUG Rating</b>         | B0-U5-G0 (3000K)   |
| <b>Lumen Maintenance</b>  | 100,000 hrs L80, B10 (Ta 25°C)   |
| <b>Hard Coat Finishes</b> | Inox Natural, Inox Graphite, Inox Bronze                                   |
| <b>Fixture Dimensions</b> | Ø6.81" x 6.69" (N-180)   |
| <b>IP Rating</b>          | IP66, IP67   |
| <b>Impact Resistance</b>  | IK09   |
| <b>Warranty</b>           | 10 Years Against Corrosion<br>5 Years on Electrical Components             |

Fixture Dimensions

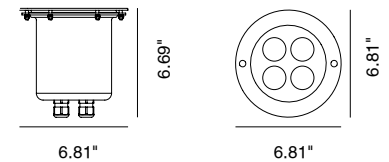

**Hard Coating Treatment** is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.

## ORDERING INFORMATION

Example: SPT1012036B.US. Power Supplies / Accessories sold separately.

|                        |            |               |                   |                         |     |
|------------------------|------------|---------------|-------------------|-------------------------|-----|
|                        |            |               |                   |                         | .US |
| <b>Model No.</b>       | <b>CCT</b> | <b>Optics</b> | <b>Finishes</b>   | <b>Honeycomb Filter</b> |     |
| SPT10120 (N-180 - 12W) | 2 - 2700K  | 2 - 21°       | N - Inox Natural  | None                    | .US |
| SPT10130 (N-180 - 18W) | 3 - 3000K  | 4 - 45°       | G - Inox Graphite | H - Horizontal          |     |
|                        | 4 - 4000K  | 6 - 65°       | B - Inox Bronze   |                         |     |

Job Name/Date:

Fixture Type Designation:

## FINISHES



Inox Natural




Inox Graphite



Inox Bronze


## ACCESSORIES



**PT52219**  
Outer Casing  
for OLY N-180

## PHOTOMETRIC DATA


NOTE: All photometry is 3000K

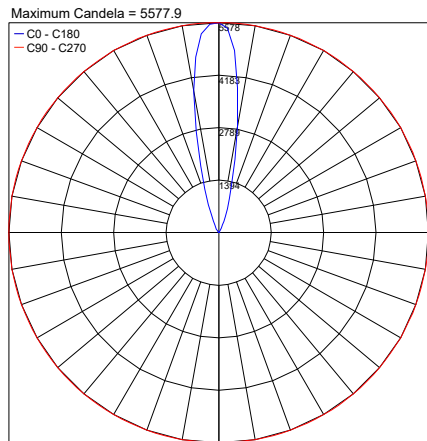

PHOTOMETRIC FILENAME : OLY N180 12W 3000K 21° - PT1012032B.IES


N-180 (12W)

21°

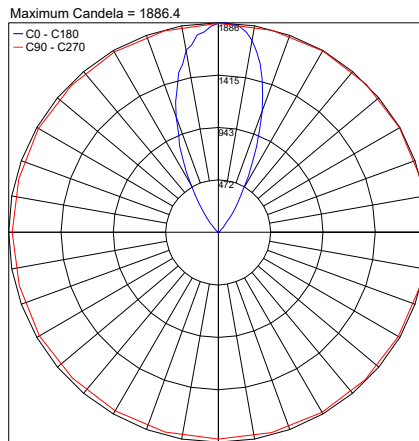

PHOTOMETRIC FILENAME : OLY N180 12W 3000K 45 0176 - PT1012034B.IES

45°

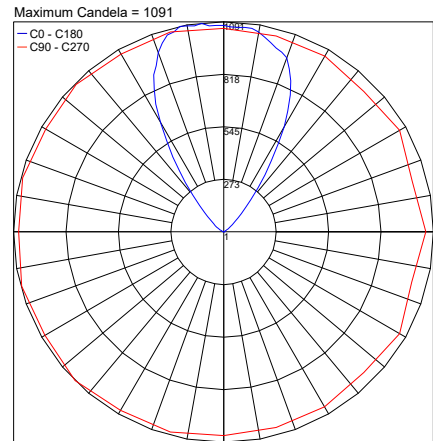

PHOTOMETRIC FILENAME : OLY N180 12W 3000K 65 0176 - PT1012036B.IES

65°

Job Name/Date:

Fixture Type Designation: