

OLY N-180


OLY is a round, recessed, stainless steel LED uplight suitable for outdoor installation in the ground or floor for illuminating facades and architectural spaces. It is available in 3 sizes, with 4 color temperatures, 3 optic options, and 3 Hard Coat Treatment finishes. OLY N-180 is the Ø6.8" 12W or 18W version.



TECHNICAL DATA

Wattage / Input	12W or 18W (N-180)
Power Supply	Integral 120VAC
Construction	Body: AISI 316L Stainless Steel Lens: 0.31" Extra-clear, Tempered Glass
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	1540 lm (6.8", 12W, 3000K)
Efficacy	128.3 lm/W (6.8", 12W, 3000K)
Optics	21°, 45°, 65°
BUG Rating	B0-U5-G0 (3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	Ø6.81" x 6.69" (N-180)
IP Rating	IP66, IP67
Impact Resistance	IK09

Fixture Dimensions

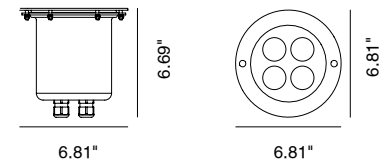

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain.

ORDERING INFORMATION

Example: SPT1012036B.US. Power Supplies / Accessories sold separately.

				.US
Model No.	CCT	Optics	Finishes	
SPT10120 (N-180 - 12W)	2 - 2700K	1 - 6°	N - Inox Natural	.US
SPT10130 (N-180 - 18W)	3 - 3000K	2 - 21°	G - Inox Graphite	
	4 - 4000K	4 - 45°	B - Inox Bronze	
		6 - 65°		
		7 - Wall Washer		

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural




Inox Graphite



Inox Bronze


ACCESSORIES



PT52219
Outer Casing
for OLY N-180

PHOTOMETRIC DATA


NOTE: All photometry is 3000K

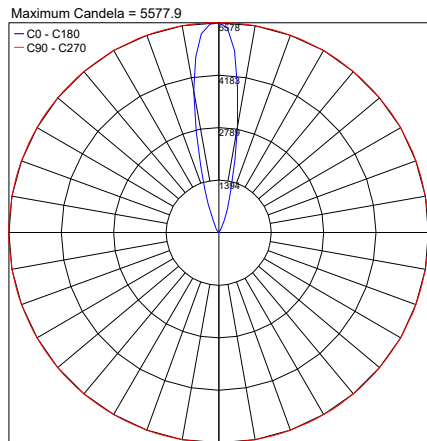

PHOTOMETRIC FILENAME : OLY N180 12W 3000K 21° - PT1012032B.IES


N-180 (12W)

21°

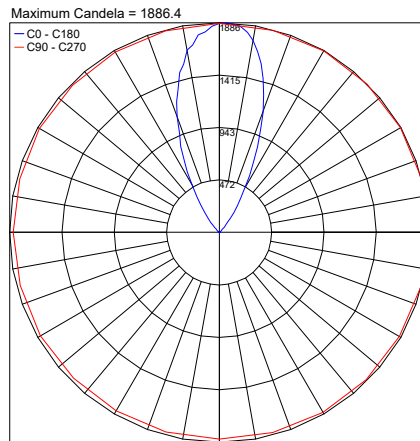

PHOTOMETRIC FILENAME : OLY N180 12W 3000K 45 0176 - PT1012034B.IES

45°

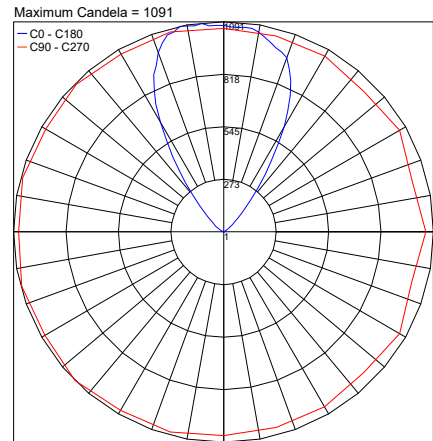

PHOTOMETRIC FILENAME : OLY N180 12W 3000K 65 0176 - PT1012036B.IES

65°

Job Name/Date:

Fixture Type Designation: