



TRIXIE ROUND

- Slim rectangular or round luminaire for installation on wall – surface or recessed.
- Configuration: die-cast aluminum structure, EN AB-47100 alloy (low copper content). Moulded transparent polycarbonate emitting unit (rectangular) or transparent polyurethane resin filling (round) and polished aluminum reflector fixed by double-sided technical tape.
- Double layer coating for high resistance to corrosion: the aluminum components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminum fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- Installation: the luminaire is equipped with a piece of cable for an easy-to-make connection. 24V feeding: power supply installed in a remote position; Outdoor use requires suitable flexible cables.

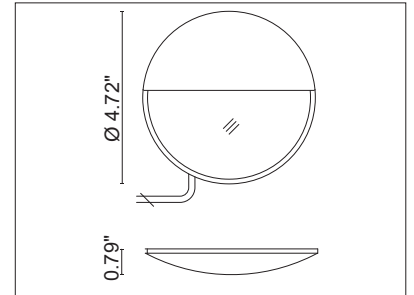

Recessed wall fitting.

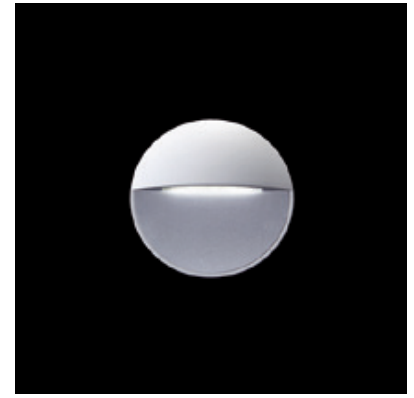

Wall fitting



Pre-wired with approx 9.84" of cable.



Remote device required.



Protection against impact.
IK08 - 5.00 joule

Job Name:

Fixture Type:

Last Modified:



sales@designplan.com
www.designplan.com

TRIXIE ROUND

Trixie Round Low-Power LED / Transparent Diffuser

U526002

NATURAL WHITE 4000K

LOW-POWER LEDs

1.5W/24VDC

Total power 1.9W

lm LED 156 ≠ lm OUTPUT 74

CRI >80

Remote electronic power supply
to be ordered

U526003

WARM WHITE 3000K

LOW-POWER LEDs






1.5W/24VDC

Total power 1.9W

lm LED 149 ≠ lm OUTPUT 71

CRI >80

Remote electronic power supply
to be ordered

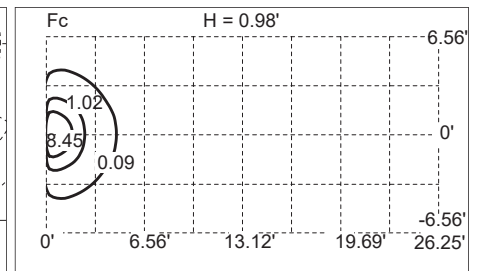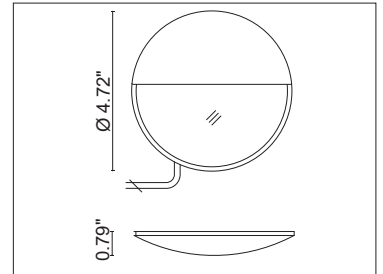

Job Name:

Fixture Type:

Last Modified:



Rated IP65
Intertek

designplan 

sales@designplan.com
www.designplan.com

© Copyright 2017 Designplan Lighting Inc.

79 Trenton Ave
Frenchtown, NJ 08825

Tel: 908-996-7710
Fax: 908-996-7042

POWER SUPPLIES

24VDC

PPLT00275

[120-277VAC to 24VDC 12W](#)

1-6 Fixtures

PPLT00156

[120-277VAC to 24VDC 45W](#)

1-24 Fixtures

Job Name:

Fixture Type:

Last Modified:



sales@designplan.com
www.designplan.com