TRIXIE ROUND

- Slim rectangular or round luminaire for installation on wall - surface or recessed.
- Configuration: die-cast aluminum structure, EN AB-47100 alloy (low copper content). Moulded transparent polycarbonate emitting unit (rectangular) or transparent polyurethane resin filling (round) and polished aluminum reflector fixed by double-sided technical tape.
- Double layer coating for high resistance to corrosion: the aluminum components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminum fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- Installation: the luminaire is equipped with a piece of cable for an easy-to-make connection. 24V feeding: power supply installed in a remote position; Outdoor use requires suitable flexible cables.

.1 White	.6 Grey	.3 Anthracite	.4 Black	.18 Deep Brown
	Recessed wall fitting.		Wall fi	tting
_ _	Pre-wired with appro 9.84" of cable.	DX	Remot	e device required.
	Protection against impact. IK08 - 5.00 joule			

Job Name:

Fixture Type:

Last Modified:






© Copyright 2017 Designplan Lighting Inc.

79 Trenton Ave Frenchtown, NJ 08825 sales@designplan.com www.designplan.com

> Tel: 908-996-7710 Fax: 908-996-7042





TRIXIE ROUN

Trixie Round Low-Power LED / Transparent Diffuser


U526002

NATURAL WHITE 4000K LOW-POWER LEDs 1.5W/24VDC Total power 1.9W Im LED 156 ≠ Im OUTPUT 74 CRI >80 Remote electronic power supply to be ordered


U526003


WARM WHITE 3000K LOW-POWER LEDs 1.5W/24VDC Total power 1.9W Im LED 149 ≠ Im OUTPUT 71 CRI >80 Remote electronic power supply to be ordered







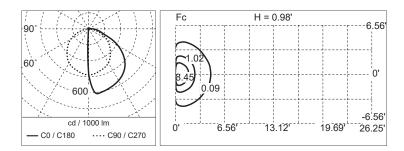

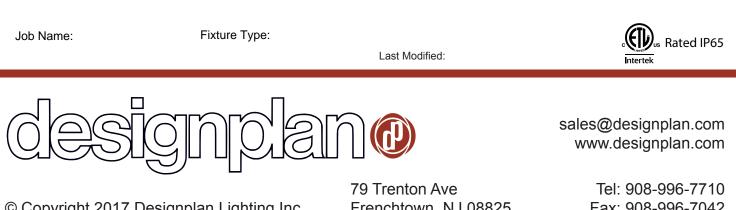

© Copyright 2017 Designplan Lighting Inc.

Frenchtown, NJ 08825

Fax: 908-996-7042

POWER SUPPLIES

24VDC

PPLT00275	120-277VAC to 24VDC 12W	1-6 Fixtures
PPLT00056	120-277VAC to 24VDC 26W	1-13 Fixtures
PPLT00156	120-277VAC to 24VDC 45W	1-24 Fixtures

Job Name:

Fixture Type:

Last Modified:



sales@designplan.com www.designplan.com

© Copyright 2017 Designplan Lighting Inc.

79 Trenton Ave Frenchtown, NJ 08825 Tel: 908-996-7710 Fax: 908-996-7042